

Specifications

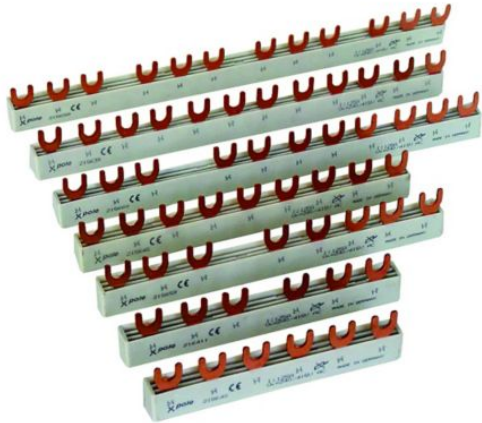


Photo is representative

Eaton 215639

Eaton Moeller series xPole - Busbar. EV busbars 3Ph., 12HP, 63A for PLS. CLS. PKN., PFIM, PFHM, PFNM

General specifications

| | |
|-----------------------------|-----------------------------|
| PRODUCT NAME | Eaton Moeller series busbar |
| CATALOG NUMBER | 215639 |
| MODEL CODE | EVG-3PHAS/12MODUL |
| EAN | 4015082156398 |
| PRODUCT LENGTH/DEPTH | 210 mm |
| PRODUCT HEIGHT | 30 mm |
| PRODUCT WIDTH | 10 mm |
| PRODUCT WEIGHT | 0.089 kg |
| COMPLIANCES | RoHS conform |
| GLOBAL CATALOG | 215639 |



Powering Business Worldwide

Product specifications

| | |
|---|--|
| USED WITH | EVG Busbar |
| TYPE | <ul style="list-style-type: none">• Busbar• EVG |
| FEATURES | Insulated |
| ACCESSORY/SPARE PART TYPE | Busbar for residual current circuit breakers Busbar for miniature circuit breaker Busbar for combined residual current/power circuit breaker |
| ELECTRIC CONNECTION TYPE | Fork |
| RATED SURGE VOLTAGE | 4 kV |
| RATED UNINTERRUPTED CURRENT (IU) | 63 A |
| SUITABLE FOR NUMBER OF DEVICES | 4 |
| NUMBER OF POLES | Three-pole |
| COLOR | Other |
| RATED SHORT-TIME WITHSTAND CURRENT (ICW) | 0 kA |
| CROSS SECTION | 10 mm ² |
| NUMBER OF MODULAR SPACINGS | 12 |
| NUMBER OF PHASES | 3 |
| PITCH DIMENSIONS | 0 mm |
| RATED OPERATIONAL VOLTAGE (UE) - MAX | 500 V |
| RATED CONDITIONAL SHORT-CIRCUIT CURRENT (IQ) | 25 kA |
| FUNCTIONS | Busbar |
| SUITABLE FOR | 4 devices |

Resources

| | |
|-------------------------------|---|
| DECLARATIONS OF CONFORMITY | eaton-busbar-declaration-of-conformity-eu250210en.pdf |
| DRAWINGS | eaton-busbar-3d-drawing.jpg |
| SPECIFICATIONS AND DATASHEETS | Eaton Specification Sheet - 215639 |

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

Follow us on social media to get the latest product and support information.



© 2025 Eaton. All Rights Reserved.