

# Specifications

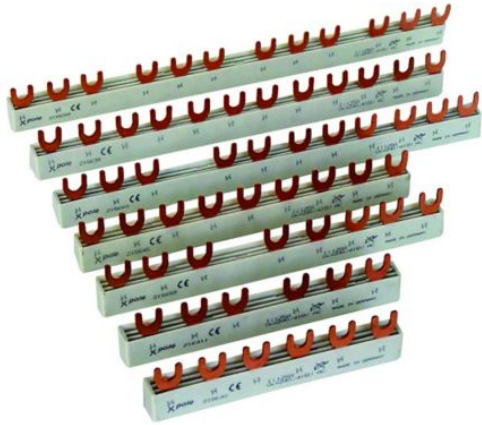


Photo is representative

## Eaton 215641

Eaton Moeller series xPole - Busbar. Phase busbar, 2-phases, 10qmm, fork connector, 12SU

### General specifications

<b>PRODUCT NAME</b>	Eaton Moeller series busbar
<b>CATALOG NUMBER</b>	215641
<b>MODEL CODE</b>	EVG-2PHAS/12MODUL
<b>EAN</b>	9010238140332
<b>PRODUCT LENGTH/DEPTH</b>	210 mm
<b>PRODUCT HEIGHT</b>	30 mm
<b>PRODUCT WIDTH</b>	10 mm
<b>PRODUCT WEIGHT</b>	0.062 kg
<b>COMPLIANCES</b>	RoHS conform
<b>CERTIFICATIONS</b>	CE
<b>GLOBAL CATALOG</b>	215641



Powering Business Worldwide

## Product specifications

<b>USED WITH</b>	EVG Busbar
<b>TYPE</b>	<ul style="list-style-type: none"><li>• Busbar</li><li>• EVG</li></ul>
<b>FEATURES</b>	Insulated
<b>ACCESSORY/SPARE PART TYPE</b>	Busbar for combined residual current/power circuit breaker Busbar for residual current circuit breakers Busbar for miniature circuit breaker
<b>ELECTRIC CONNECTION TYPE</b>	Fork
<b>RATED SURGE VOLTAGE</b>	4 kV
<b>RATED UNINTERRUPTED CURRENT (IU)</b>	63 A
<b>SUITABLE FOR NUMBER OF DEVICES</b>	6
<b>NUMBER OF POLES</b>	Two-pole
<b>COLOR</b>	Other
<b>RATED SHORT-TIME WITHSTAND CURRENT (ICW)</b>	0 kA
<b>CROSS SECTION</b>	10 mm <sup>2</sup>
<b>NUMBER OF MODULAR SPACINGS</b>	12
<b>NUMBER OF PHASES</b>	2
<b>PITCH DIMENSIONS</b>	0 mm
<b>RATED OPERATIONAL VOLTAGE (UE) - MAX</b>	500 V
<b>RATED CONDITIONAL SHORT-CIRCUIT CURRENT (IQ)</b>	25 kA
<b>FUNCTIONS</b>	Busbar
<b>SUITABLE FOR</b>	6 devices

## Resources

DECLARATIONS OF CONFORMITY	<a href="#">eaton-busbar-declaration-of-conformity-eu250210en.pdf</a>
DRAWINGS	<a href="#">eaton-busbar-3d-drawing.jpg</a>

---

**PROJECT NAME:**

**PROJECT NUMBER:**

**PREPARED BY:**

**DATE:**

---



**Eaton Corporation plc**

Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

Follow us on social media to get the latest product and support information.

