


Specifications

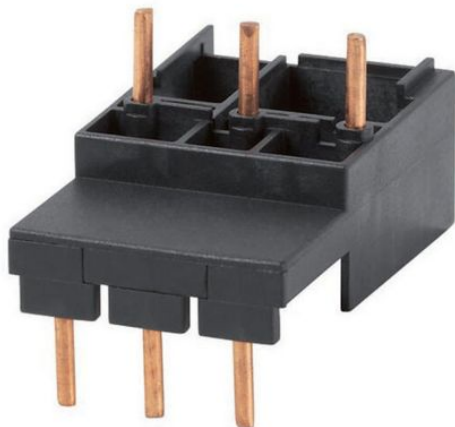

Eaton 239349

Eaton Moeller® series PKZM0 Wiring module, for DILM17-M32

General specifications

PRODUCT NAME	Eaton Moeller® series PKZM0 Accessory Wiring module
CATALOG NUMBER	239349
MODEL CODE	PKZM0-XM32DE
EAN	4015082393496
PRODUCT LENGTH/DEPTH	67 mm
PRODUCT HEIGHT	41 mm
PRODUCT WIDTH	36 mm
PRODUCT WEIGHT	0.023 kg
CERTIFICATIONS	UL Category Control No.: NLRV CSA-C22.2 No. 14 IEC/EN 60947-4-1 CSA File No.: 165628 UL CE CSA UL File No.: E36332 CSA Class No.: 3211-05 UL 508
GLOBAL CATALOG	239349



Powering Business Worldwide

Product specifications

RATED OPERATIONAL VOLTAGE (UE) - MAX	415 VAC
10.10 TEMPERATURE RISE	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.
10.2.2 CORROSION RESISTANCE	Meets the product standard's requirements.
10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES	Meets the product standard's requirements.
10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT	Meets the product standard's requirements.
10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS	Meets the product standard's requirements.
10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION	Meets the product standard's requirements.
10.2.5 LIFTING	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 MECHANICAL IMPACT	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 INSCRIPTIONS	Meets the product standard's requirements.
10.3 DEGREE OF PROTECTION OF ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 CLEARANCES AND	Meets the product

Resources

BROCHURES	eaton-motor-starters-system-xstart-brochure-br03407001en-en-us.pdf
CATALOGS	Product Range Catalog Switching and protecting motors eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf
DECLARATIONS OF CONFORMITY	eaton-accessory-declaration-of-conformity-uk251183en.pdf eaton-accessory-declaration-of-conformity-eu250700en.pdf
DRAWINGS	eaton-manual-motor-starters-current-pkzm0-wiring-module-3d-drawing.eps
ECAD MODEL	ETN.239349.edz
INSTALLATION INSTRUCTIONS	IL03402007Z
INSTALLATION VIDEOS	WIN-WIN with push-in technology
MCAD MODEL	0_xm32de.dwg 0_xm32de.stp
SALES NOTES	eaton-link-module-for-motor-starters-pkz-flyer-fl034003en-en-us.pdf

CREEPAGE DISTANCES	standard's requirements.
10.5 PROTECTION AGAINST ELECTRIC SHOCK	Does not apply, since the entire switchgear needs to be evaluated.
10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
MODEL	Direct circuit
AMBIENT OPERATING TEMPERATURE - MAX	55 °C
AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID	1.5 W
HEAT DISSIPATION CAPACITY PDISS	0 W
HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID	0.5 W
RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)	32 A
STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS	0 W
SUITABLE FOR NUMBER OF POLES	3
PRODUCT CATEGORY	Accessories
RATED OPERATIONAL CURRENT (IE)	32 A

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

Follow us on social media to get the latest product and support information.



© 2025 Eaton. All Rights Reserved.