




Imaginile sunt doar cu titlu informativ

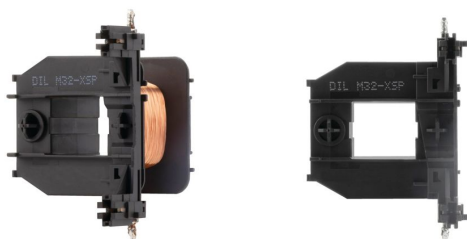

Eaton 281141

Eaton Moeller® series DILM Replacement coil, Tool-less plug connection, 230 V 50 Hz, 240 V 60 Hz, AC, For use with: DILM17, DILM25, DILM32, DILM38, DILMP32 - DILMP45

General specifications

PRODUCT NAME	Eaton Moeller® series DILM replacement coil
CATALOG NUMBER	281141
EAN	4015082811419
PRODUCT LENGTH/DEPTH	64 mm
PRODUCT HEIGHT	49 mm
PRODUCT WIDTH	46 mm
PRODUCT WEIGHT	0.048 kg
CERTIFICATIONS	CSA File No.: 012528 UL Category Control No.: NLDX CSA-C22.2 No. 14-05 CSA UL UL File No.: E29096 UL 508 CSA Class No.: 2411-03, 3211-04 IEC/EN 60947-4-1 CE
MODEL CODE	DILM32-XSP(230V50HZ,240V60HZ)

General

ACCESSORIES Individual coils

PRODUCT CATEGORY Accessories

VOLTAGE TYPE AC

Magnet system

RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MIN 230 V

RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MAX 230 V

RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MIN 240 V

RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MAX 240 V

RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MIN 0 V

RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MAX 0 V

Climatic environmental conditions

AMBIENT OPERATING TEMPERATURE - MIN -25 °C

AMBIENT OPERATING TEMPERATURE - MAX 60 °C

Design verification

10.2.2 CORROSION RESISTANCE Meets the product standard's requirements.

10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES Meets the product standard's requirements.

10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT Meets the product standard's requirements.

10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS Meets the product standard's requirements.

10.2.5 LIFTING Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 MECHANICAL IMPACT Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 INSCRIPTIONS Meets the product standard's requirements.

10.3 DEGREE OF PROTECTION OF ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated.

10.4 CLEARANCES AND CREEPAGE DISTANCES Meets the product standard's requirements.

10.5 PROTECTION AGAINST ELECTRIC SHOCK Does not apply, since the entire switchgear needs to be evaluated.

10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS Does not apply, since the entire switchgear needs to be evaluated.

10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS Is the panel builder's responsibility.

10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS Is the panel builder's responsibility.

10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH Is the panel builder's responsibility.

10.9.3 IMPULSE WITHSTAND VOLTAGE Is the panel builder's responsibility.

10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Resurse

INSTRUCȚIUNI DE
INSTALARE

[IL03407036Z](#)

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATA:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Irlanda
Eaton.com

Follow us on social media to get the latest product and support information.



© 2025 Eaton. Toate drepturile rezervate