

# ETIMAT P10 1p+N C4



## Specificatii

Cod ETI	001901126
Descriere	ETIMAT P10 1p+N C4
Denumire clasă	Întreprător de circuit
Func ie	MCB
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	C
Curent nominal (A)	4
Tensiunea nominală(V)	240
Număr de poli	1+N
Frecven ă nominală (Hz)	50/60
Standarde	EN/IEC 60898
Sec iune transversală nominală	1-25
Tipul voltajului	AC
Tensiunea nominala de rezistenta Uimp (kV)	6kV

[Pagina de produse online](#) 

## Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)

[Declaratie CE](#)

[Eplan mușchi](#)



## ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	C
Number of poles (total)	2
Number of protected poles	1
Rated current	4A
Rated voltage	240V
Rated insulation voltage $U_i$	500V
Rated impulse withstand voltage $U_{imp}$	6kV
Rated short-circuit breaking capacity $I_{cn}$ according to EN 60898 at 230 V	10kA
Rated short-circuit breaking capacity $I_{cn}$ according to EN 60898 at 400 V	10kA
Rated short-circuit breaking capacity $I_{cu}$ according to IEC 60947-2 at 230 V	10kA
Rated short-circuit breaking capacity $I_{cu}$ according to IEC 60947-2 at 400 V	10kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	2
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>
Connectable conductor cross section solid-core	1...25mm <sup>2</sup>

# Caracteristicile energiei de topire



# Caracteristici

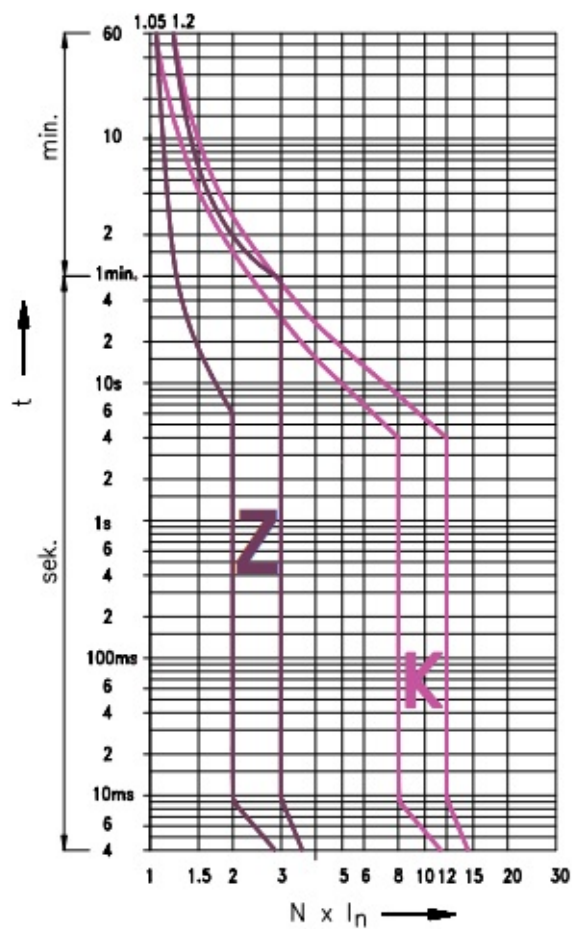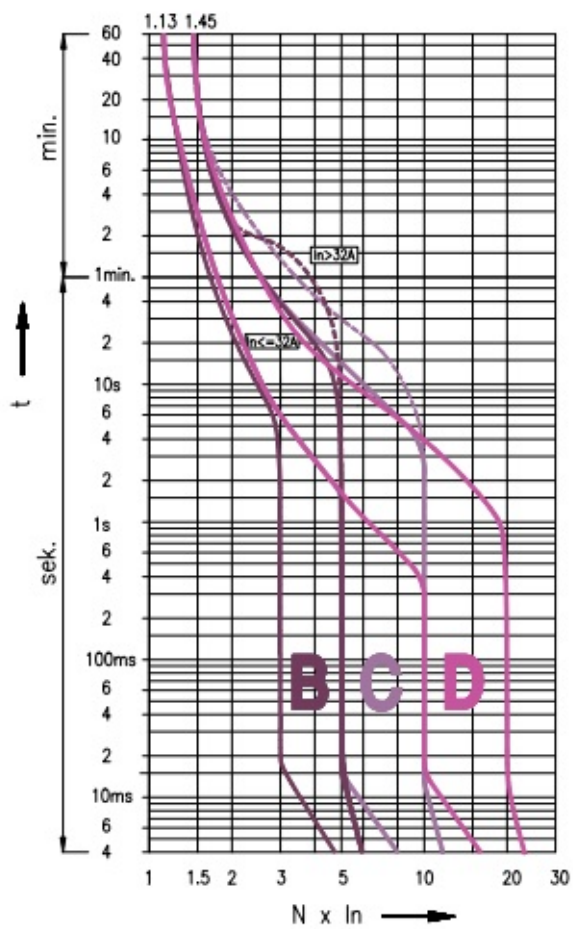

## Desen cotat



## Simbol/Conexiune

1p




1p+n



2p



3p



3p+n

