ETIM clasificare internationala

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	1
Number of protected poles	1
Rated current	1A
Rated voltage	230/400V
Rated insulation voltage Ui	500V
Rated impulse withstand voltage Uimp	6kV
Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity Icn according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50…60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	
Over voltage category	3
Pollution degree	3
Additional equipment possible	1
Width in number of modular spacings	1
Built-in depth	68mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-25…55°C
Connectable conductor cross section multi-wired	1…25mm²
Connectable conductor cross section solid-core	1…25mm²

Caracteristicile energiei de topire

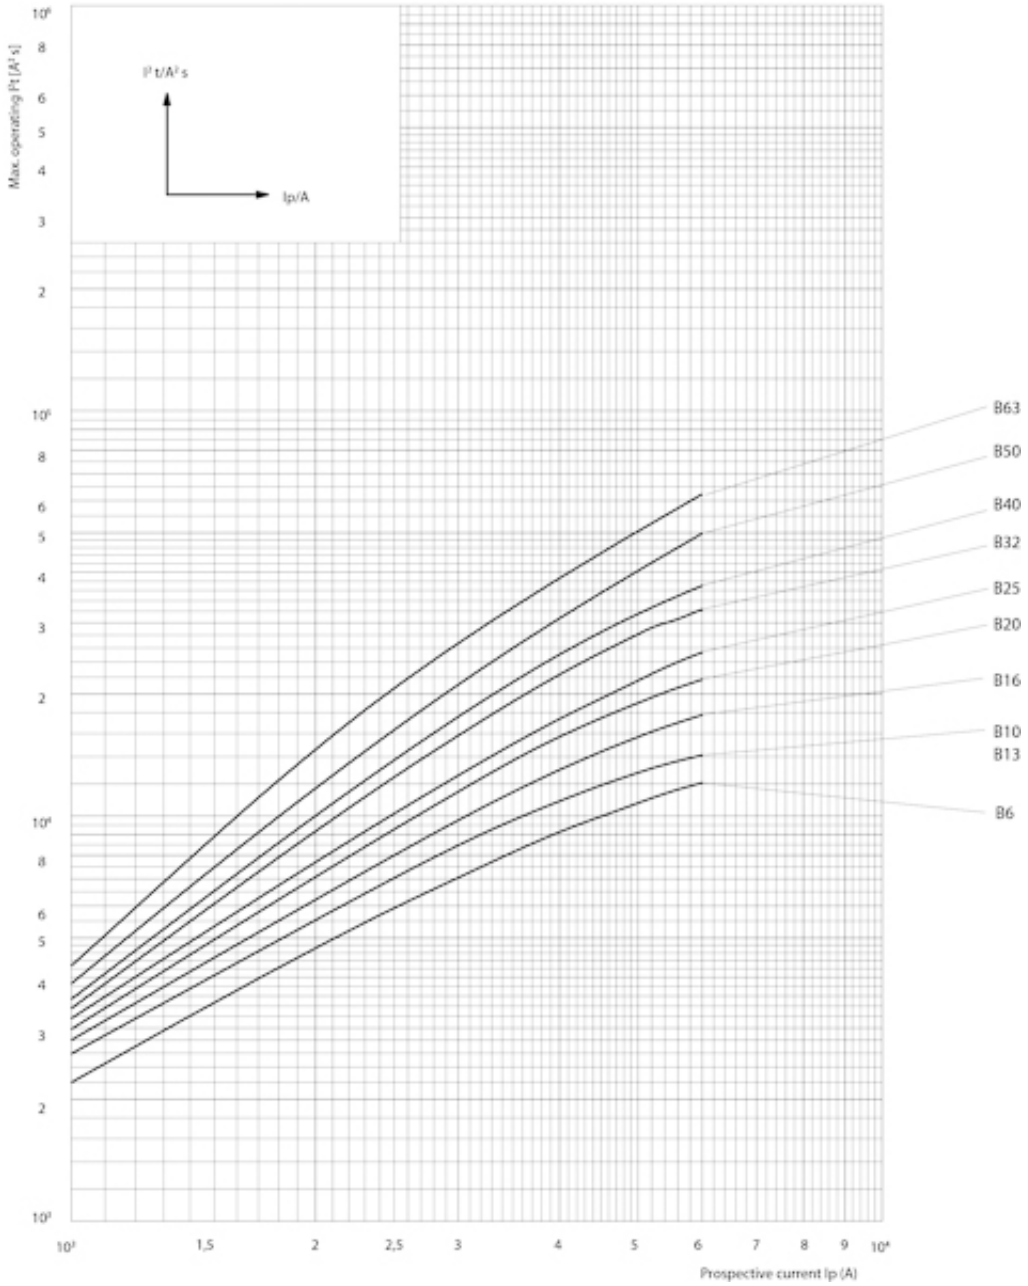

Caracteristici

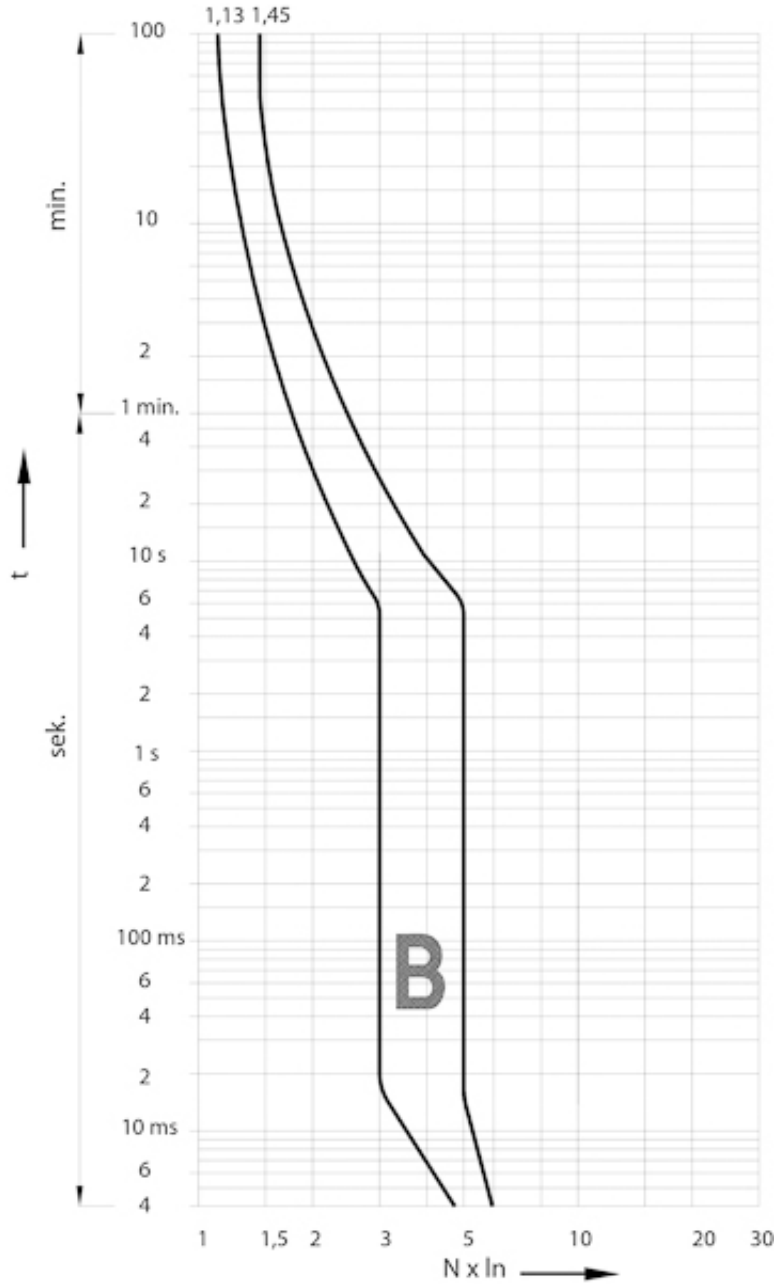

Desen cotat

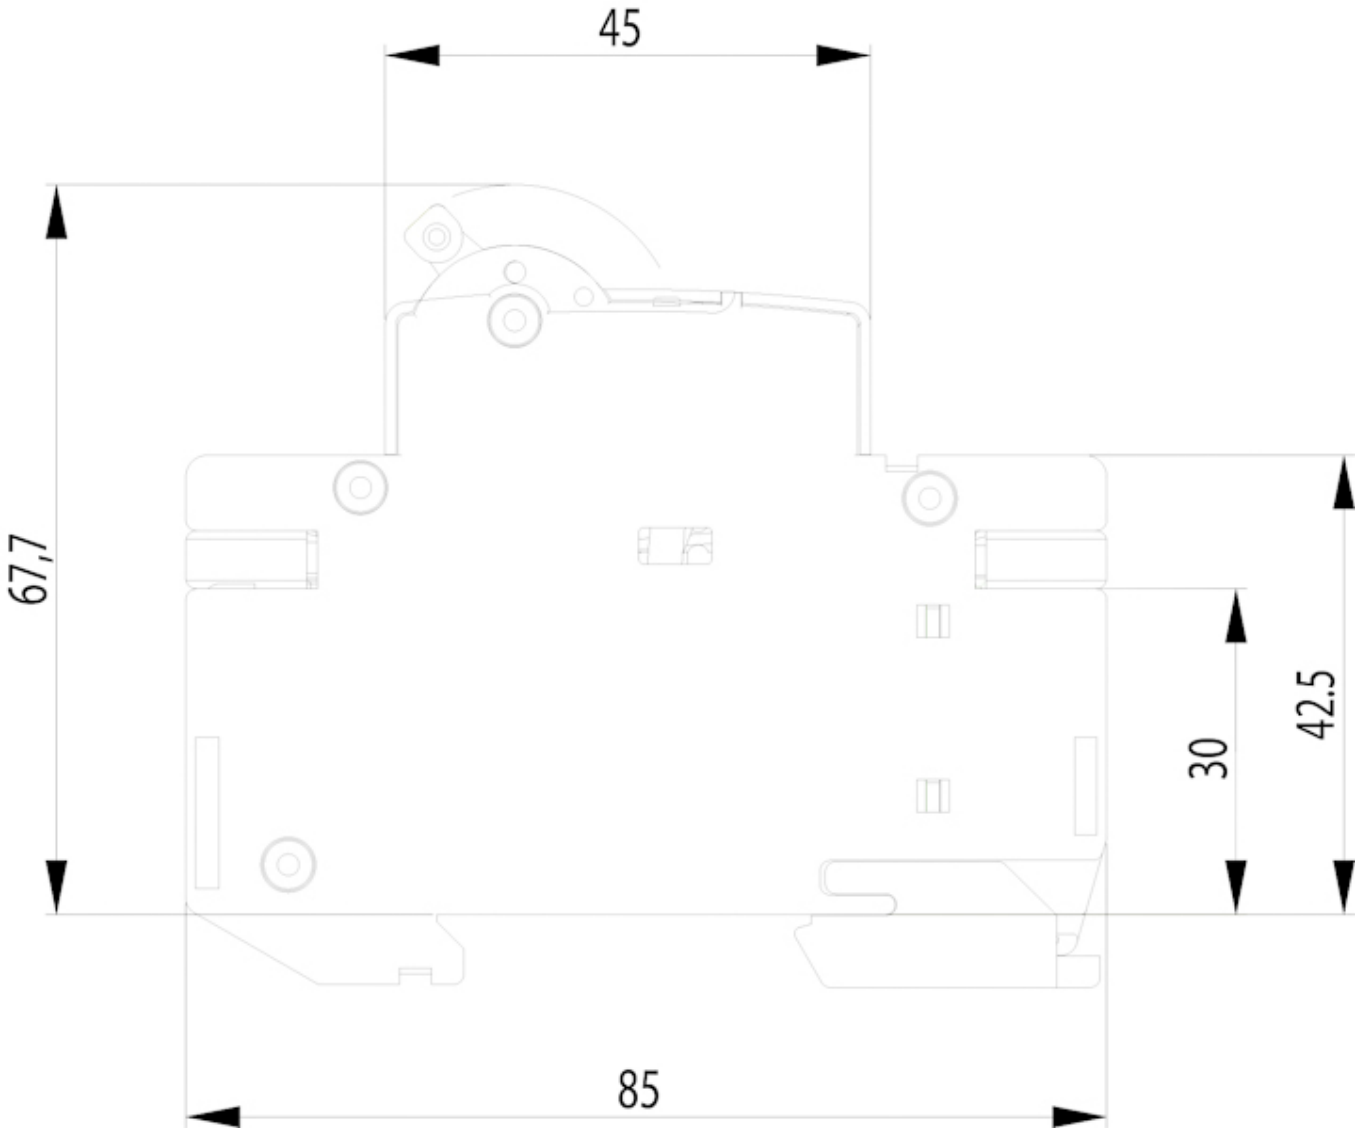

Simbol/Conexiune

1P

1P+N



2P



3P


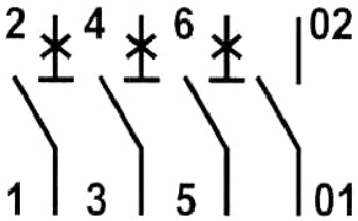
3P+N