## ETIM clasificare internationala

| | |
|---|---|
| Clasificare | EC000042 |
| Denumire clasă | Miniature circuit breaker (MCB) |
| Release characteristic | B |
| Number of poles (total) | 1 |
| Number of protected poles | 1 |
| Rated current | 4A |
| Rated voltage | 230/400V |
| Rated insulation voltage Ui | 500V |
| Rated impulse withstand voltage Uimp | 4kV |
| Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V | 6kA |
| Rated short-circuit breaking capacity Icn according to EN 60898 at 400 V | 6kA |
| Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 230 V | 6kA |
| Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V | 6kA |
| Voltage type | AC |
| Frequency | 50…60Hz |
| Current limiting class | 3 |
| Over voltage category | 3 |
| Pollution degree | 3 |
| Additional equipment possible | 1 |
| Width in number of modular spacings | 1 |
| Built-in depth | 68mm |
| Degree of protection (IP) | IP20 |
| Ambient temperature during operating | -25…55°C |
| Connectable conductor cross section multi-wired | 1…25mm² |
| Connectable conductor cross section solid-core | 1…25mm² |

# Caracteristicile energiei de topire

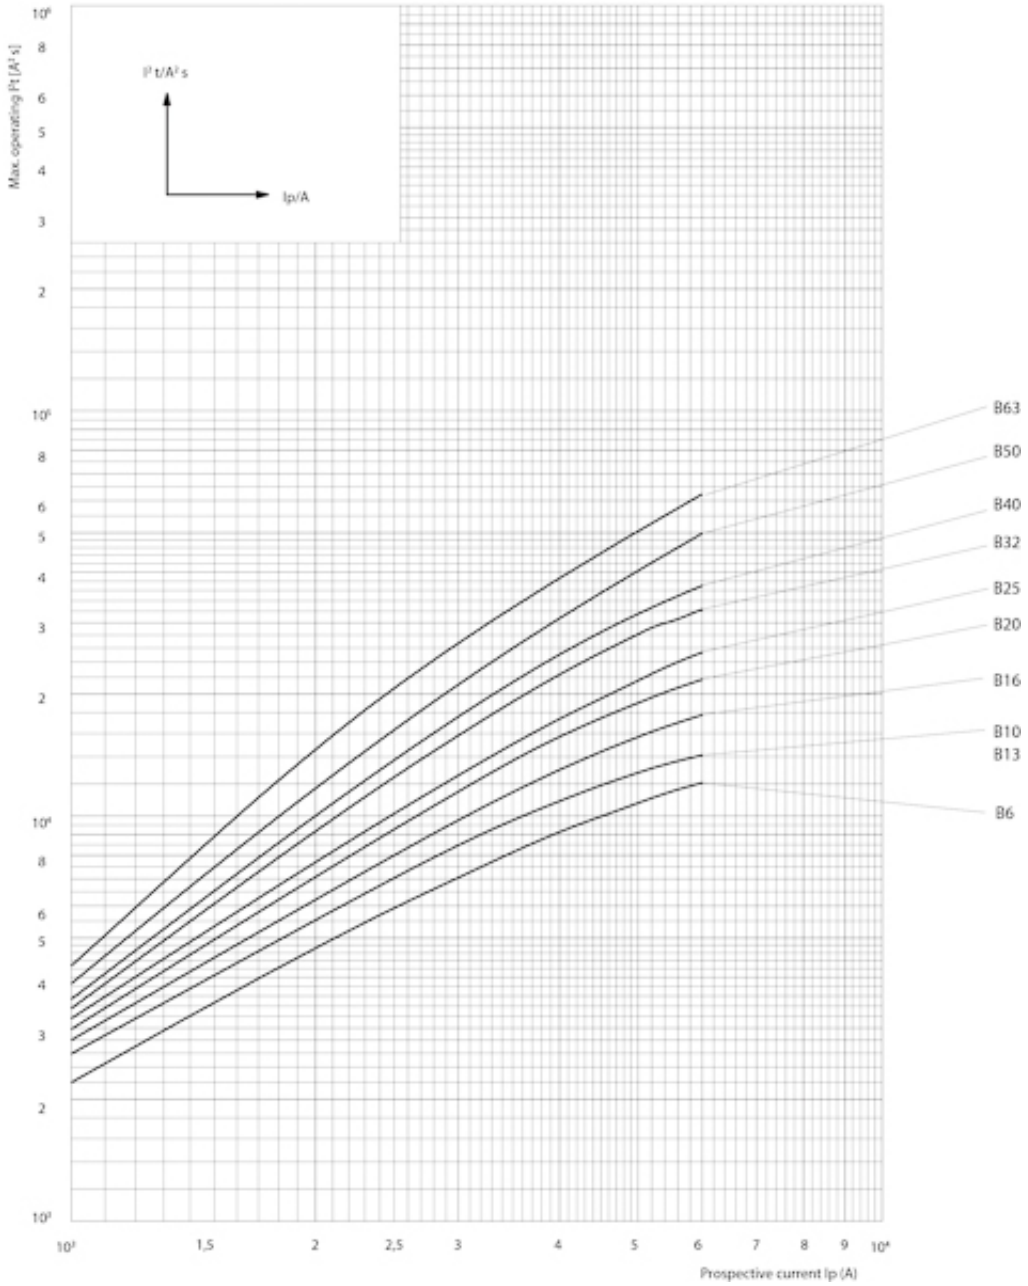

# Caracteristici

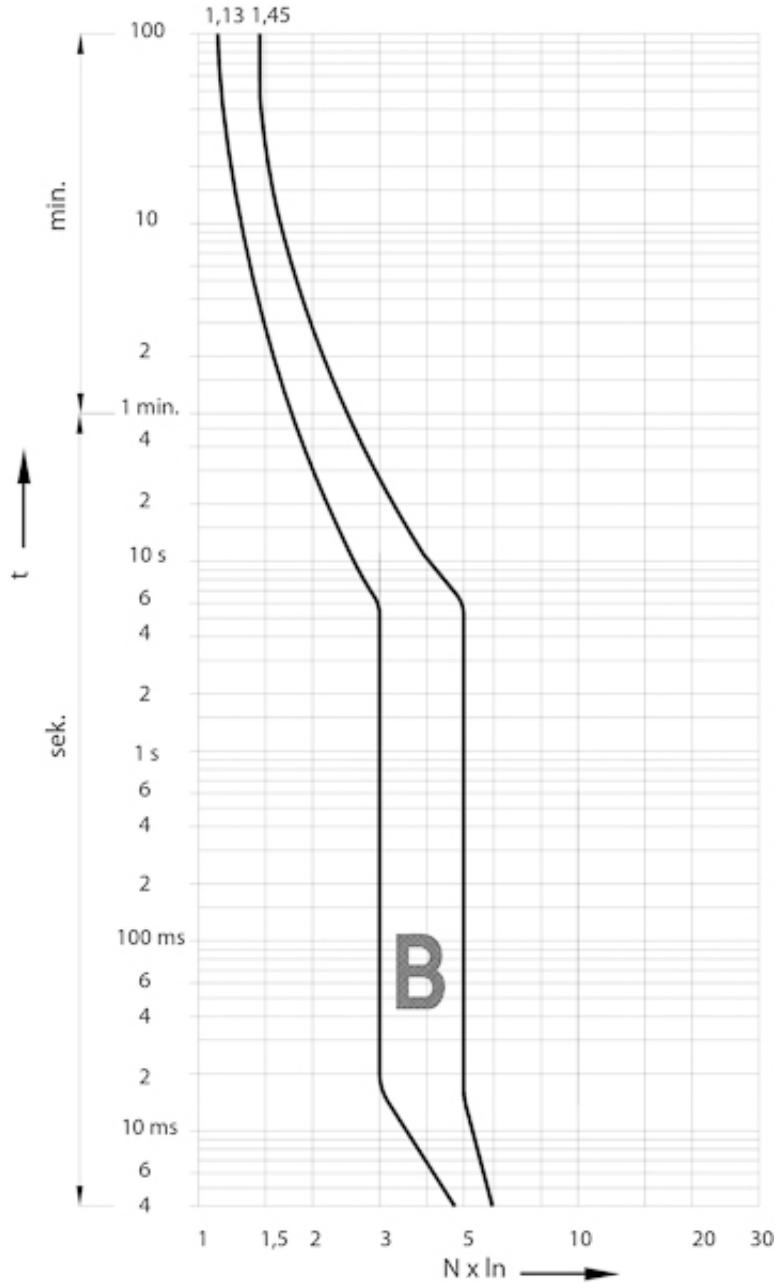

# Desen cotat

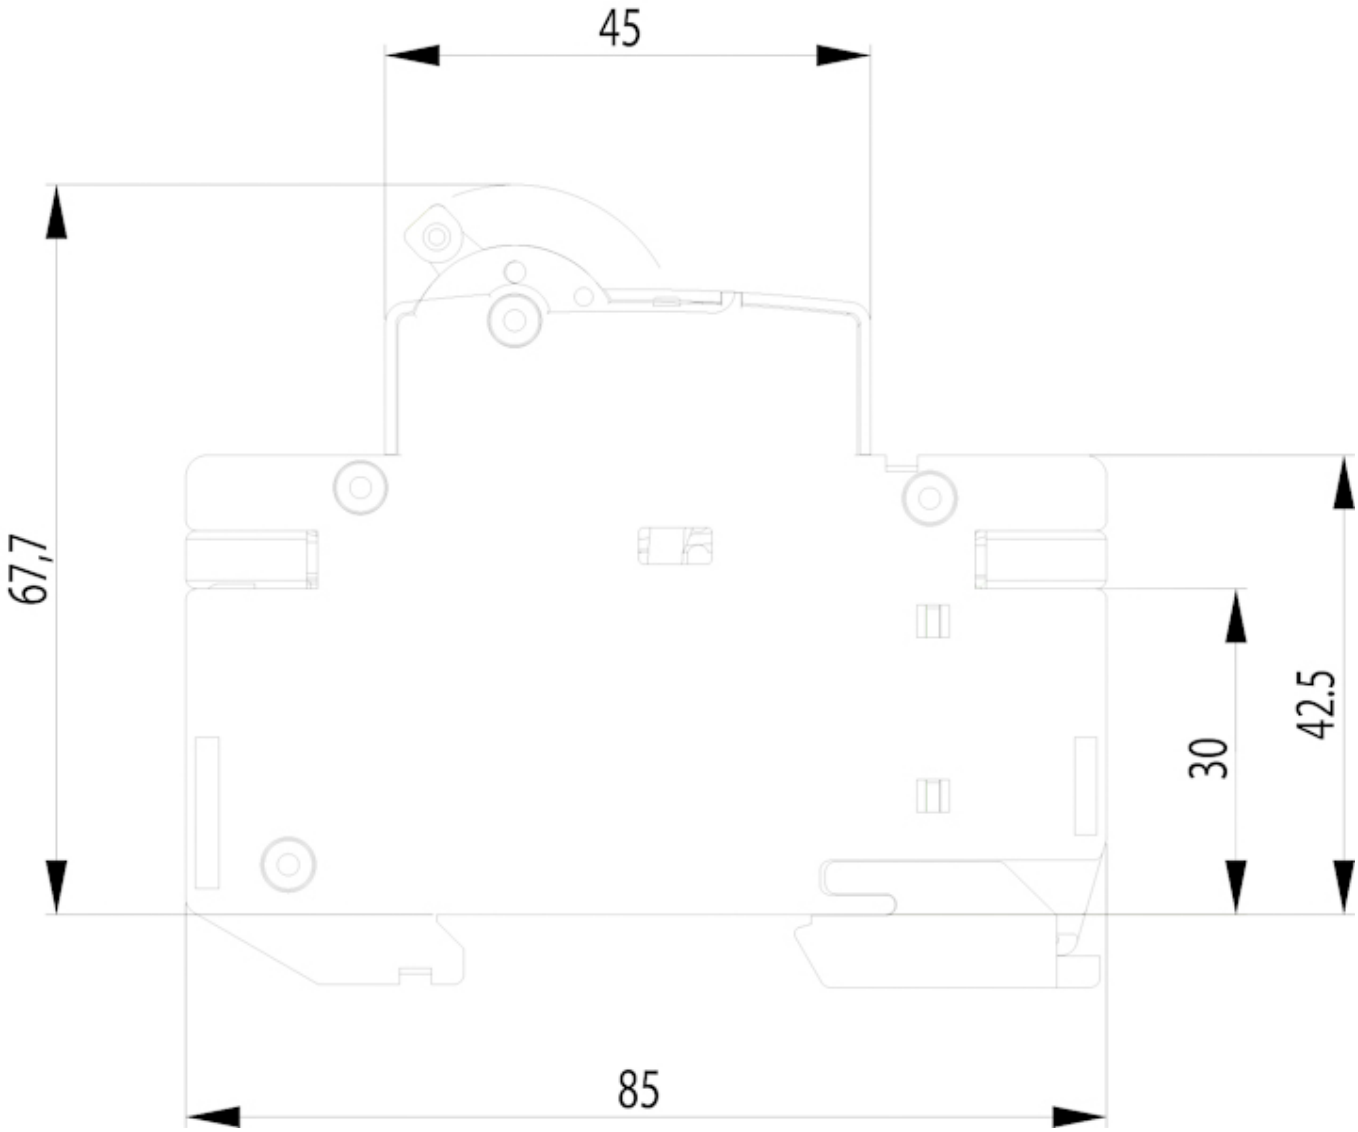

# Simbol/Conexiune

1P

1P+N




2P




3P



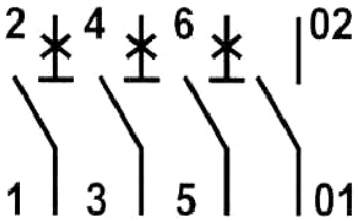
3P+N