

ETIMAT 6 1p B6



Specificatii

Cod ETI	002111512
Descriere	ETIMAT 6 1p B6
Denumire clasă	Înterupător de circuit
Funcție	MCB
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	B
Curent nominal (A)	6
Tensiunea nominală(V)	230/400
Număr de poli	1
Frecvență nominală (Hz)	50/60
Standarde	IEC/EN 60898-1, IEC 60947-2
Secțiune transversală nominală	1-25
Tipul voltajului	AC
Tensiunea nominală de rezistență Uimp (kV)	6

[Pagina de produse online](#) 

Alta documentatie



[Catalog caracteristici tehnice](#)

[Certificate](#)

[Model 3D](#)

[Manual de instructiuni](#)


[Declaratie CE](#)

[Eplan mușchi](#)

ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	1
Number of protected poles	1
Rated current	6A
Rated voltage	230/400V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	4kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	6kA
Voltage type	Other
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	
Over voltage category	3
Pollution degree	3
Additional equipment possible	1
Width in number of modular spacings	1
Built-in depth	68mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-25...55°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Caracteristicile energiei de topire

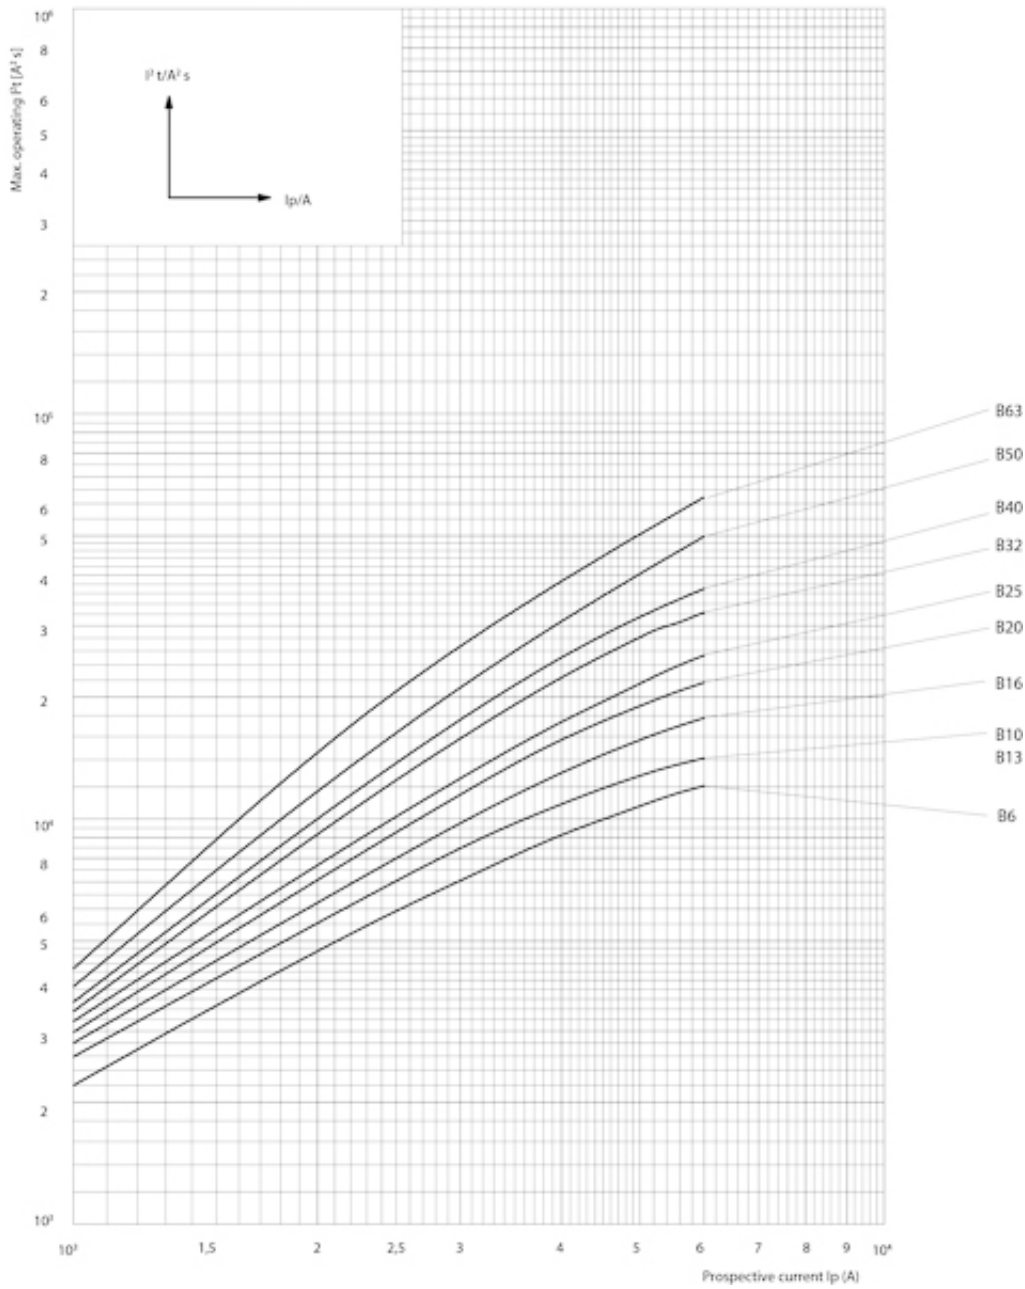

Caracteristici



Desen cotat




Simbol/Conexiune

1P



1P+N



2P



3P



3P+N

