

## ETIMAT 6 1p+N B6



### Specificatii

Cod ETI	002112512
Descriere	ETIMAT 6 1p+N B6
Denumire clasă	Întreprător de circuit
Func ie	MCB
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	B
Curent nominal (A)	6
Tensiunea nominală(V)	230
Număr de poli	1+N
Frecven ă nominală (Hz)	50/60
Standarde	IEC/EN 60898-1, IEC 60947-2
Sec iune transversală nominală	1-25
Tipul voltajului	AC
Tensiunea nominala de rezistenta Uimp (kV)	6

[Pagina de produse online](#)

### Alta documentatie



[Catalog caracteristici tehnice](#)

[Certificate](#)

[Model 3D](#)

[Manual de instructiuni](#)

[Declaratie CE](#)

[Eplan mușchi](#)


## ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	2
Number of protected poles	1
Rated current	6A
Rated voltage	230V
Rated insulation voltage $U_i$	500V
Rated impulse withstand voltage $U_{imp}$	4kV
Rated short-circuit breaking capacity $I_{cn}$ according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity $I_{cn}$ according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity $I_{cu}$ according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity $I_{cu}$ according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	3
Additional equipment possible	1
Width in number of modular spacings	2
Built-in depth	68mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-25...55°C
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>
Connectable conductor cross section solid-core	1...25mm <sup>2</sup>

# Caracteristicile energiei de topire



# Caracteristici

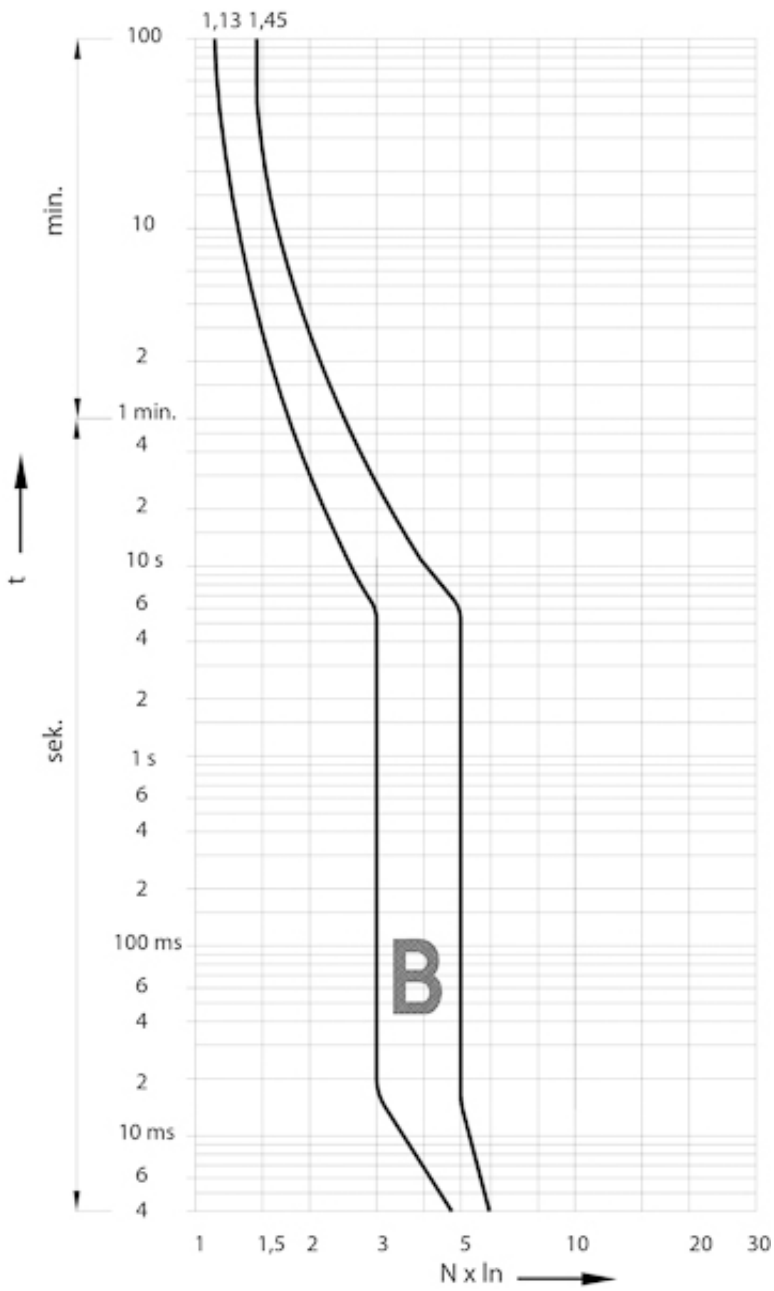

## Desen cotat




## Simbol/Conexiune


1P



1P+N



2P



3P



3P+N

