

ETIMAT 6 1p+N B16



Specificatii

Cod ETI	002112516
Descriere	ETIMAT 6 1p+N B16
Denumire clasă	Întrepruator de circuit
Funcie	MCB
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	B
Curent nominal (A)	16
Tensiunea nominală(V)	230
Număr de poli	1+N
Frecvență nominală (Hz)	50/60
Standarde	IEC/EN 60898-1, IEC 60947-2
Seciune transversală nominală	1-25
Tipul voltajului	AC
Tensiunea nominala de rezistenta Uimp (kV)	6

Pagina de produse online

Alta documentatie



Catalog caracteristici tehnice

Certificate

Model 3D

Manual de instructiuni


Declaratie CE

Eplan mușchi

ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	2
Number of protected poles	1
Rated current	16A
Rated voltage	230V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	4kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	6kA
Voltage type	Other
Frequency	50...60Hz
Current limiting class	3
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	3
Additional equipment possible	1
Width in number of modular spacings	2
Built-in depth	68mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-25...55°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Caracteristicile energiei de topire

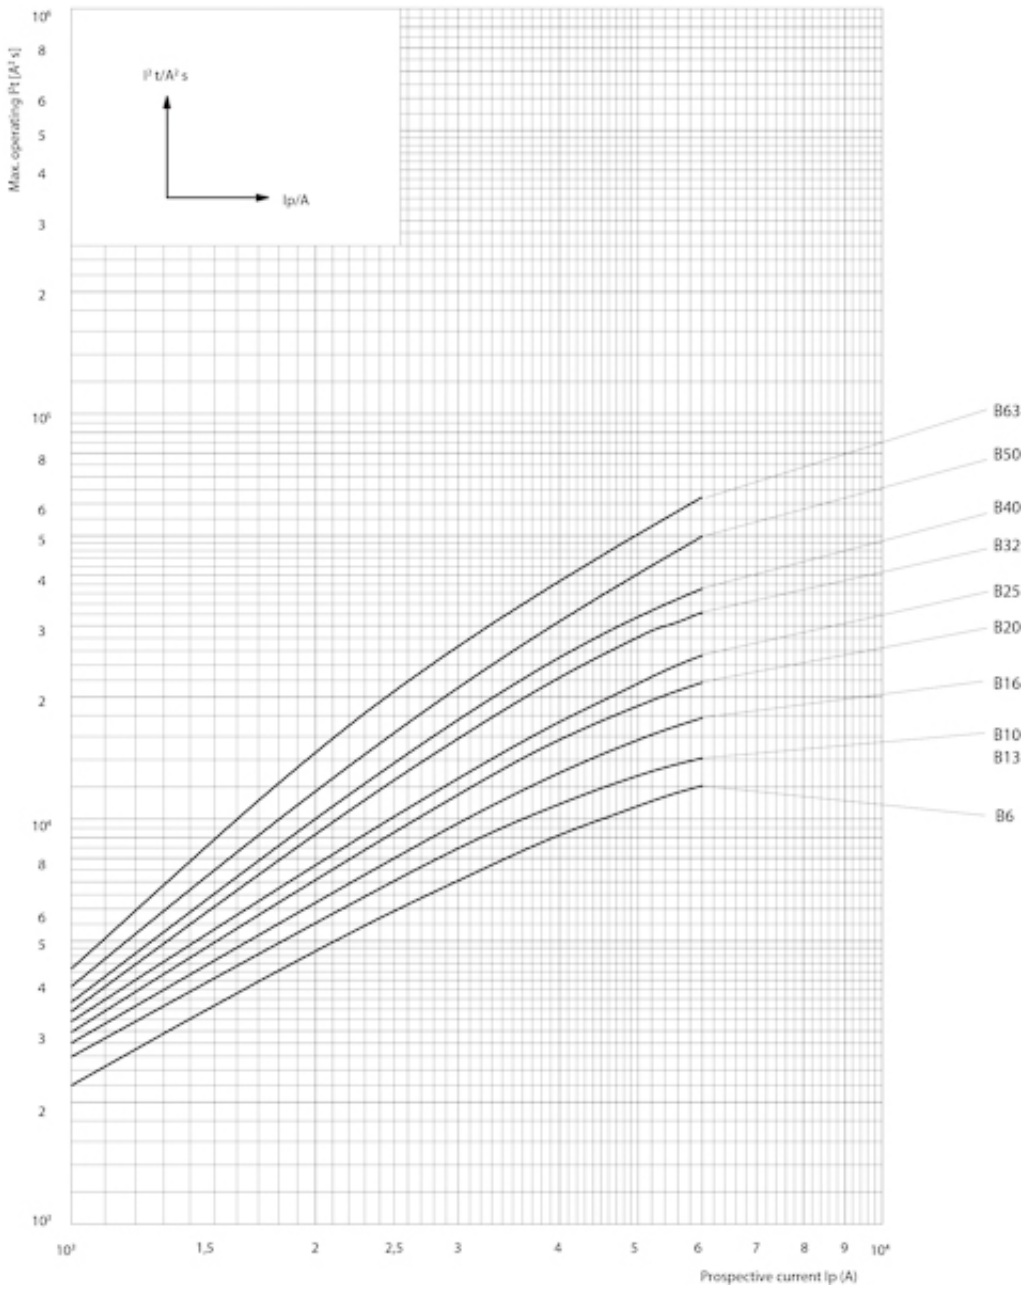

Caracteristici



Desen cotat



Simbol/Conexiune


1P



1P+N



2P



3P



3P+N

