

ETIMAT 6 2p C25



Specificatii

Cod ETI	002143518
Descriere	ETIMAT 6 2p C25
Denumire clasă	Înterupător de circuit
Func ie	MCB
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	C
Curent nominal (A)	25
Tensiunea nominală(V)	400
Număr de poli	2
Frecven ă nominală (Hz)	50/60
Standarde	IEC/EN 60898-1, IEC 60947-2
Sec iune transversală nominală	1-25
Tipul voltajului	AC
Tensiunea nominala de rezistenta Uimp (kV)	6

[Pagina de produse online](#) 

Alta documentatie



[Catalog caracteristici tehnice](#)

[Certificate](#)

[Model 3D](#)

[Manual de instructiuni](#)


[Declaratie CE](#)

[Eplan mușchi](#)


ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	C
Number of poles (total)	2
Number of protected poles	2
Rated current	25A
Rated voltage	400V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	4kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	
Over voltage category	3
Pollution degree	3
Additional equipment possible	1
Width in number of modular spacings	2
Built-in depth	68mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-25...55°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Caracteristicile energiei de topire

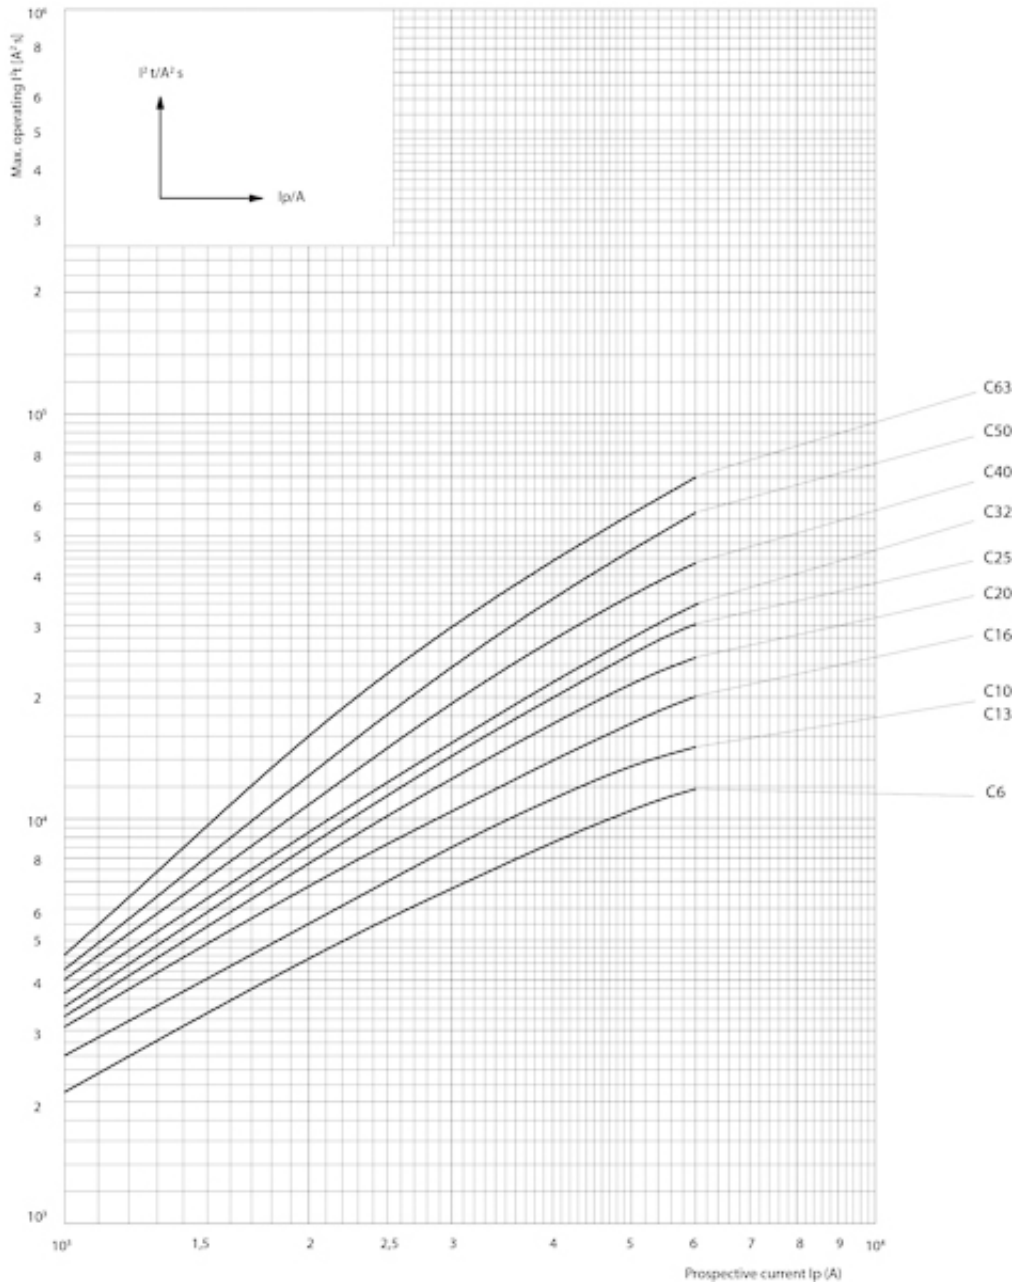

Caracteristici

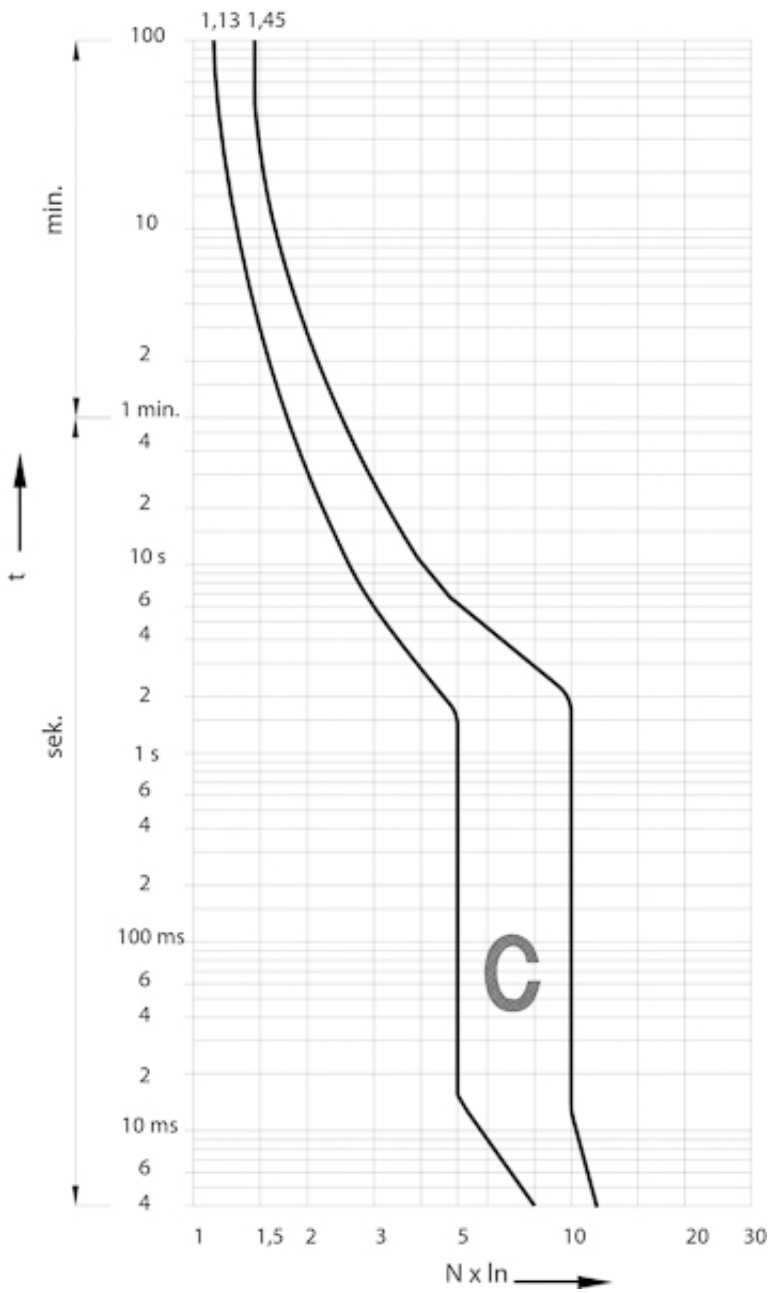

Desen cotat




Simbol/Conexiune

1P



1P+N



2P



3P



3P+N

