# KZS-2M A B20/0.3

## Specificatii

| | |
|---|---|
| Cod ETI | 002173405 |
| Descriere | KZS-2M A B20/0.3 |
| Denumire clasă | Diferen ial RCBO |
| Capacitatea de rupere (kA) | 10 |
| Caracteristică de întrerupere | B |
| Curent nominal (A) | 20 |
| Tip | A |
| Curent de defect nominal (A) | 0.3 |
| Tip curent | A |
| Tensiunea nominală(V) | 240 |
| Număr de poli | 1+N |
| Frecven ă nominală (Hz) | 50/60 Hz |
| Standarde | IEC/EN 61009 |
| Sec iune transversală nominală | 1-25 |

Pagina de produse online

## Alta documentatie

Catalog caracteristici tehnice
Model 3D
Manual de instructiuni
Declaratie CE
Eplan mușchi

## ETIM clasificare internationala

| | |
|---|---|
| Clasificare | EC000905 |
| Denumire clasă | Earth leakage circuit breaker |
| Number of poles (total) | 2 |
| Number of protected poles | 1 |
| Rated voltage | 230V |
| Rated insulation voltage Ui | 500V |
| Rated current | 20A |
| Rated fault current | 0,3A |
| Leakage current type | A |
| Current limiting class | 3 |
| Rated short-circuit breaking capacity according to EN 61009 | 10kA |
| Voltage type | AC |
| Frequency | 50 Hz |
| Release characteristic | B |
| Concurrently switching neutral conductor | 1 |
| Width in number of modular spacings | 2 |
| Built-in depth | 69mm |
| Degree of protection (IP) | IP20 |
| Connectable conductor cross section solid-core | 1…25mm² |
| Connectable conductor cross section multi-wired | 1…25mm² |

# Desen cotat

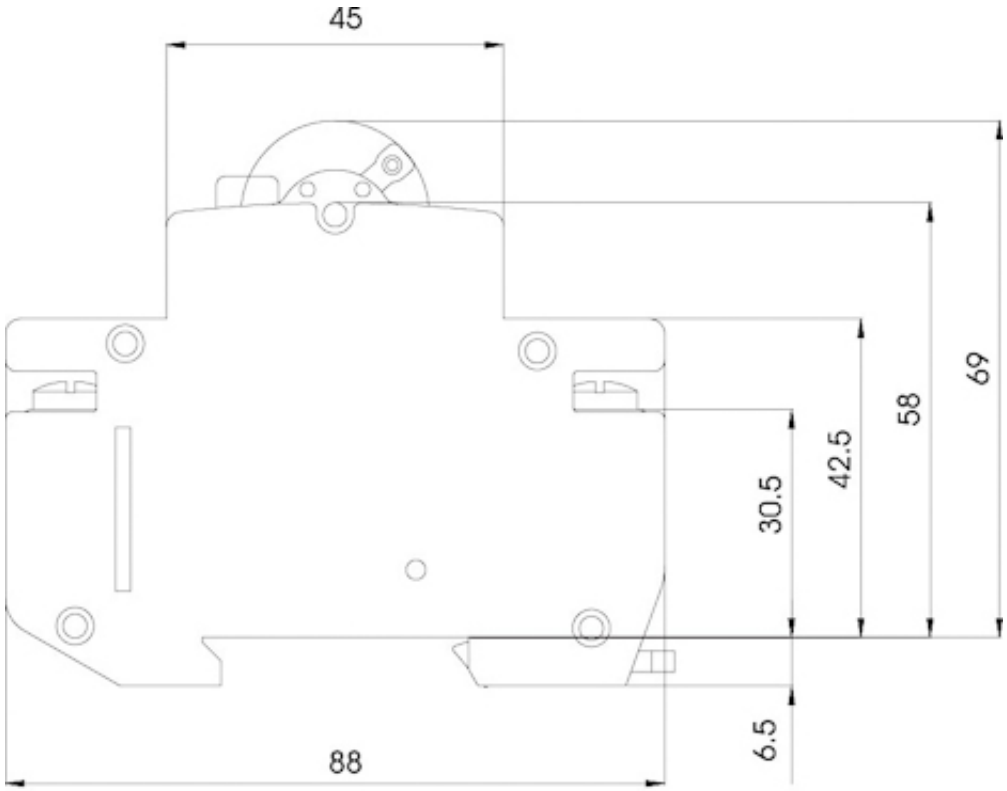


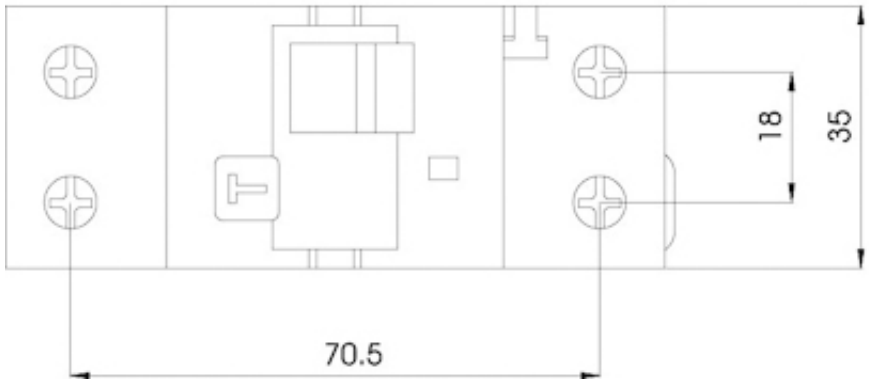

# Simbol/Conexiune