

## KZS-AFDD 3M2p A C10/0.03



### Specificatii

Cod ETI	002173872
Descriere	KZS-AFDD 3M2p A C10/0.03
Denumire clasă	Protectie defecte arc AFDD
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	C
Curent nominal (A)	10
Tip	A
Curent de defect nominal (A)	0.03
Tip curent	A
Tensiunea nominală(V)	240
Număr de poli	2
Frecvență nominală (Hz)	50Hz
Standarde	IEC/EN 61009-1, IEC/EN 62606
Seciune transversală nominală	1-25

[Pagina de produse online](#)

### Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)


[Declaratie CE](#)

[Eplan mușchi](#)


## ETIM clasificare internațională

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	2
Rated voltage	230V
Rated impulse withstand voltage Uimp	4kV
Rated current	10A
Rated fault current	0,03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Frequency	50 Hz
Release characteristic	C
Ambient temperature during operating	-25...40°C
Width in number of modular spacings	3
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm <sup>2</sup>
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>



## Caracteristicile energiei de topire

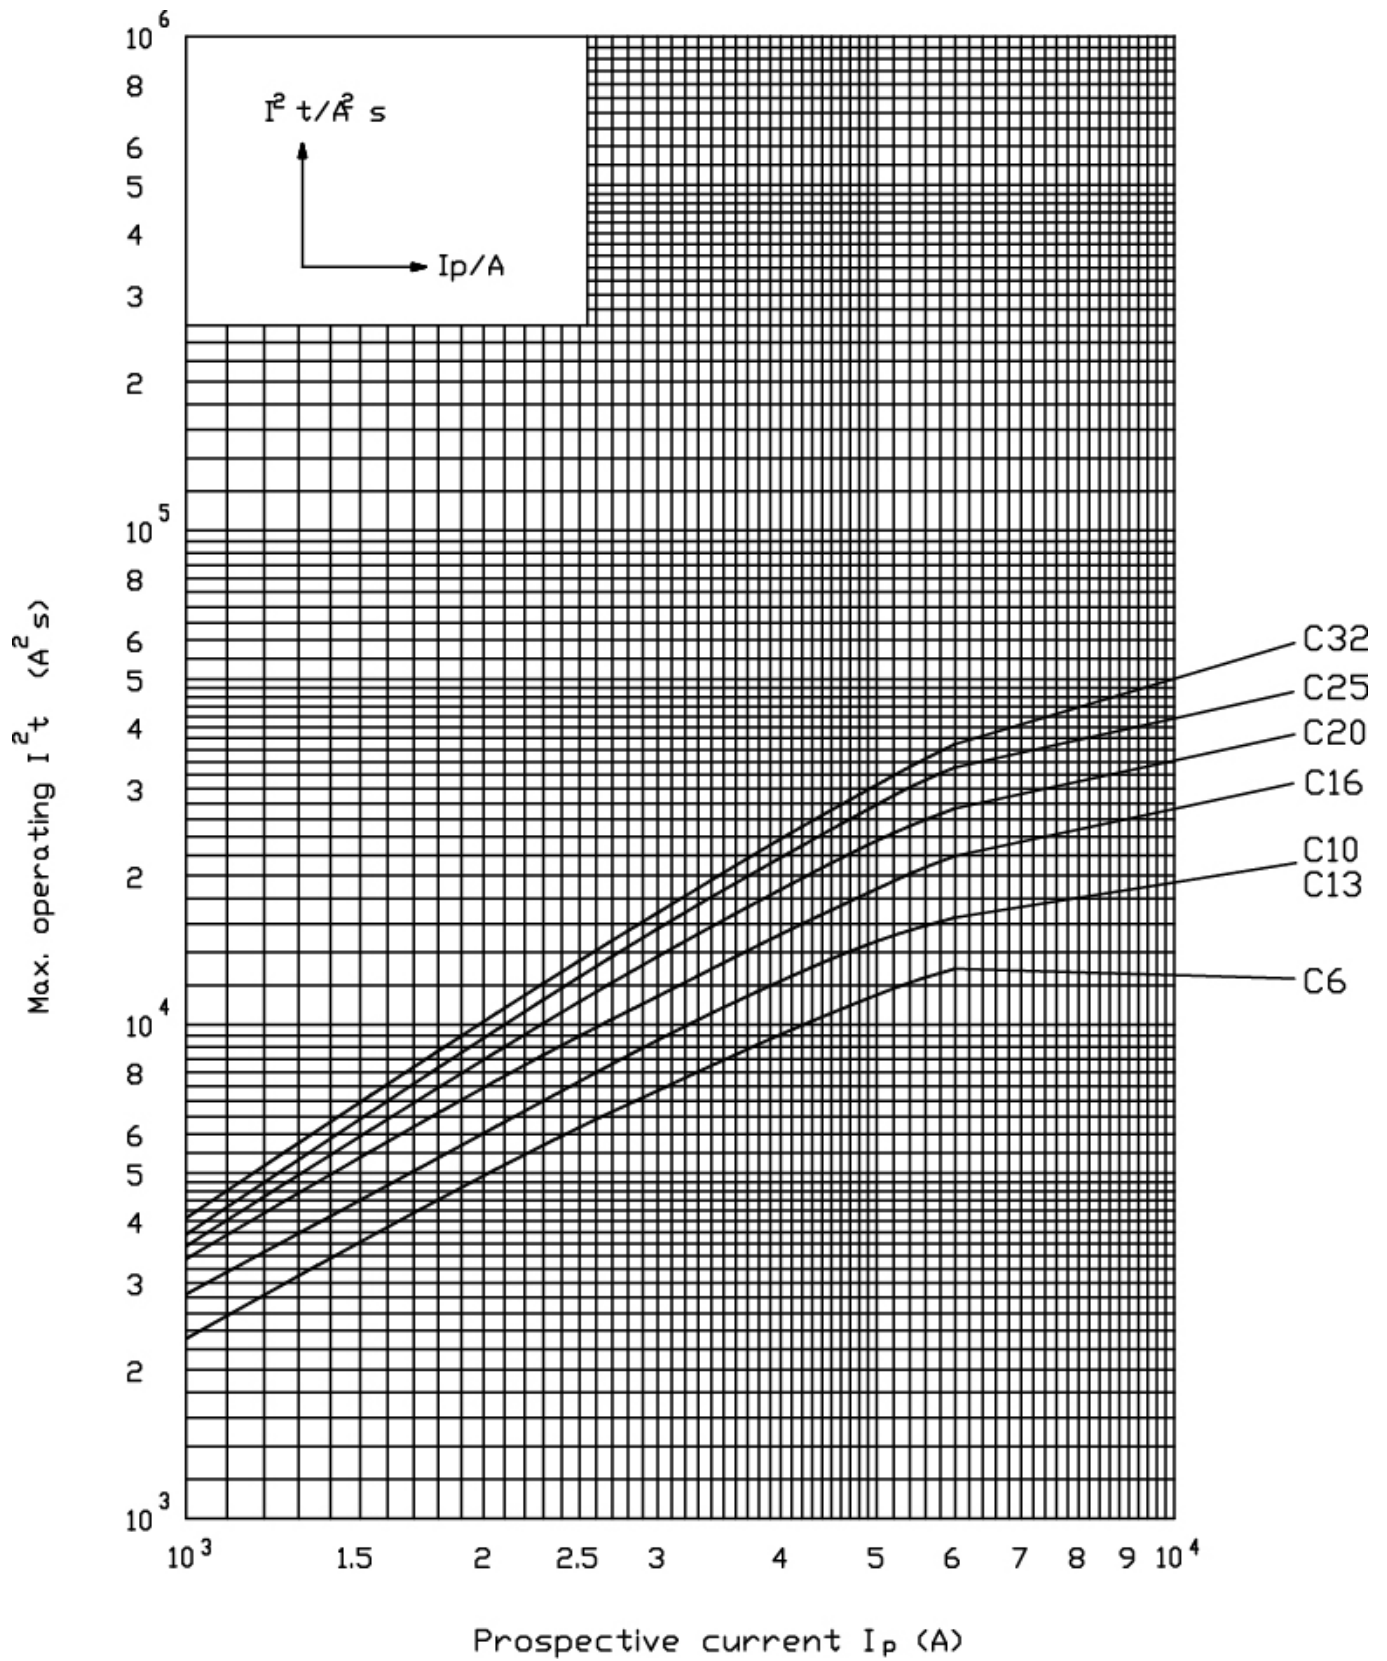

## Caracteristici

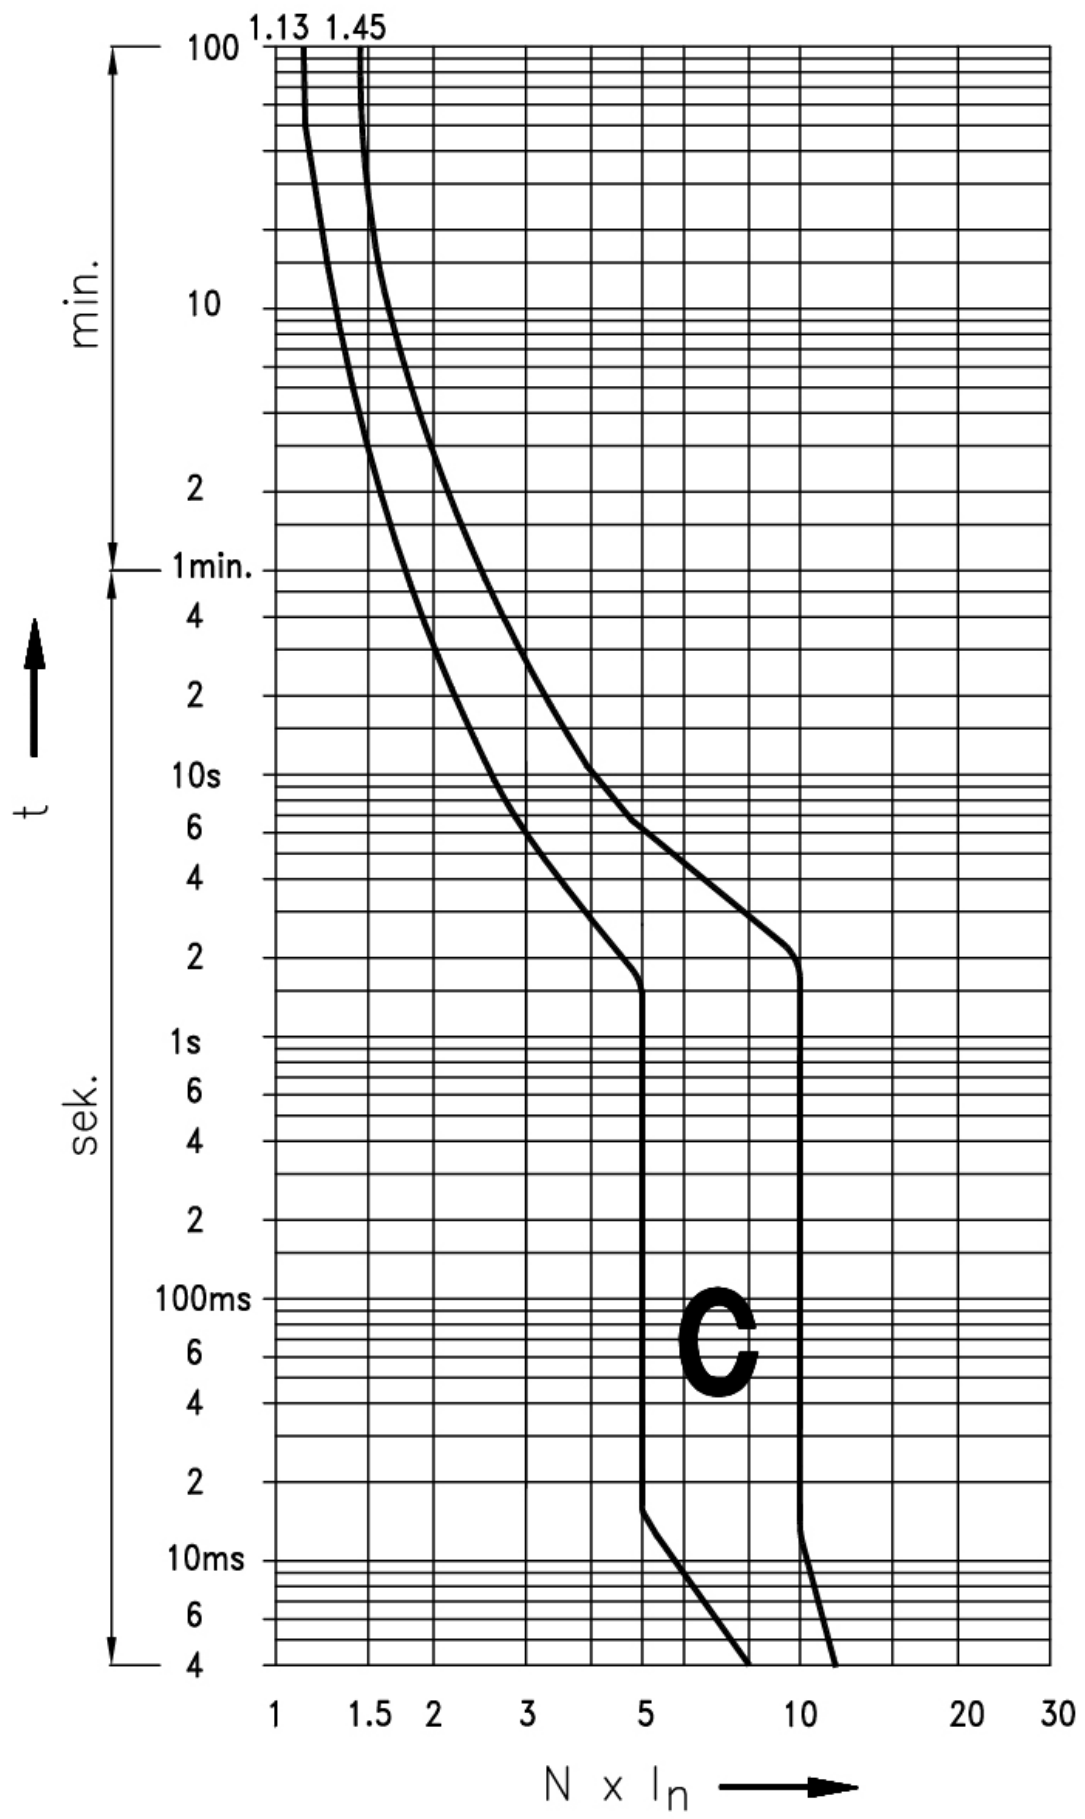

## Desen cotat

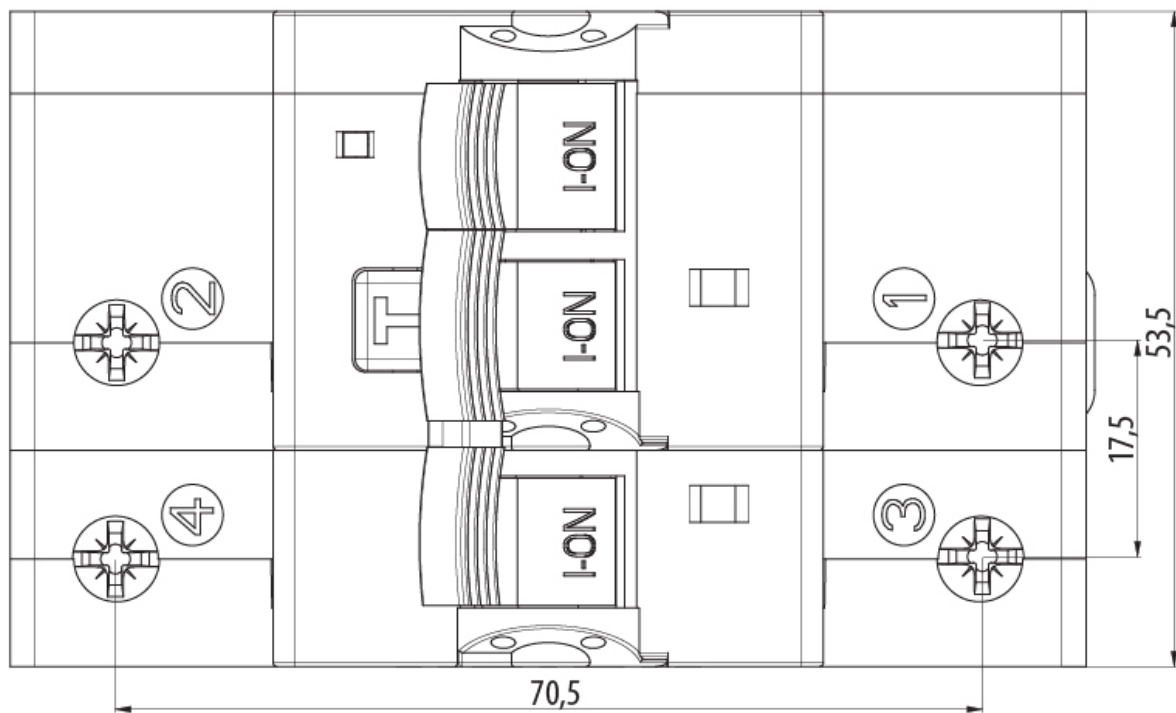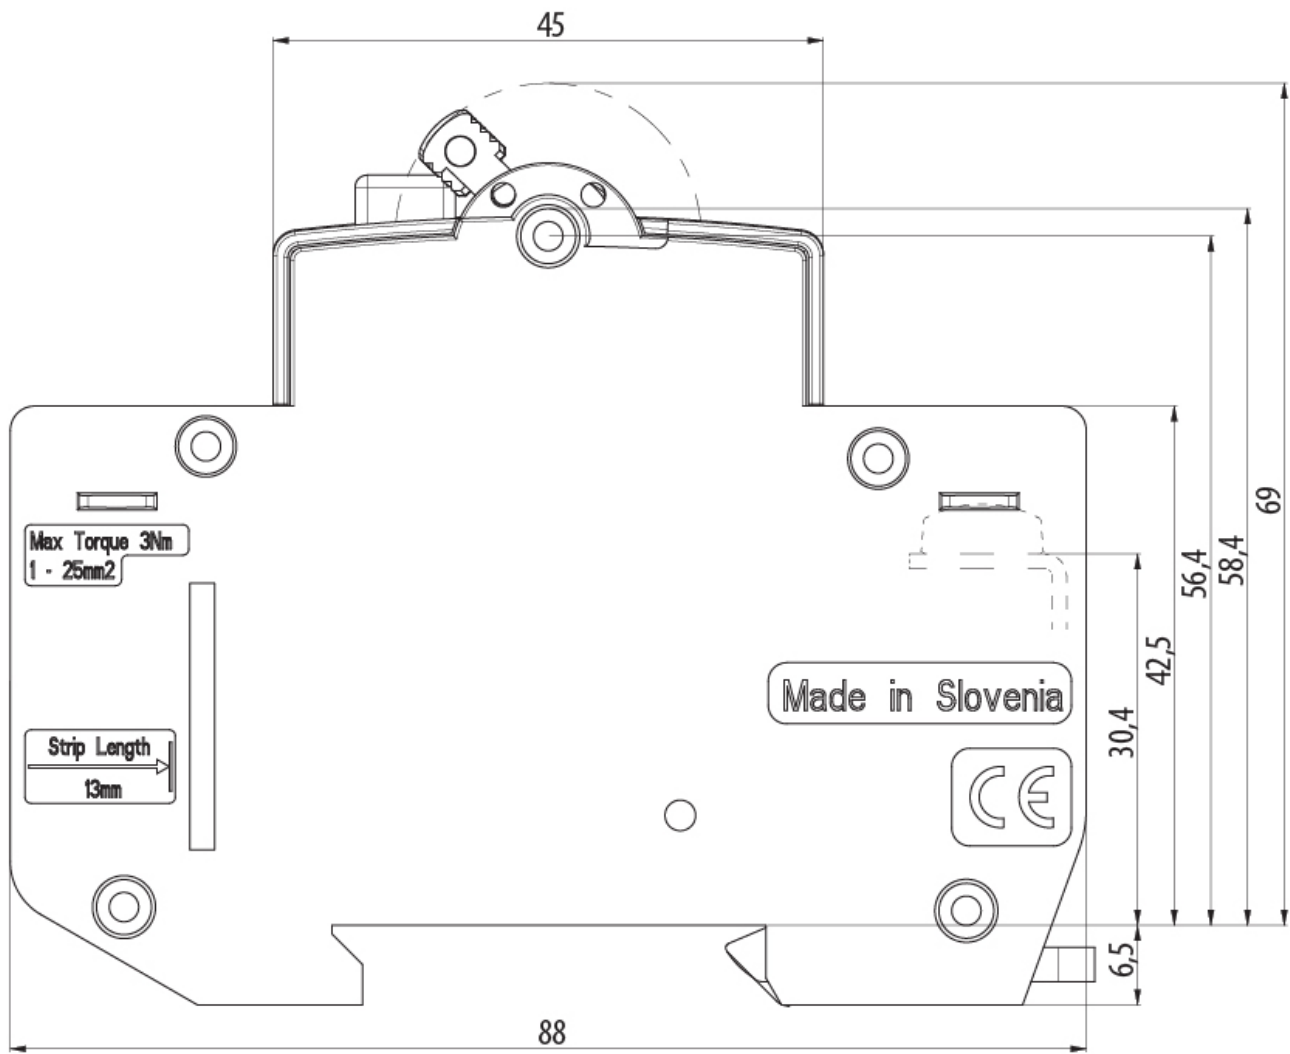



## Simbol/Conexiune

