KZS-4M 2p B B40/0.03

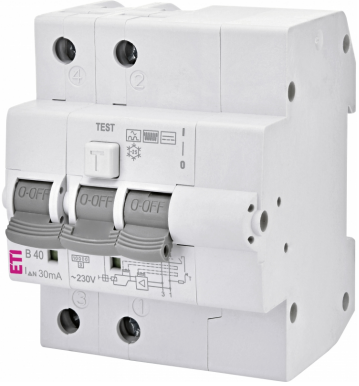

Specificatii

Cod ETI	002174518
Descriere	KZS-4M 2p B B40/0.03
Denumire clasă	Diferen ial RCBO
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	B
Curent nominal (A)	40
Tip	B
Curent de defect nominal (A)	0.03
Tip curent	B
Tensiunea nominală(V)	240
Număr de poli	2
Frecven ă nominală (Hz)	50/60 Hz
Standarde	IEC/EN 61009, IEC/EN 62423
Sec iune transversală nominală	1-25

Pagina de produse online

Alta documentatie

Catalog caracteristici tehnice
Certificate
Model 3D
Declaratie CE
Eplan mușchi

ETIM clasificare internationala

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	2
Rated voltage	230V
Rated current	40A
Rated fault current	0,03A
Leakage current type	B
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Rated short-circuit breaking capacity according to IEC 60947-2	10kA
Surge current capacity	3kA
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	B
Concurrently switching neutral conductor	1
Width in number of modular spacings	4
Built-in depth	69mm
Anti-nuisance tripping version	1
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm²
Connectable conductor cross section multi-wired	1...25mm²

Desen cotat