


KZS-4M 2p B C10/0.03

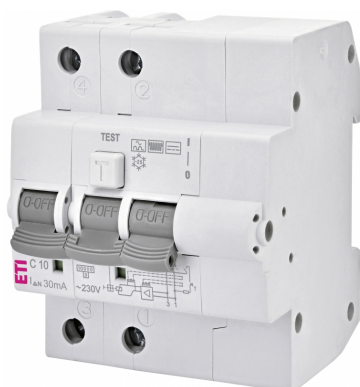

Specificatii

| | |
|-------------------------------|----------------------------|
| Cod ETI | 002174532 |
| Descriere | KZS-4M 2p B C10/0.03 |
| Denumire clasă | Diferențial RCBO |
| Capacitatea de rupere (kA) | 10 |
| Caracteristică de întrerupere | C |
| Curent nominal (A) | 10 |
| Tip | B |
| Curent de defect nominal (A) | 0.03 |
| Tip curent | B |
| Tensiunea nominală(V) | 240 |
| Număr de poli | 2 |
| Frecvență nominală (Hz) | 50/60 Hz |
| Standarde | IEC/EN 61009, IEC/EN 62423 |
| Seciune transversală nominală | 1-25 |

[Pagina de produse online](#) 

Alta documentatie



[Catalog caracteristici tehnice](#)

[CertIFICATE](#)

[Model 3D](#)

[Declaratie CE](#)

[Eplan mușchi](#)

ETIM clasificare internațională

| | |
|--|-------------------------------|
| Clasificare | EC000905 |
| Denumire clasă | Earth leakage circuit breaker |
| Number of poles (total) | 2 |
| Number of protected poles | 2 |
| Rated voltage | 230V |
| Rated current | 10A |
| Rated fault current | 0,03A |
| Leakage current type | B |
| Current limiting class | 3 |
| Rated short-circuit breaking capacity according to EN 61009 | 10kA |
| Rated short-circuit breaking capacity according to IEC 60947-2 | 10kA |
| Surge current capacity | 3kA |
| Voltage type | AC |
| Frequency | 50/60 Hz |
| Release characteristic | C |
| Concurrently switching neutral conductor | 1 |
| Width in number of modular spacings | 4 |
| Built-in depth | 69mm |
| Anti- nuisance tripping version | 1 |
| Degree of protection (IP) | IP20 |
| Connectable conductor cross section solid-core | 1...25mm ² |
| Connectable conductor cross section multi-wired | 1...25mm ² |

Desen cotat

