


KZS-4M 2p B C16/0.03

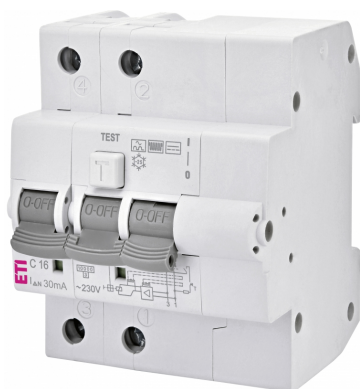

Specificatii

Cod ETI	002174534
Descriere	KZS-4M 2p B C16/0.03
Denumire clasă	Diferențial RCBO
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	C
Curent nominal (A)	16
Tip	B
Curent de defect nominal (A)	0.03
Tip curent	B
Tensiunea nominală(V)	240
Număr de poli	2
Frecvență nominală (Hz)	50/60 Hz
Standarde	IEC/EN 61009, IEC/EN 62423
Seciune transversală nominală	1-25

[Pagina de produse online](#) 

Alta documentatie



[Catalog caracteristici tehnice](#)

[CertIFICATE](#)

[Model 3D](#)

[Declaratie CE](#)

[Eplan mușchi](#)

ETIM clasificare internationala

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	2
Rated voltage	230V
Rated current	16A
Rated fault current	0,03A
Leakage current type	B
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Rated short-circuit breaking capacity according to IEC 60947-2	10kA
Surge current capacity	3kA
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	C
Concurrently switching neutral conductor	1
Width in number of modular spacings	4
Built-in depth	69mm
Anti-nuisance tripping version	1
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm ²
Connectable conductor cross section multi-wired	1...25mm ²

Desen cotat

