


## KZS-4M 2p B B40/0.3

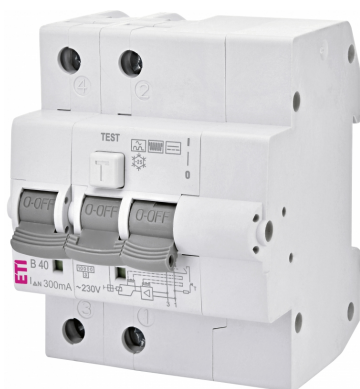

### Specificatii

Cod ETI	002174818
Descriere	KZS-4M 2p B B40/0.3
Denumire clasă	Diferențial RCBO
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	B
Curent nominal (A)	40
Tip	B
Curent de defect nominal (A)	0.3
Tip curent	B
Tensiunea nominală(V)	240
Număr de poli	2
Frecvență nominală (Hz)	50/60 Hz
Standarde	IEC/EN 61009, IEC/EN 62423
Seciune transversală nominală	1-25

Pagina de produse online [🔗](#)

### Alta documentatie



Catalog caracteristici tehnice

Certificate

Model 3D

Declaratie CE

Eplan mușchi

## ETIM clasificare internațională

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	2
Rated voltage	230V
Rated current	40A
Rated fault current	0,3A
Leakage current type	B
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Rated short-circuit breaking capacity according to IEC 60947-2	10kA
Surge current capacity	3kA
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	B
Concurrently switching neutral conductor	1
Width in number of modular spacings	4
Built-in depth	69mm
Anti-nuisance tripping version	1
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm <sup>2</sup>
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>

## Desen cotat

