

# KZS-1M-UNI 1p+N A C16/0.01

## Specificatii

Cod ETI	002176014
Descriere	KZS-1M-UNI 1p+N A C16/0.01
Denumire clasă	Diferențial RCBO
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	C
Curent nominal (A)	16
Tip	A
Curent de defect nominal (A)	0.01
Tip curent	A
Tensiunea nominală(V)	240
Număr de poli	1+N
Frecvență nominală (Hz)	50/60
Standarde	EN/IEC 61009-1
Secțiune transversală nominală	1...10

[Pagina de produse online](#)

## Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)

[Declaratie CE](#)


[Eplan mușchi](#)



## ETIM clasificare internațională

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Rated voltage	240V
Rated insulation voltage $U_i$	250V
Rated impulse withstand voltage $U_{imp}$	4kV
Rated current	16A
Rated fault current	0,01A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	6kA
Rated short-circuit breaking capacity according to IEC 60947-2	6kA
Rated short-circuit breaking capacity $I_{cn}$ according to EN 61009-1	6kA
Disconnection characteristic	Undelayed
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	C
Concurrently switching neutral conductor	1
With interlocking device	
Over voltage category	3
Pollution degree	2
Ambient temperature during operating	-35...40°C
Width in number of modular spacings	1
Built-in depth	70mm
Anti-nuisance tripping version	
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...10mm <sup>2</sup>
Connectable conductor cross section multi-wired	1...10mm <sup>2</sup>

## Caracteristici

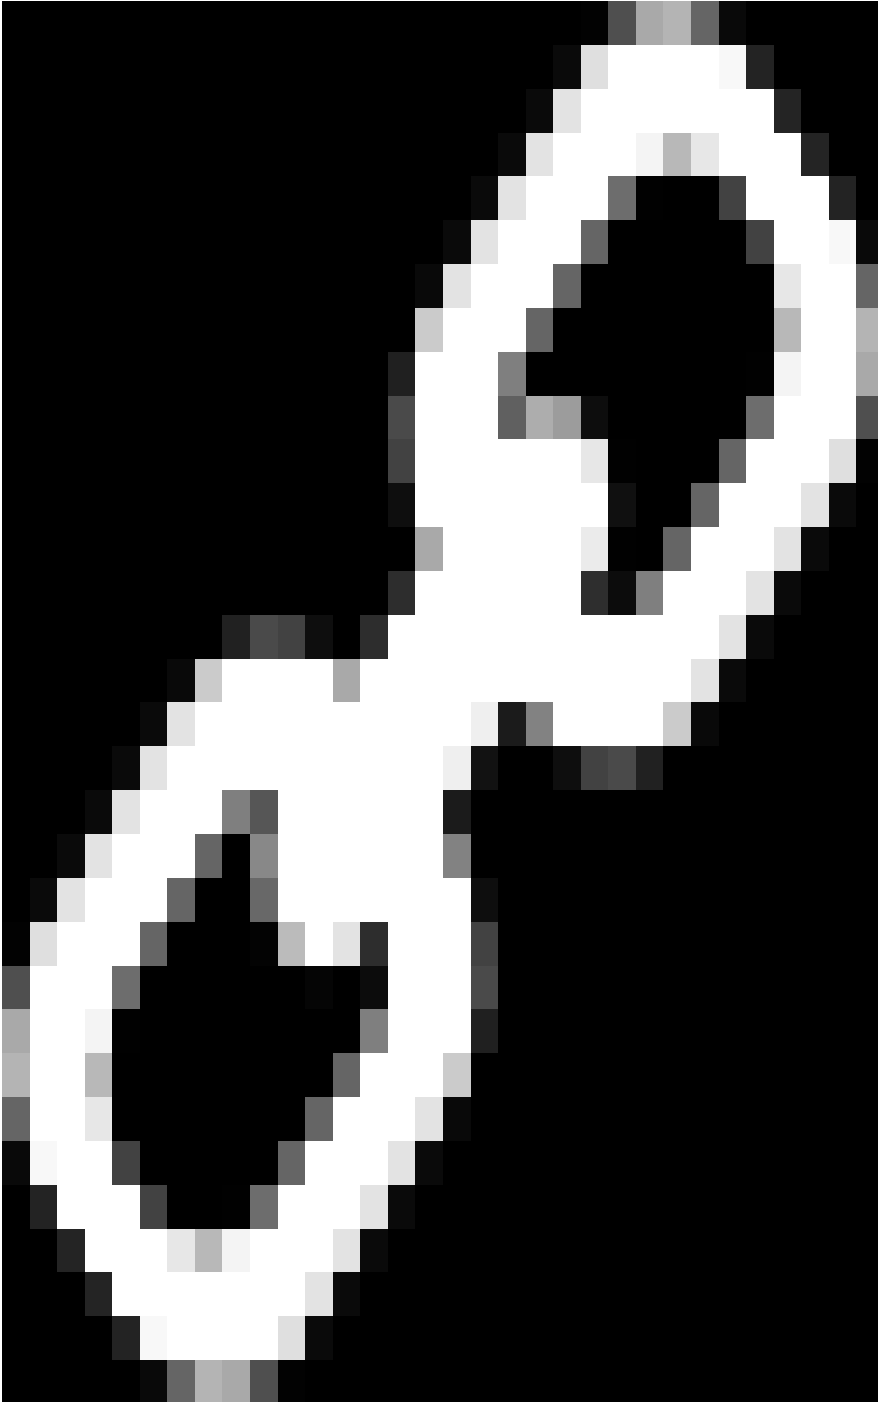

## Desen cotat

## Simbol/Conexiune