


R 25-11 24V

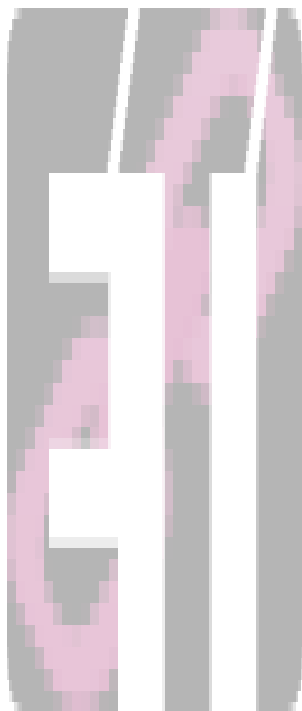

Specificatii

Cod ETI	002463503
Descriere	R 25-11 24V
Denumire clasă	Contactator modular
Func ie	Contactator modular
Tip	AC
Mărime	2p, 1-module
Număr de contacte NC	1
Frecven ă nominală (Hz)	50/60
Număr contacte NO	1
Curent nominal la AC-1/AC-7 (A)	25
Tensiunea nominala (V AC)	440V
Tensiunea de control Uc (V AC)	24V

[Pagina de produse online](#) 

Alta documentatie



[Model 3D](#)

[Declaratie CE](#)

[Eplan mușchi](#)

[Catalog caracteristici tehnice](#)

ETIM clasificare internationala

Clasificare	EC001653
Denumire clasă	Installation contactor for distribution board
Rated operating voltage	230...400V
Rated operation current	25A
Rated excitation voltage	24...24V
Voltage type (operating voltage)	AC
Voltage type (excitation voltage)	AC
Number of contacts as normally open contact	1
Number of contacts as normally closed contact	1
Max. incandescent lamp load	3000W
Max. load fluorescent lamp	1190VA
Max. load fluorescent lamp (Duo circuit)	2552VA
Max. load fluorescent lamp (parallel compensated)	1360VA
Slider for hand switch	
Number of modular spacings	1
Built-in depth	60mm
Additional equipment possible	
Degree of protection (IP)	IP20

Desen cotat

R20
165,150

