


RD 25-40-R-24V AC/DC

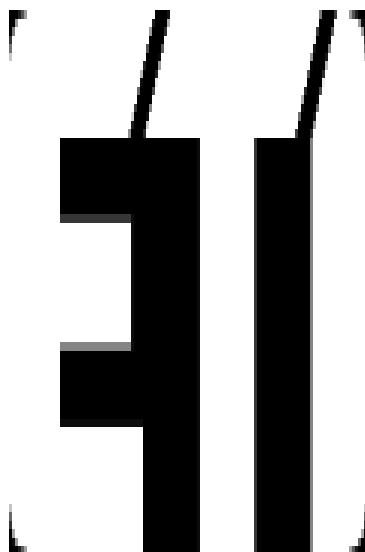

Specificatii

Cod ETI	002464055
Descriere	RD 25-40-R-24V AC/DC
Denumire clasă	Contactator modular
Func ie	Contactator modular
Tip	AC/DC
Mărime	4p, ON-OFF-AUTO, 2-modules
Număr de contacte NC	0
Frecven ă nominală (Hz)	50/60
Număr contacte NO	4
Curent nominal la AC-1/AC-7 (A)	25
Tensiunea nominala (V AC)	400V
Tensiunea de control Uc (V AC)	24V
Tensiunea de control Uc (V DC)	24V

Pagina de produse online 

Alta documentatie



[Model 3D](#)

[Declaratie CE](#)

[Eplan mușchi](#)

[Catalog caracteristici tehnice](#)

ETIM clasificare internationala

Clasificare	EC001653
Denumire clasă	Installation contactor for distribution board
Rated operating voltage	230...400V
Rated operation current	25A
Rated excitation voltage	230...400V
Voltage type (operating voltage)	AC
Voltage type (excitation voltage)	AC/DC
Number of contacts as normally open contact	4
Slider for hand switch	1
Number of modular spacings	2
Built-in depth	60mm
Additional equipment possible	1
Degree of protection (IP)	IP20

Desen cotat