

HRN-31



Specificatii

Cod ETI	002471450
Descriere	HRN-31
Denumire clasă	Releu control
Func ie	Relee monitorizare și control
Curent nominal (A)	16
AC Tensiunea bobinei Uc (V)	48...276
Număr contacte CO	1
DC tensiunea nominală a bobinei Uc (V)	48...276
Tipul voltajului	AC/DC
Tensiunea de alimentare (V)	48-276
Numarul de contacte	1
Tipul de control	Umax si Umin
Capacitatea maxima de incarcare AC1 (VA)	4000

[Pagina de produse online](#)

Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)




[Declaratie CE](#)

[Eplan mușchi](#)


ETIM clasificare internațională

Clasificare	EC001438
Denumire clasă	Voltage monitoring relay
Type of electric connection	Screw connection
Single-phase under voltage possible	1
Single-phase over voltage possible	1
Single-phase hysteresis possible	1
Contains function DC-under voltage	1
Contains function DC-over voltage	1
Contains function DC-voltage hysteresis	1
Voltage measuring range 1	48...276V
Type of voltage measuring range	AC/DC
Rated control supply voltage AC 50 Hz	48...276V
Voltage type for actuating	AC
Min. adjustable delay-on energization time	0,5s
Max. permitted delay-on energization time	10s
Min. adjustable off-delay time	0,5s
Max. permitted off-delay time	10s
Number of contacts as change-over contact	1
Width	18mm
Height	90mm
Depth	65mm


Simbol/Conexiune

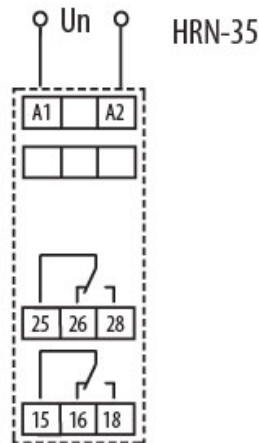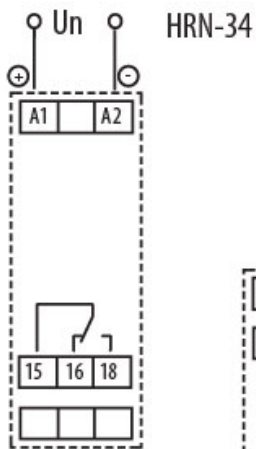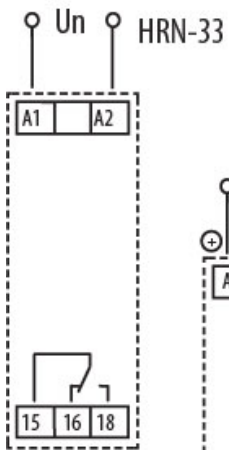

HRN-33



HRN-34



HRN-35

