

NH00/I gG 160A/500V



Specificatii

Cod ETI	004192216
Descriere	NH00/I gG 160A/500V
Denumire clasă	Siguranță
Curent nominal (A)	160
Tip	NH-I
Mărime	NH00
Caracteristici	gG
Tensiune nominală AC (V)	500
Tensiune nominală DC (V)	250
Indicator	Indicator de stare al siguranțelor
Capacitatea de rupere (AC) (kA)	120
Putere disipată (W)	11,2
Standarde	IEC 60269-1, IEC 60269-2
Operare Joule integrală (A2s)	275.000
Curentul de pre-arc (A2s)	73.600
Aplicație	Pentru protecția cablului

[Pagina de produse online](#)

Alta documentatie



[Catalog caracteristici tehnice](#)

[CertIFICATE](#)

[Model 3D](#)

[Manual de instrucțiuni](#)


[Declarație CE](#)

[Eplan mușchi](#)

ETIM clasificare internationala


Clasificare	EC000055
Denumire clasă	Low Voltage HRC fuse
Construction size	NH00
Rated current	160
Rated voltage	500
Voltage type	AC
Rated switching capacity	120
Utilization category	gL/gG (cable protection/equipment protection)
Type of fuse status indicator	Combination fuse status indicator
Insulated metal gripping lugs (IMGL)	1

Caracteristici

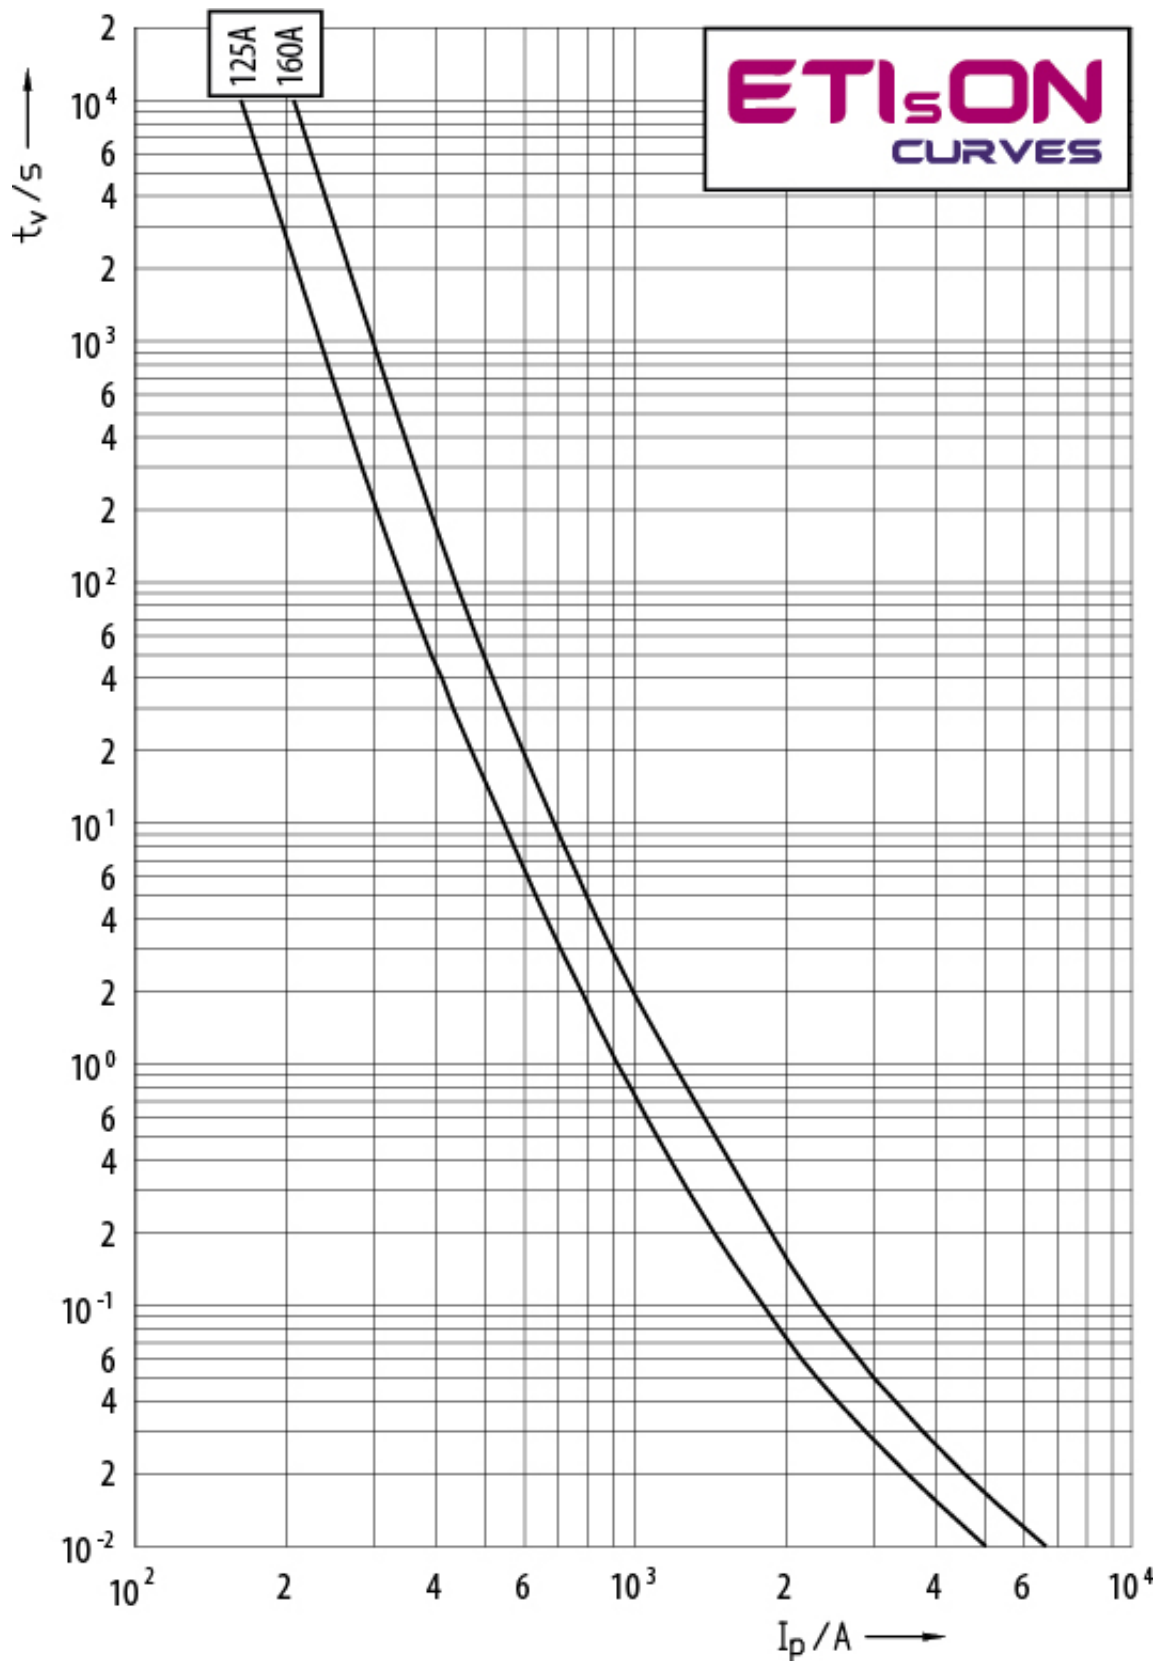


Desen cotat

	A	B	C	D	E	F	G	H	I	J	K		
NV00C	79	53	47	35	15	21	52	7,5				6	kombi
NV00C I	79	53	47	35	15	21	52	7,5				6	kombi
NV00	79	53	47	35	15	28	56	12				6	kombi
NV00 I	79	53	47	35	15	28	56	12				6	kombi
NV0	125	68	65	35	15	28	56	12				6	kombi
NV1C	135	68	65	40	15	28	61	12				6	kombi
NV1C I	135	68	65	40	15	28	61	12				6	kombi
NV1	135	72	65	40	20	46	65	14				6	kombi
NV1 I	135	72	65	40	20	46	65	14				6	kombi
NV2C	150	72	65	48	20	46	73	14				6	kombi
NV2C I	150	72	65	48	20	46	73	14				6	kombi
NV2	150	72	65	48	26	54	73	14				6	kombi
NV2 I	150	72	65	48	26	54	73	14				6	kombi
NV3C	150	72	65	60	26	54	84	14				6	kombi
NV3	150	72	65	60	33	65	84	14				6	kombi
NV4	200	75	66	87	50	100	121	24	150	16		8	
NV4a	200	99	87	85	50	95	121	27				6	
NV4a SI*	200	99	87	85	50	95	121	27				6	
NV1/1000V	155	90	87	40	20	45	59	9				6	

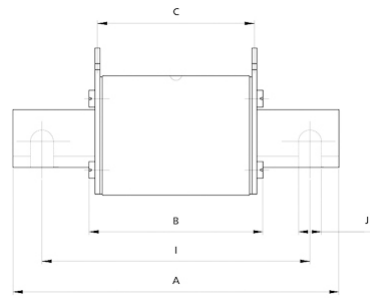

	Striker pin			
	K	L	M	S1
00C	0	20.7	16.7	7.5
00	0	20.7	16.7	7.5
1	13.7	19.7	25	12
2	16.2	27.4	25	12
3	17	35.6	25	12
4a	24	49	25	12

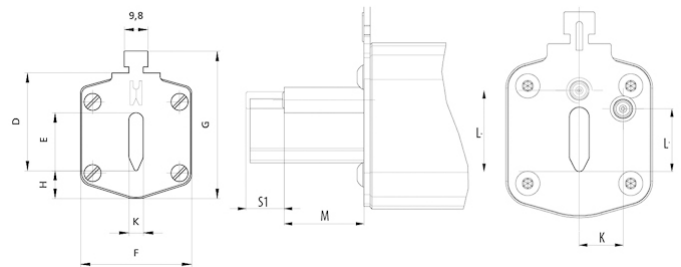

Caracteristicile curentului de întrerupere

