

VVC3 7,2kV/315A 442



Specificatii

Cod ETI	004220622
Descriere	VVC3 7,2kV/315A 442
Denumire clasă	Siguranță
Curent nominal (A)	315
Tip	NEW VVC 50N striker
Mărime	442
Tensiune nominală AC (V)	7200
Indicator	50N forta de rupere
Capacitatea de rupere (AC) (kA)	63
Putere disipată (W)	320
Aplica ie	protectie transformator, protectie motor, protectie grup condensatoare , iinstalare in unitatea principala inelara
Curentul nominal minim de rupere (A)	1575
Rezistență la frig (mΩ)	1.75

Pagina de produse online

Alta documentatie



Catalog caracteristici tehnice


Model 3D

Eplan mușchi

ETIM clasificare internationala

Clasificare	EC003507
Denumire clasă	Medium-/high voltage fuse
Rated current	315A
Rated voltage	7,2kV
Voltage type	AC
Rated frequency	45...60Hz
Breaking capacity	63kA
Utilization category	Other
Application	Other
Length	442mm
Diameter	83,5mm
Performance category according to IEC 60282-1	Back-up
With striker	1
Standard	IEC
Installation technique	Air

Caracteristici

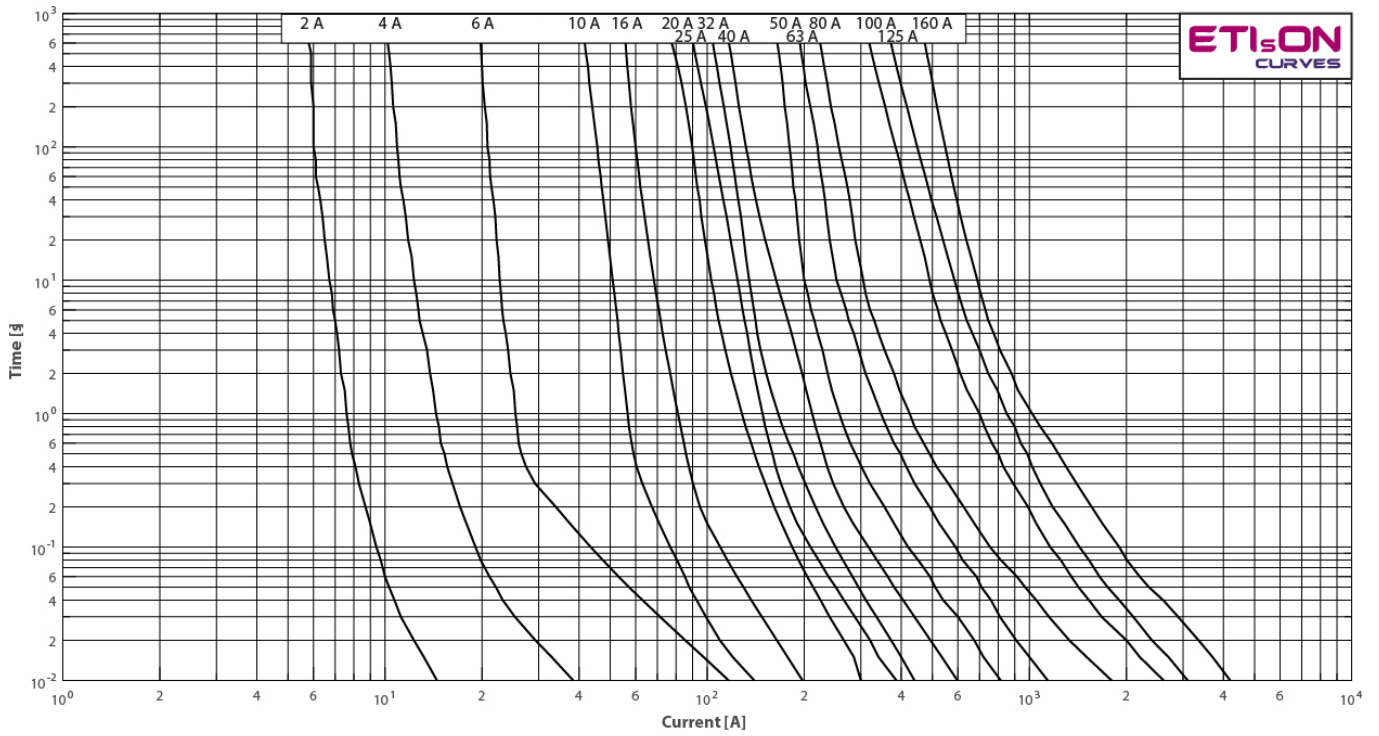

Desen cotat



Caracteristicile curentului de întrerupere

