

VVC3 24kV/100A



Specificatii

Cod ETI	004250017
Descriere	VVC3 24kV/100A
Denumire clasă	Siguranță
Curent nominal (A)	100
Tip	NEW VVC 50N striker
Mărime	442
Tensiune nominală AC (V)	24000
Indicator	50N forta de rupere
Capacitatea de rupere (AC) (kA)	63
Putere disipată (W)	220
Aplica ie	protectie transformator, protectie motor, protectie grup condensatoare , iinstalare in unitatea principala inelara
Curentul nominal minim de rupere (A)	355
Rezistență la frig (mΩ)	12.9
efuse	1

Pagina de produse online

Alta documentatie



[Catalog caracteristici tehnice](#)

[Certificate](#)

[Model 3D](#)

[Eplan mușchi](#)

ETIM clasificare internationala

Clasificare	EC003507
Denumire clasă	Medium-/high voltage fuse
Rated current	100A
Rated voltage	24kV
Voltage type	AC
Rated frequency	45...60Hz
Breaking capacity	63kA
Utilization category	Other
Application	Other
Length	442mm
Diameter	83,5mm
Performance category according to IEC 60282-1	Back-up
With striker	1
Standard	IEC
Installation technique	Air


Caracteristici



ETIM
International



Desen cotat

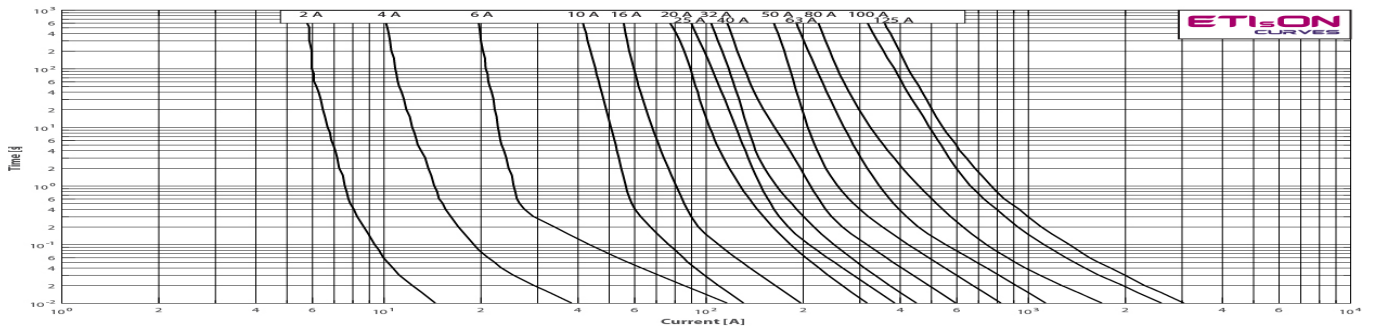

Caracteristicile curentului de întrerupere

