

VVC3 36kV/50A



Specificatii

Cod ETI	004260014
Descriere	VVC3 36kV/50A
Denumire clasă	Siguranță
Curent nominal (A)	50
Tip	NEW VVC 50N striker
Mărime	537
Tensiune nominală AC (V)	36000
Indicator	50N forta de rupere
Capacitatea de rupere (AC) (kA)	31.5
Putere disipată (W)	145
Aplicație	protecție transformator, protecție motor, protecție grup condensatoare, instalare în unitatea principală înelara
Curentul nominal minim de rupere (A)	175
Rezistență la frig (mΩ)	47
efuse	1

[Pagina de produse online](#) 

Alta documentatie



[Catalog caracteristici tehnice](#)


[Model 3D](#)

[Eplan mușchi](#)

ETIM clasificare internationala

Clasificare	EC003507
Denumire clasă	Medium-/high voltage fuse
Rated current	50A
Rated voltage	36kV
Voltage type	AC
Rated frequency	45...60Hz
Breaking capacity	31,5kA
Utilization category	Other
Application	Other
Length	537mm
Diameter	83,5mm
Performance category according to IEC 60282-1	Back-up
With striker	1
Standard	IEC
Installation technique	Air

Caracteristici

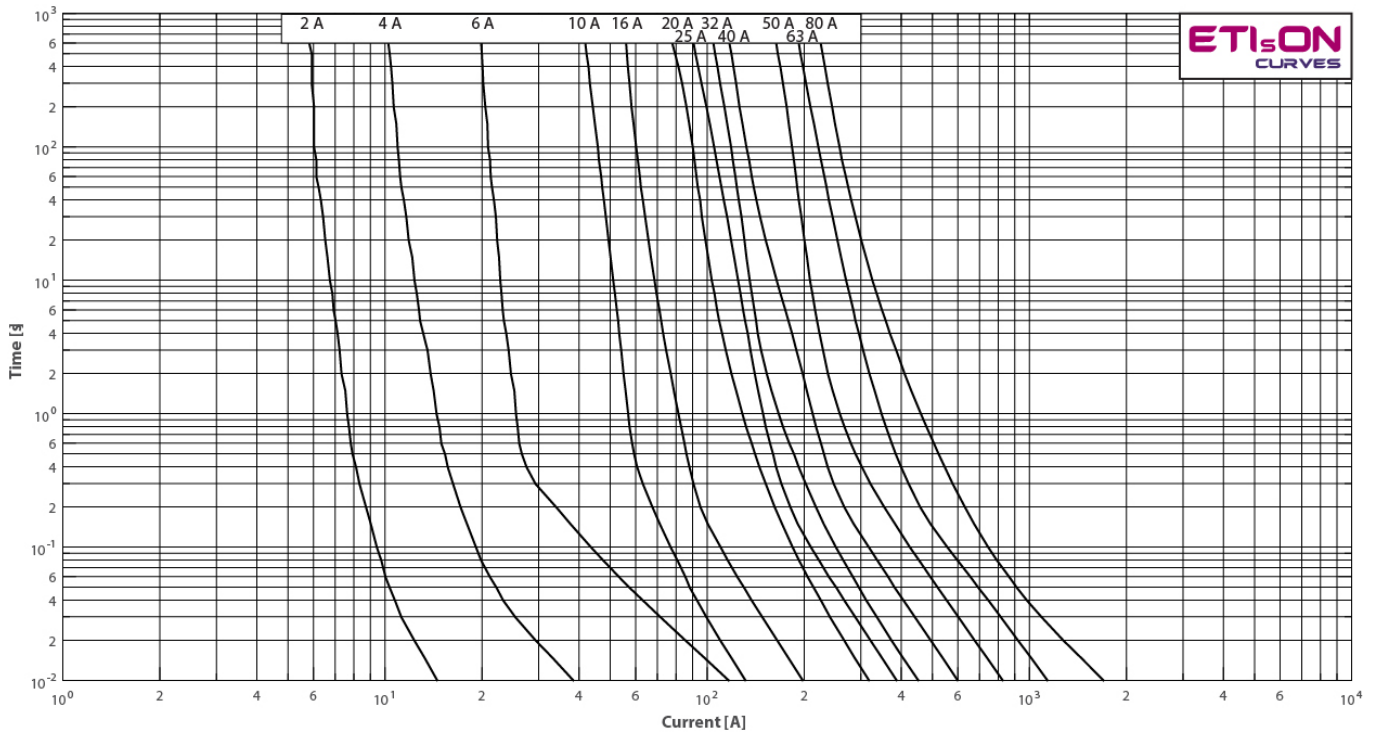

Desen cotat



Caracteristicile curentului de întrerupere

