

VVC3 36kV/80A



Specificatii

| | |
|--------------------------------------|--|
| Cod ETI | 004260016 |
| Descriere | VVC3 36kV/80A |
| Denumire clasă | Siguranță |
| Curent nominal (A) | 80 |
| Tip | NEW VVC 50N striker |
| Mărime | 537 |
| Tensiune nominală AC (V) | 36000 |
| Indicator | 50N forta de rupere |
| Capacitatea de rupere (AC) (kA) | 31.5 |
| Putere disipată (W) | 270 |
| Aplica ie | protectie transformator, protectie motor, protectie grup condensatoare , iinstalare in unitatea principala inelara |
| Curentul nominal minim de rupere (A) | 280 |
| Rezistență la frig (mΩ) | 25.5 |
| efuse | 1 |

[Pagina de produse online](#)

Alta documentatie



[Catalog caracteristici tehnice](#)


[Model 3D](#)

[Eplan mușchi](#)

ETIM clasificare internationala

| | |
|---|---------------------------|
| Clasificare | EC003507 |
| Denumire clasă | Medium-/high voltage fuse |
| Rated current | 80A |
| Rated voltage | 36kV |
| Voltage type | AC |
| Rated frequency | 45...60Hz |
| Breaking capacity | 31,5kA |
| Utilization category | Other |
| Application | Other |
| Length | 537mm |
| Diameter | 83,5mm |
| Performance category according to IEC 60282-1 | Back-up |
| With striker | 1 |
| Standard | IEC |
| Installation technique | Air |

Caracteristici

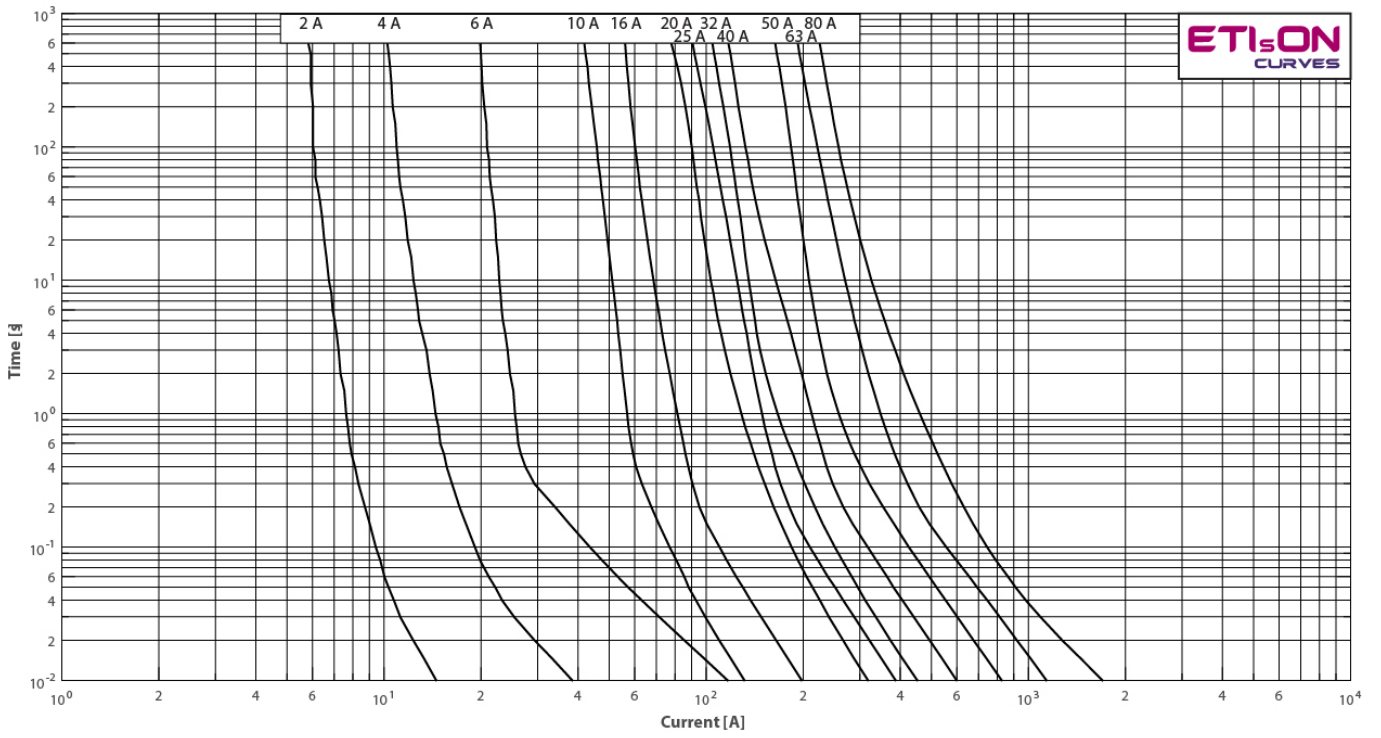

Desen cotat



Caracteristicile curentului de întrerupere

