

# CEC016.PR 24V-DC



## Specificatii

Cod ETI	004641217
Descriere	CEC016.PR 24V-DC
Denumire clasă	Miniatură contactor
Func ie	Contactoare miniatură
I (AC1) (A)	22
I (AC3 400V) (A)	16
P (AC3 kW) (kW)	7,5
Număr de contacte NC	2
Număr de contacte auxiliare NO	0
Număr contacte NO	2
Tensiunea nominala (V AC)	400
Tensiunea de control Uc (V DC)	24V

Pagina de produse online [🔗](#)

## Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni

Declaratie CE



Eplan mușchi

## ETIM clasificare internationala


Clasificare	EC000066
Denumire clasă	Power contactor, AC switching
Rated control supply voltage DC	24...24V
Voltage type for actuating	DC
Rated operation current I <sub>e</sub> at AC-1, 400 V	22A
Rated operation current I <sub>e</sub> at AC-3, 400 V	18,7A
Rated operation power at AC-3, 400 V	7,5kW
Type of electrical connection of main circuit	Frame clamp
Number of normally closed contacts as main contact	2
Number of normally open contacts as main contact	2

## Schema de conexiuni

CEC07.4P-230V-50/60Hz	004641200
CEC09.4P-230V-50/60Hz	004641201
CEC012.4P-230V-50/60Hz	004641202
CEC016.4P-230V-50/60Hz	004641203
CEC07.4P-24VDC	004641210
CEC09.4P-24VDC	004641211
CEC012.4P-24VDC	004641212
CEC016.4P-24VDC	004641213
CEC07.PR-230V-50/60HZ	004641204
CEC09.PR-230V-50/60HZ	004641205
CEC012.PR-230V-50/60HZ	004641206
CEC016.PR-230V-50/60HZ	004641207
CEC07.PR-24V-DC	004641214
CEC09.PR-24V-DC	004641215
CEC012.PR-24V-DC	004641216
CEC016.PR-24V-DC	004641217

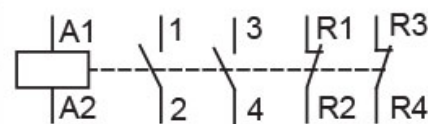

## Descriere

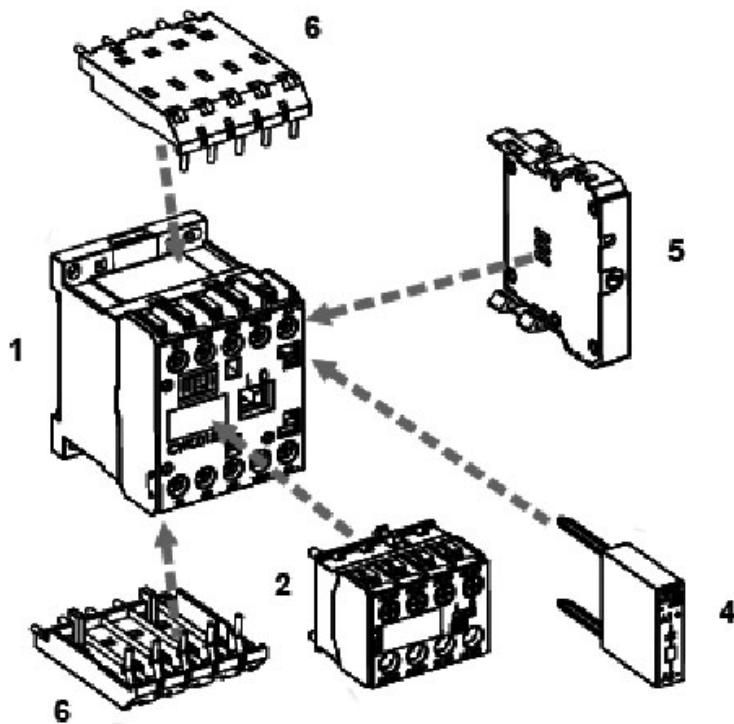

- 1 - Mini contactor
- 2 - Auxiliary frontal contacts block
- 3 - Mechanical interlock block
- 4 - Surge suppressor blocks
- 5 - Timer
- 6 - Link module for printed circuit board

