




## Desen cotat

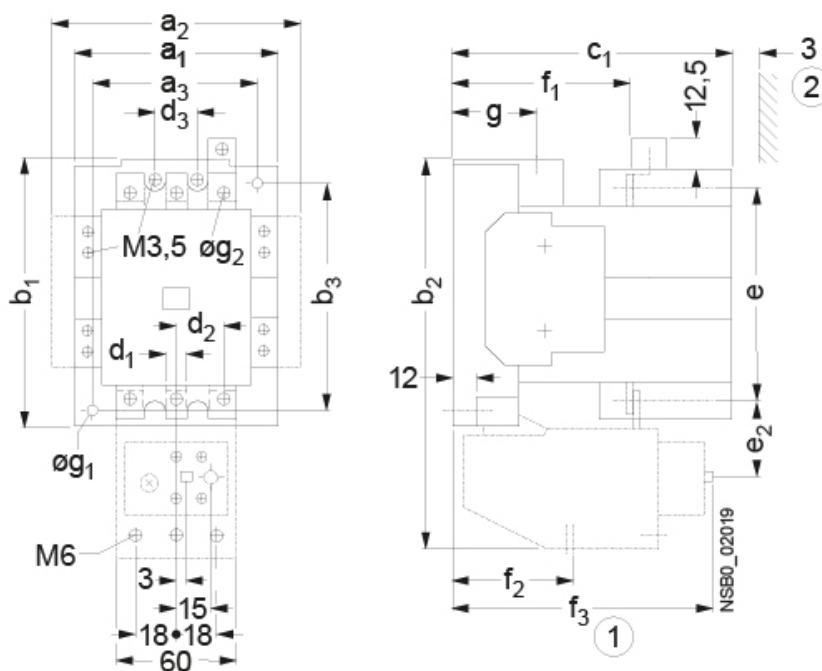

- ① Dimension for the square OFF-button (stroke 3 mm)  
Dimension for the round RESET-button (stroke 2.5 mm)  
less then 2.5 mm.
- ② Minimum clearance from insulated components 3 mm  
Minimum clearance from earthed components 10 mm

	a1	a2	a3	b1	b2	b3	c1	d1	d2	d3	e	e2	f1	f2	f3	g1	g2
CES 65	90	113	70	117	175	100	123	8	26.5	25	94	80	63	122	28	4.8	6.1 (M6)
CES 75	100	123	80	133	194	110	140	8	26.5	25	107	89	63	122	39	5.5	6.1 (M6)
CES 85	100	123	80	133	194	110	140	10.5	26.5	25	116	89	63	122	39	5.5	6.1 (M6)
CES 105	120	143	100	150	232	130	150	20	42	37	139	40.5	93	80	146	6.3	9 (M)

## Schema de conexiuni

