

# CEM50.00-230V-50/60Hz



## Specificatii

|                                |                          |
|--------------------------------|--------------------------|
| Cod ETI                        | 004648103                |
| Descriere                      | CEM50.00-230V-50/60Hz    |
| Denumire clasă                 | Contactorul motorului    |
| Func ie                        | Contactor pentru motoare |
| I (AC1) (A)                    | 80                       |
| I (AC3 400V) (A)               | 50                       |
| P (AC3 kW) (kW)                | 22                       |
| Număr de poli                  | 3                        |
| Număr de contacte auxiliare NO | 0                        |
| Tensiunea nominala (V AC)      | 1000                     |
| Tensiunea de control Uc (V AC) | 230                      |

Pagina de produse online [🔗](#)

## Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni

Declaratie CE


Eplan mușchi

## ETIM clasificare internationala

|   |                               |
|---|-------------------------------|
| Clasificare   | EC000066                      |
| Denumire clasă  | Power contactor, AC switching |
| Rated control supply voltage AC 50 Hz                 | 230...230V                    |
| Rated control supply voltage AC 60 Hz                 | 230...230V                    |
| Rated control supply voltage DC                       | 230...230V                    |
| Voltage type for actuating                            | AC                            |
| Rated operation current I <sub>e</sub> at AC-1, 400 V | 80A                           |
| Rated operation current I <sub>e</sub> at AC-3, 400 V | 50A                           |
| Rated operation power at AC-3, 400 V                  | 22kW                          |
| Modular version                                       |                               |
| Type of electrical connection of main circuit         | Frame clamp                   |
| Number of normally open contacts as main contact      | 3                             |

## Desen cotat

|       | AC/DC |
|-------|-------|
| CEM50 | A=116 |
| CEM65 | A=116 |
| CEM80 | A=116 |

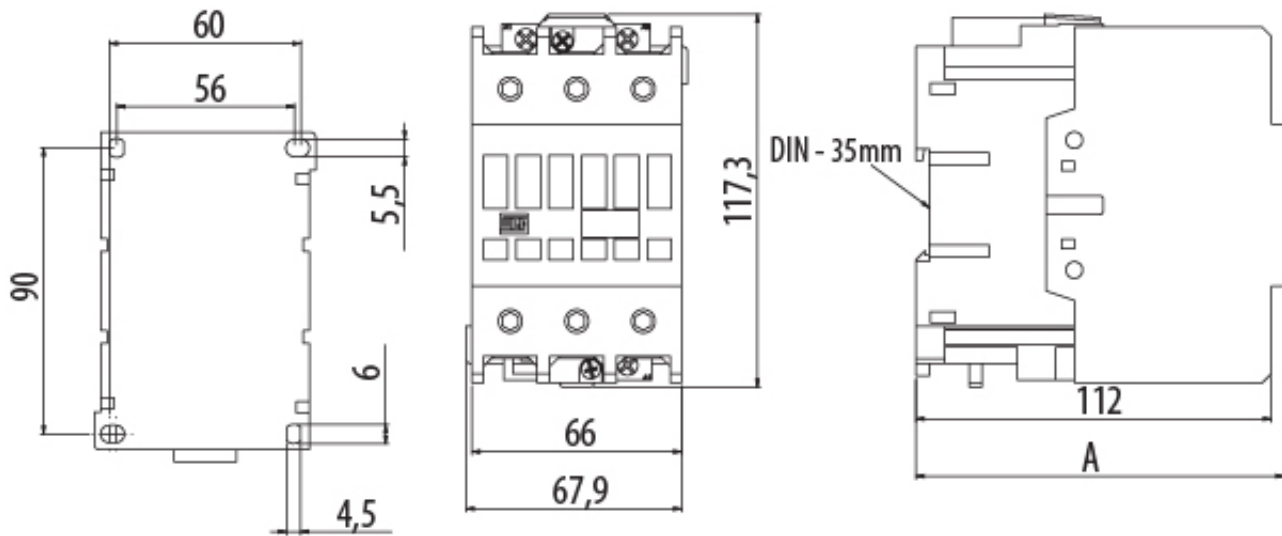

## Schema de conexiuni

