

EB2 125/3S 50A 3p



Specificatii

Cod ETI	004671043
Descriere	EB2 125/3S 50A 3p
Denumire clasă	Întrepruător de circuit în car
Curent nominal (A)	50
Număr de poli	3
Grup Catalog	EB2
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	36/36
Tensiune nominala de lucru (V DC)	250V
Reglare termica	0,63-1
Ajustare magnetica	6-12
Reglabil sau fix	ajustabil

Pagina de produse online [🔗](#)

Alta documentatie



Model 3D

Manual de instructiuni

Declaratie CE


Eplan mușchi

Catalog caracteristici tehnice

ETIM clasificare internationala


Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I _u	50A
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz	36/36kA
Overload release current setting	31.5...50A
Adjustment range undelayed short-circuit release	300...600A
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	3
Type of control element	Rocker lever
Motor drive integrated	
Motor drive optional	1
Degree of protection (IP)	IP20

Caracteristici

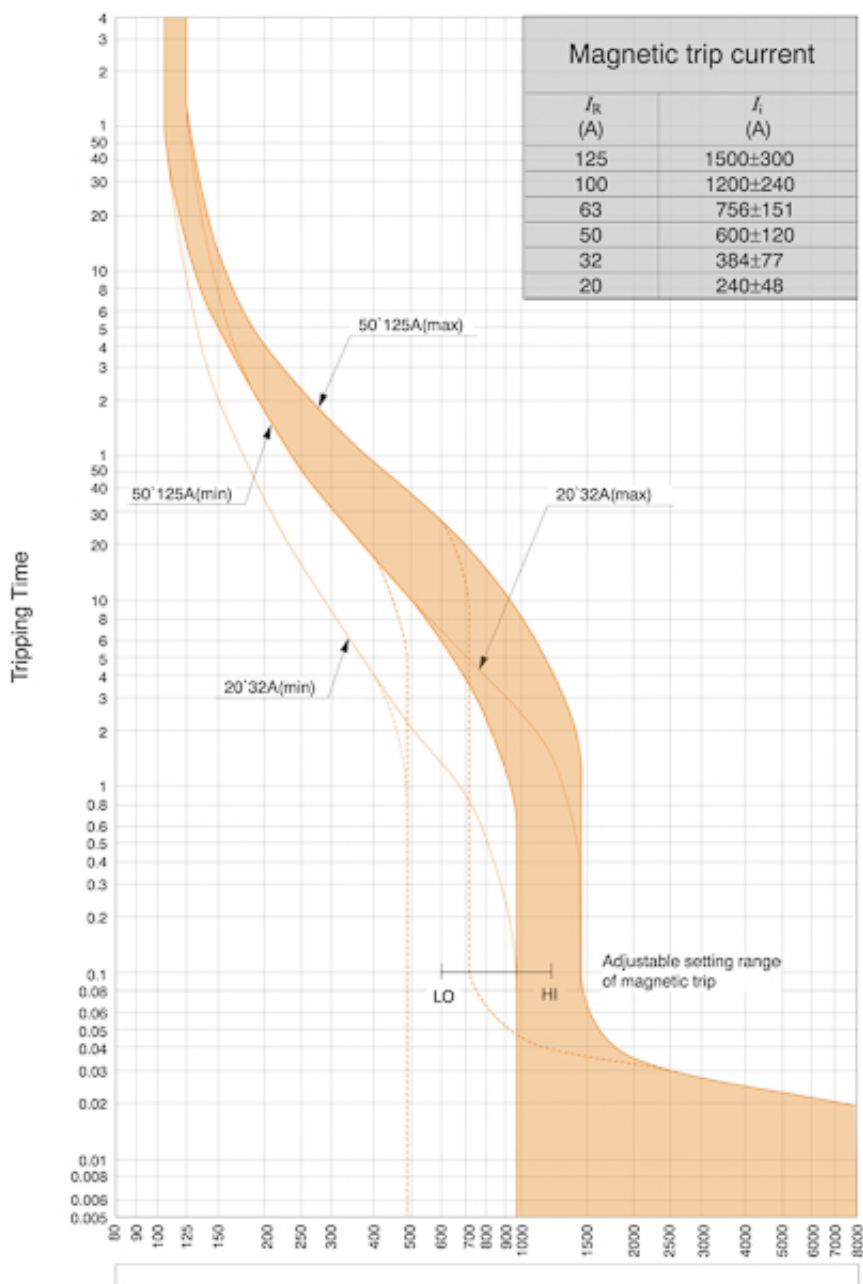

Desen cotat

Front connected

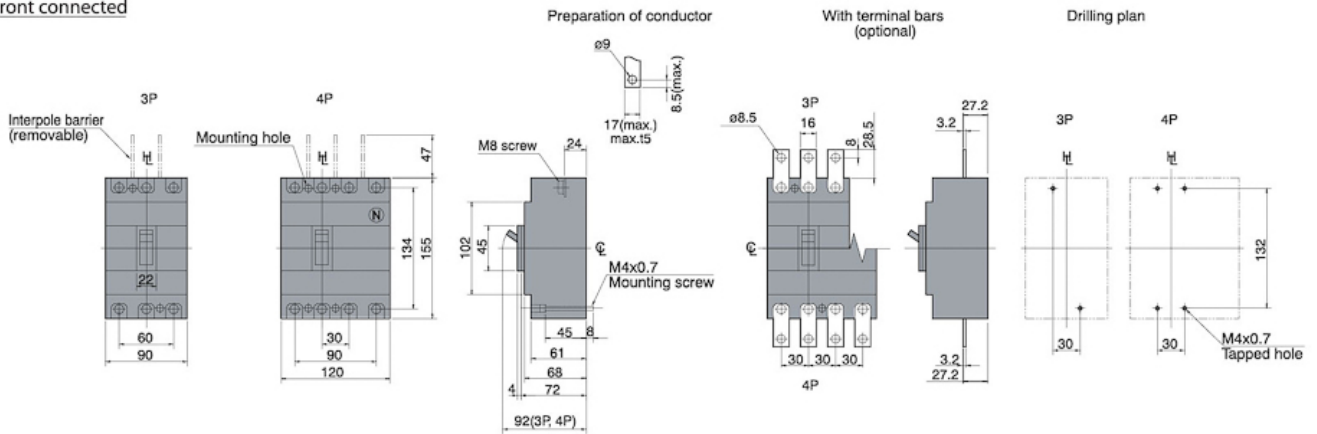

Rear connected

