

## EB2 400/4L 250A 4p



### Specificatii

Cod ETI	004671093
Descriere	EB2 400/4L 250A 4p
Denumire clasă	Înterupător de circuit în car
Curent nominal (A)	250
Număr de poli	4
Grup Catalog	EB2
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	25/25
Tensiune nominala de lucru (V DC)	250V
Reglare termica	0,63-1
Ajustare magnetica	6-12
Reglabil sau fix	ajustabil

Pagina de produse online

### Alta documentatie



Model 3D

Declaratie CE


Eplan mușchi

Catalog caracteristici tehnice

## ETIM clasificare internationala


Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I <sub>u</sub>	250A
Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz	25/25kA
Overload release current setting	157.5...250A
Adjustment range undelayed short-circuit release	1500...3000A
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	4
Type of control element	Rocker
Motor drive integrated	
Motor drive optional	1
Degree of protection (IP)	IP20

# Caracteristici

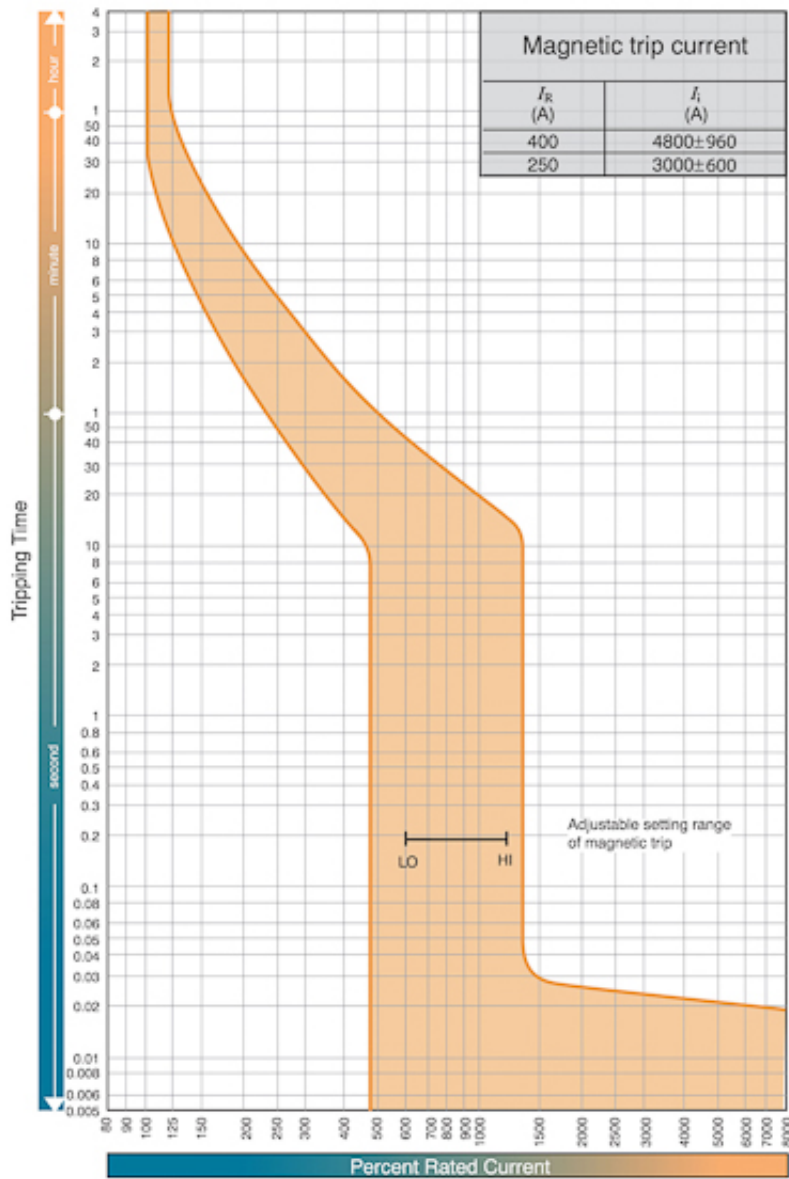

# Desen cotat

## Front connected

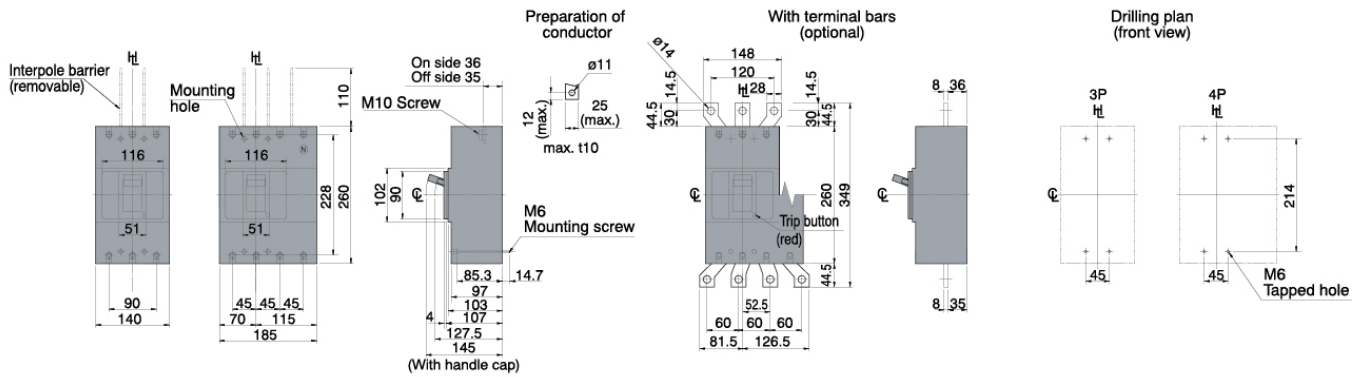

## Rear connected

