

EB2S 250/4LA 200A 4p



Specificatii

Cod ETI	004671897
Descriere	EB2S 250/4LA 200A 4p
Denumire clasă	Înterupător de circuit în car
Func ie	MCCB
Curent nominal (A)	200
Număr de poli	4
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	16/8
Tensiune nominala de lucru (V DC)	250V
Reglare termica	0,63-1
Ajustare magnetica	5-11
Reglabil sau fix	ajustabil

Pagina de produse online

Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni

Declaratie CE



Eplan mușchi

ETIM clasificare internationala

Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I _u	200A
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz	16kA
Overload release current setting	126...200A
Adjustment range undelayed short-circuit release	650...2600A
Integrated earth fault protection	
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	4
Type of control element	Rocker lever
Motor drive integrated	
Motor drive optional	1
Degree of protection (IP)	IP20

Caracteristici

EB2S 250 LA, EB2S 250 SA, EB2S 250 HA

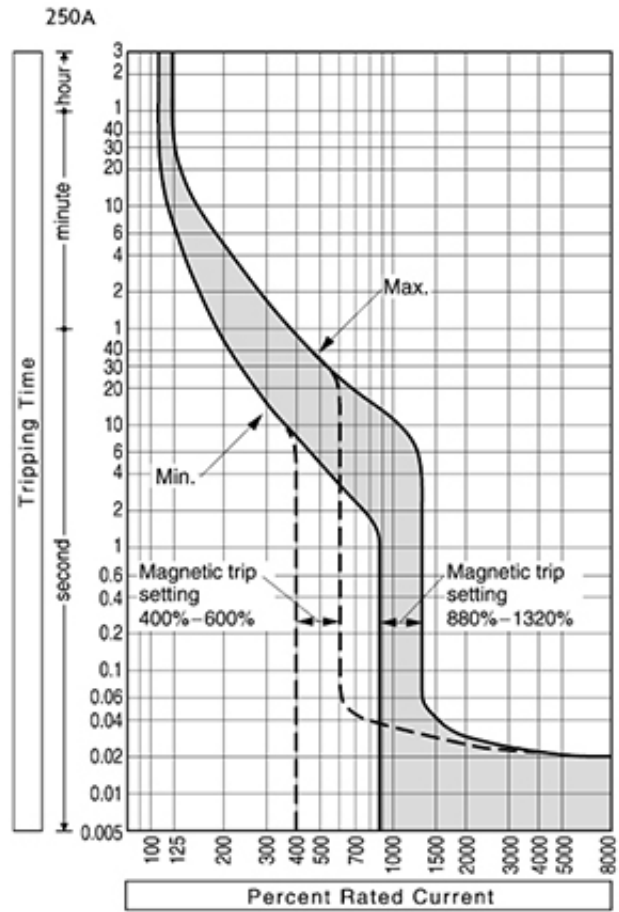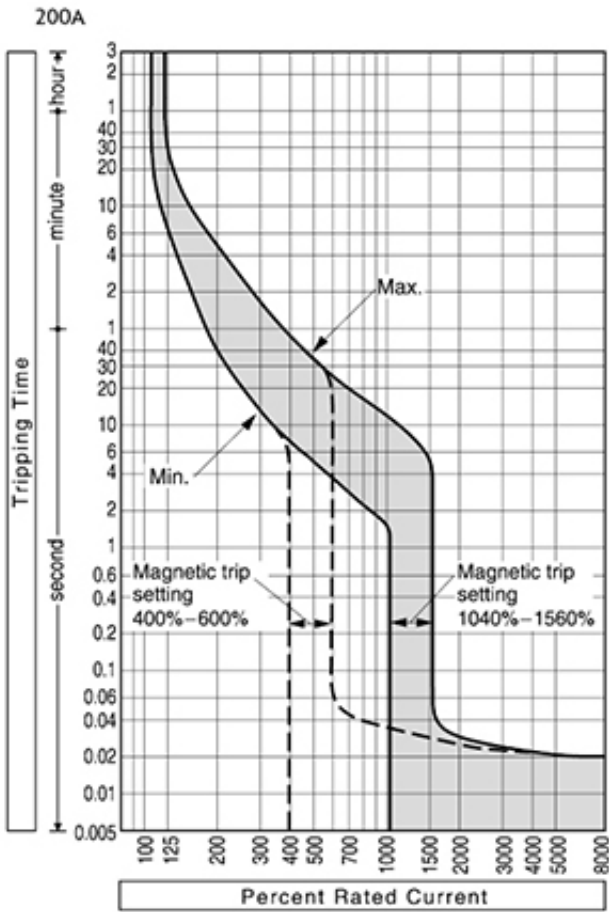

Desen cotat

EB2S 160 F & A



EB2S 250 F & A

