


EB2S 160/3HA 80A 3p

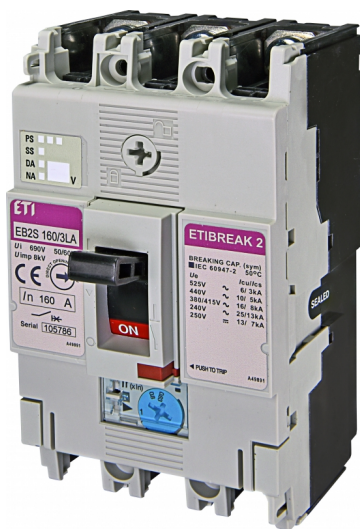

Specificatii

Cod ETI	004671922
Descriere	EB2S 160/3HA 80A 3p
Denumire clasă	Înterupător de circuit în car
Func ie	MCCB
Curent nominal (A)	80
Număr de poli	3
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	40/20
Tensiune nominala de lucru (V DC)	250V
Reglare termica	0,63-1
Ajustare magnetica	fixed
Reglabil sau fix	ajustabil

Pagina de produse online [🔗](#)

Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni


Declaratie CE

Eplan mușchi

ETIM clasificare internationala


Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I _u	80A
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz	40kA
Overload release current setting	50.4...80A
Adjustment range undelayed short-circuit release	1000...1000A
Integrated earth fault protection	
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	3
Type of control element	Rocker lever
Motor drive integrated	
Motor drive optional	
Degree of protection (IP)	IP20

Caracteristici

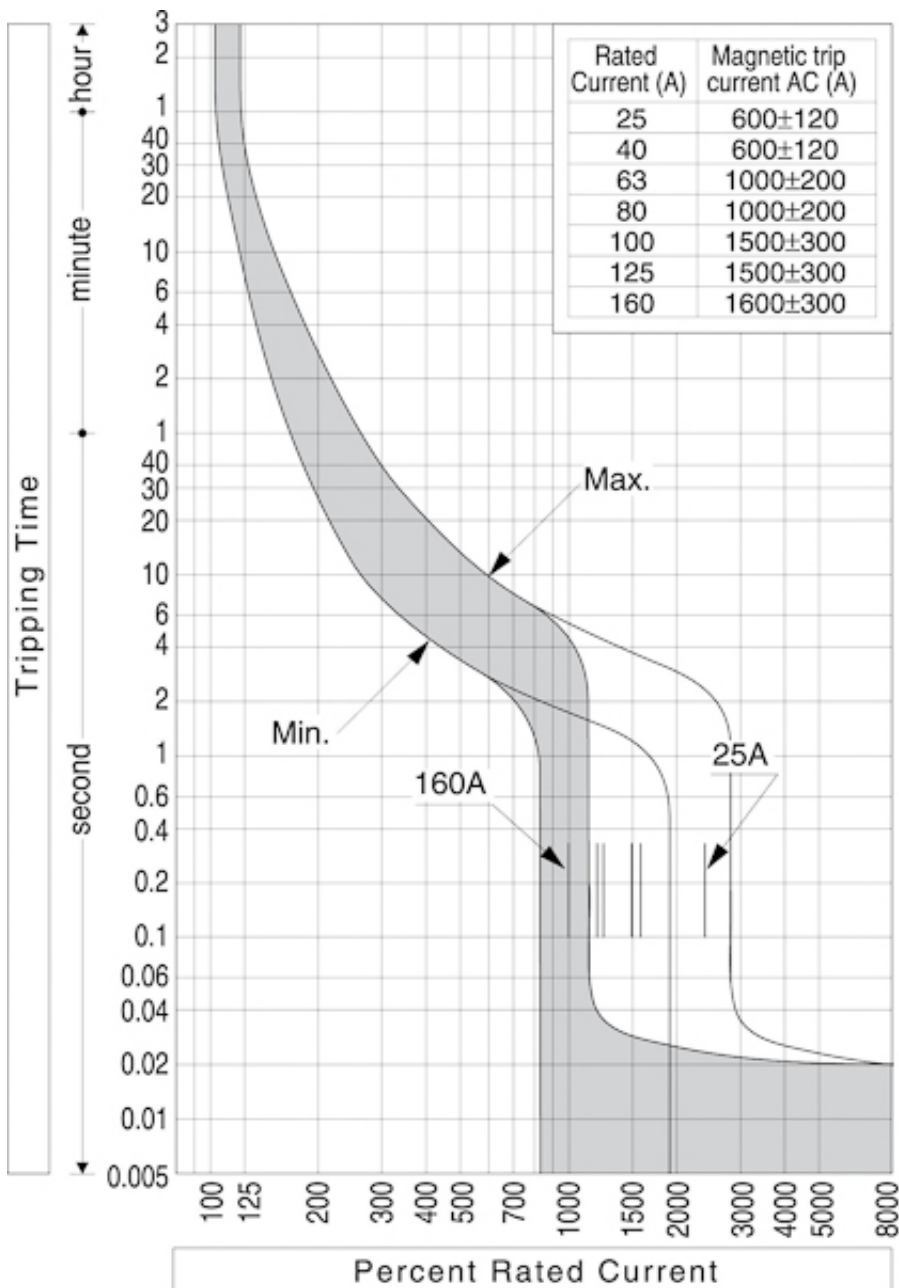

Desen cotat

EB2S 160 F & A

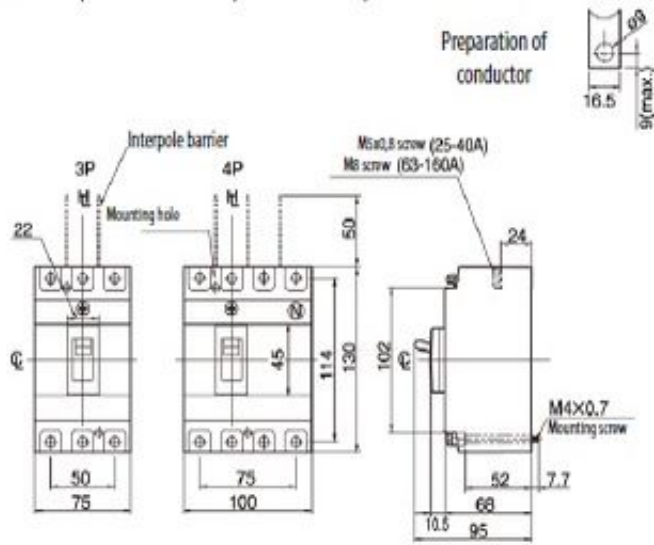

EB2S 250 F & A

