

# EB2S 250/4HA 200A 4p

## Specificatii



Cod ETI	004671937
Descriere	EB2S 250/4HA 200A 4p
Denumire clasă	Înterupător de circuit în car
Func ie	MCCB
Curent nominal (A)	200
Număr de poli	4
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	40/20
Tensiune nominala de lucru (V DC)	250V
Reglare termica	0,63-1
Ajustare magnetica	5-11
Reglabil sau fix	ajustabil

[Pagina de produse online](#) 

## Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)

[Declaratie CE](#)



[Eplan mușchi](#)

## ETIM clasificare internationala

Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I <sub>u</sub>	200A
Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz	40kA
Overload release current setting	126...200A
Adjustment range undelayed short-circuit release	650...2600A
Integrated earth fault protection	
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	4
Type of control element	Rocker lever
Motor drive integrated	
Motor drive optional	1
Degree of protection (IP)	IP20

# Caracteristici

EB2S 250 LA, EB2S 250 SA, EB2S 250 HA

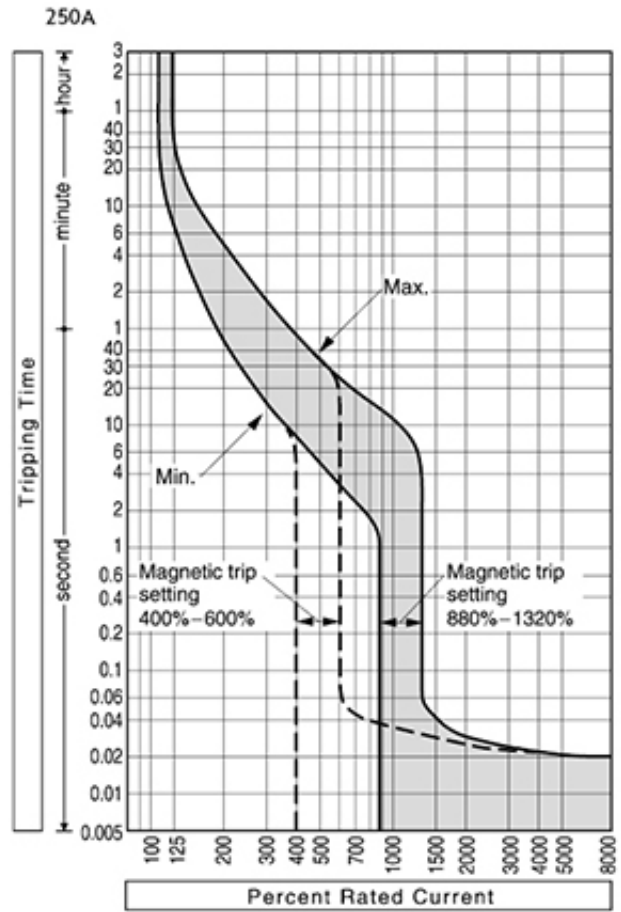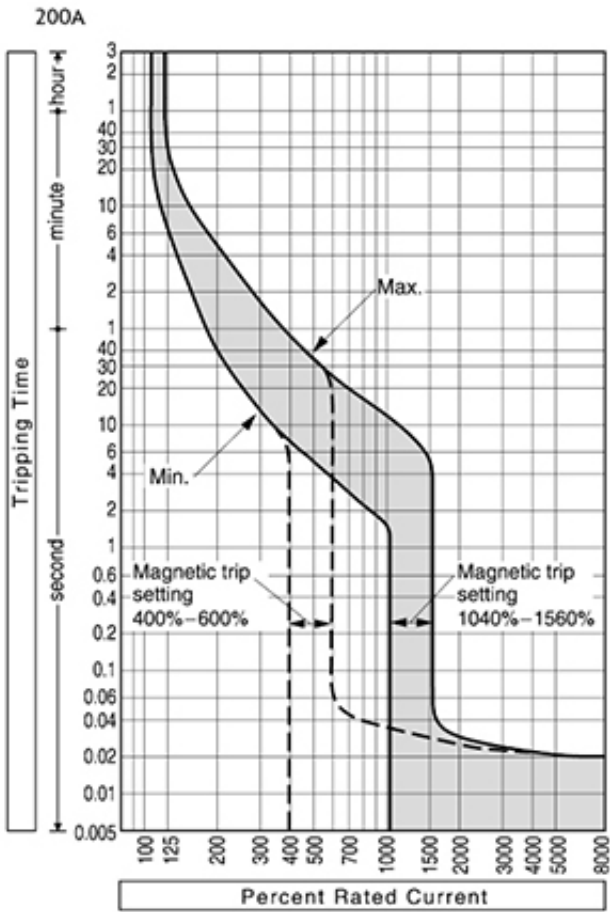

# Desen cotat

EB2S 160 F & A



EB2S 250 F & A

