


## EB2 800/4LE 800A 4p AGN

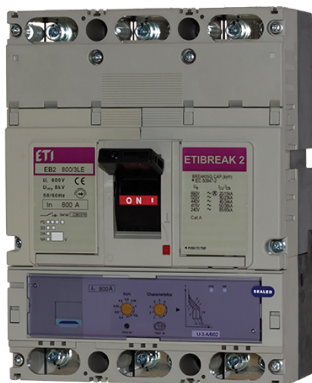

### Specificatii

Cod ETI	004672182
Descriere	EB2 800/4LE 800A 4p AGN
Denumire clasă	Înterupător de circuit în car
Curent nominal (A)	800
Număr de poli	4
Grup Catalog	EB2
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	50/50
Tensiune nominala de lucru (V DC)	n.a.
Reglare termica	0,4-1
Ajustare magnetica	adjustable
Reglabil sau fix	ajustabil

Pagina de produse online

### Alta documentatie



Model 3D

Manual de instructiuni

Declaratie CE



Eplan mușchi

Catalog caracteristici tehnice

## ETIM clasificare internationala



Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I <sub>u</sub>	800A
Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz	50/50kA
Overload release current setting	320...800A
Adjustment range short-term delayed short-circuit release	800...8000A
Adjustment range undelayed short-circuit release	4480...9600A
Integrated earth fault protection	1
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	4
Type of control element	Rocker
Motor drive integrated	
Motor drive optional	1
Degree of protection (IP)	IP20

# Caracteristici

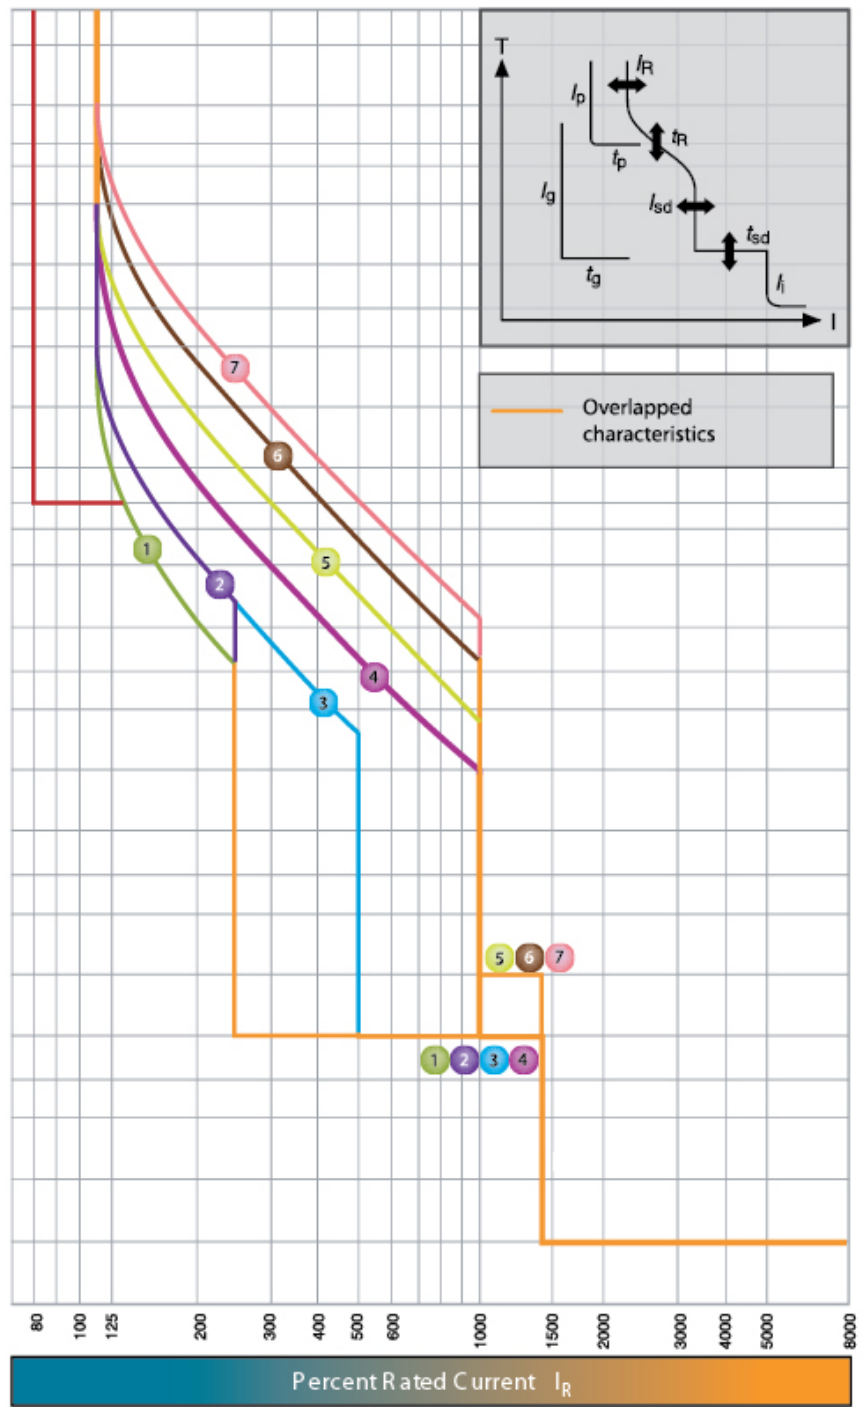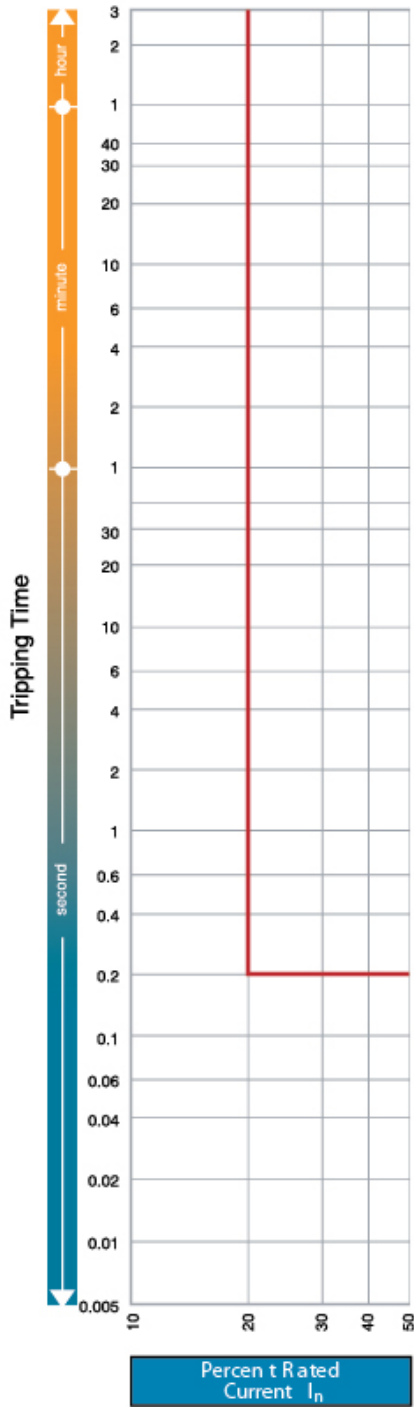

# Desen cotat

Front-connected

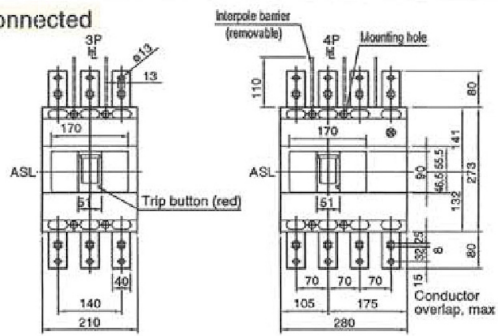

Drilling plan (front view)

