


EB2 800/4HE 800A 4p

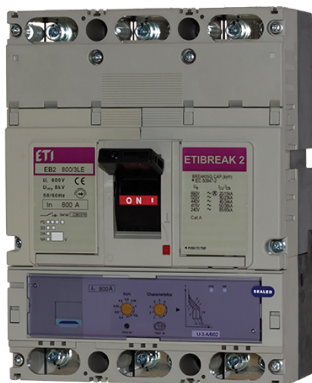

Specificatii

Cod ETI	004672203
Descriere	EB2 800/4HE 800A 4p
Denumire clasă	Întrepruător de circuit în car
Curent nominal (A)	800
Număr de poli	4
Grup Catalog	EB2
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	125/94
Tensiune nominala de lucru (V DC)	n.a.
Reglare termica	0,4-1
Ajustare magnetica	adjustable
Reglabil sau fix	ajustabil

Pagina de produse online

Alta documentatie



Model 3D

Manual de instructiuni

Declaratie CE



Eplan mușchi

Catalog caracteristici tehnice

ETIM clasificare internationala



Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I _u	800A
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz	125/94kA
Overload release current setting	320...800A
Adjustment range short-term delayed short-circuit release	800...8000A
Adjustment range undelayed short-circuit release	4480...9600A
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	4
Type of control element	Rocker
Motor drive integrated	
Motor drive optional	1
Degree of protection (IP)	IP20

Caracteristici

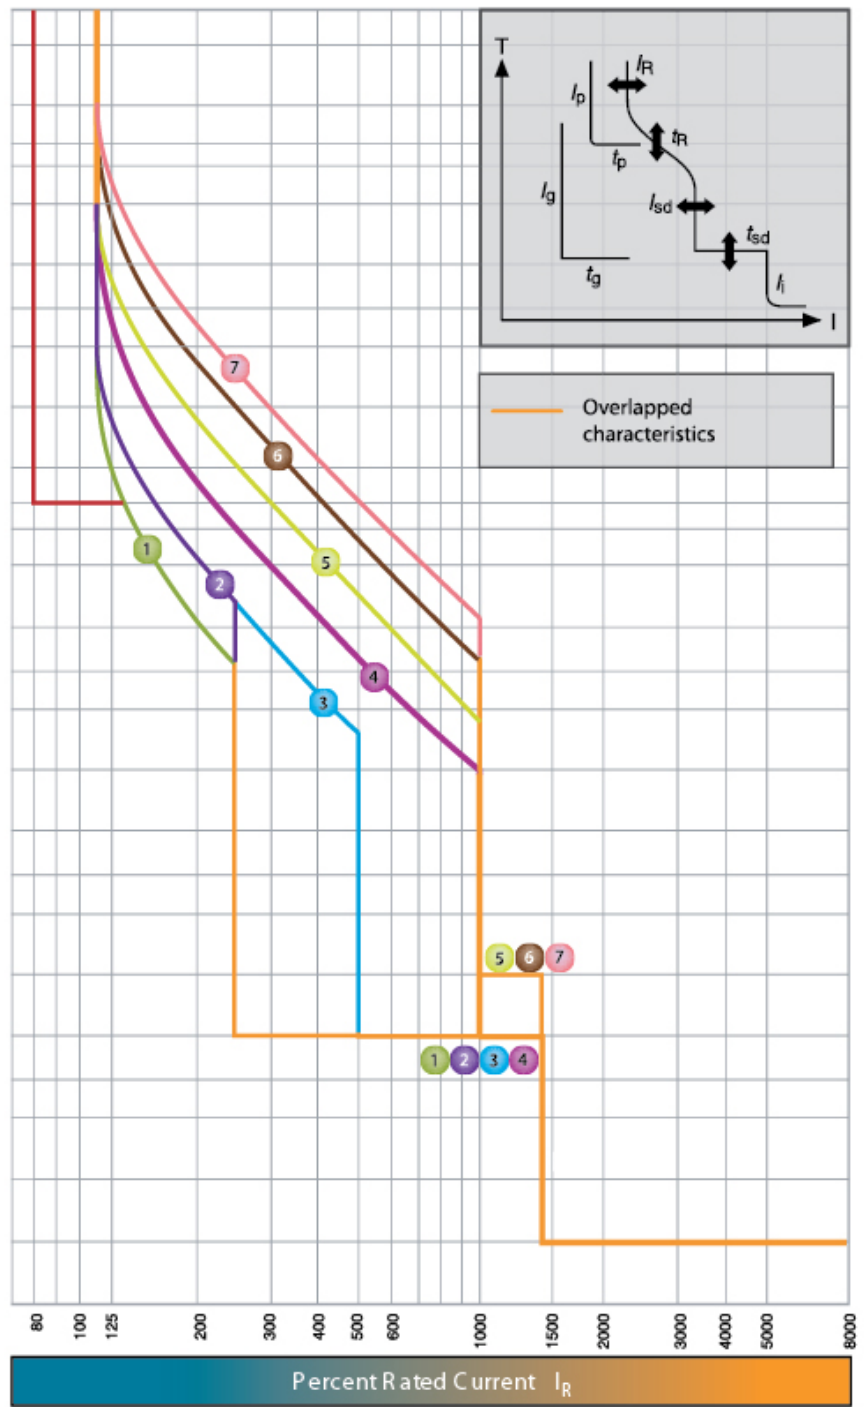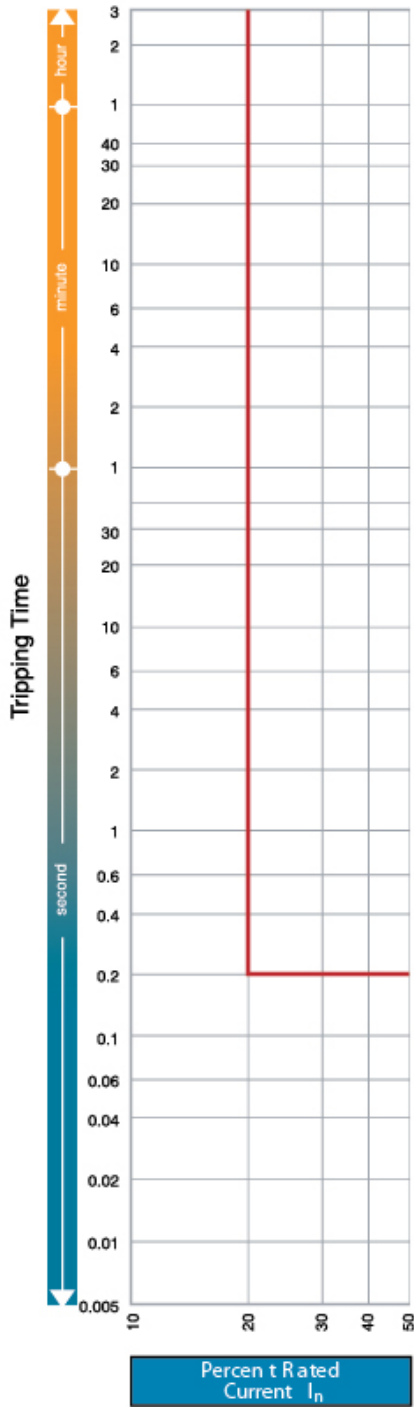

Desen cotat

Front-connected

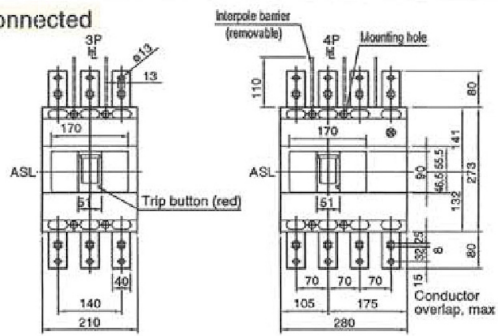

Drilling plan (front view)

