

Date tehnice pentru produs: BK080108--

Cofret aparent, 72 UH, 4 rânduri, ușă transparentă, IP40

Î=652 L=396 A=112mm



SCHRACK-Info

- Wall-mounted domestic consumer unit enclosures in ABS with transparent doors
- Lock: push-button, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection: IP40, Impact resistance: IK08
- RAL9010 pure white




Fișe tehnice

Lățime netă (mm)	395,00
Înălțime (mm)	654,00

Fișe tehnice - Continuare

Adâncime netă (mm)	112,00
Masă netă (kg.)	3,00
COD EAN	9004840875225
disipare (W)	-68,00
Temperatura minimă a mediului ambiant (°C)	-25
Temperatura maximă a mediului ambiant (°C)	60
Versiune	cu ușă pe tencuială
Rânduri	4
module / rând	18
grad de protecție	IP40

Desen dimensional: Cofret aparent, 72 UH, 4 rânduri, ușă transparentă, IP40

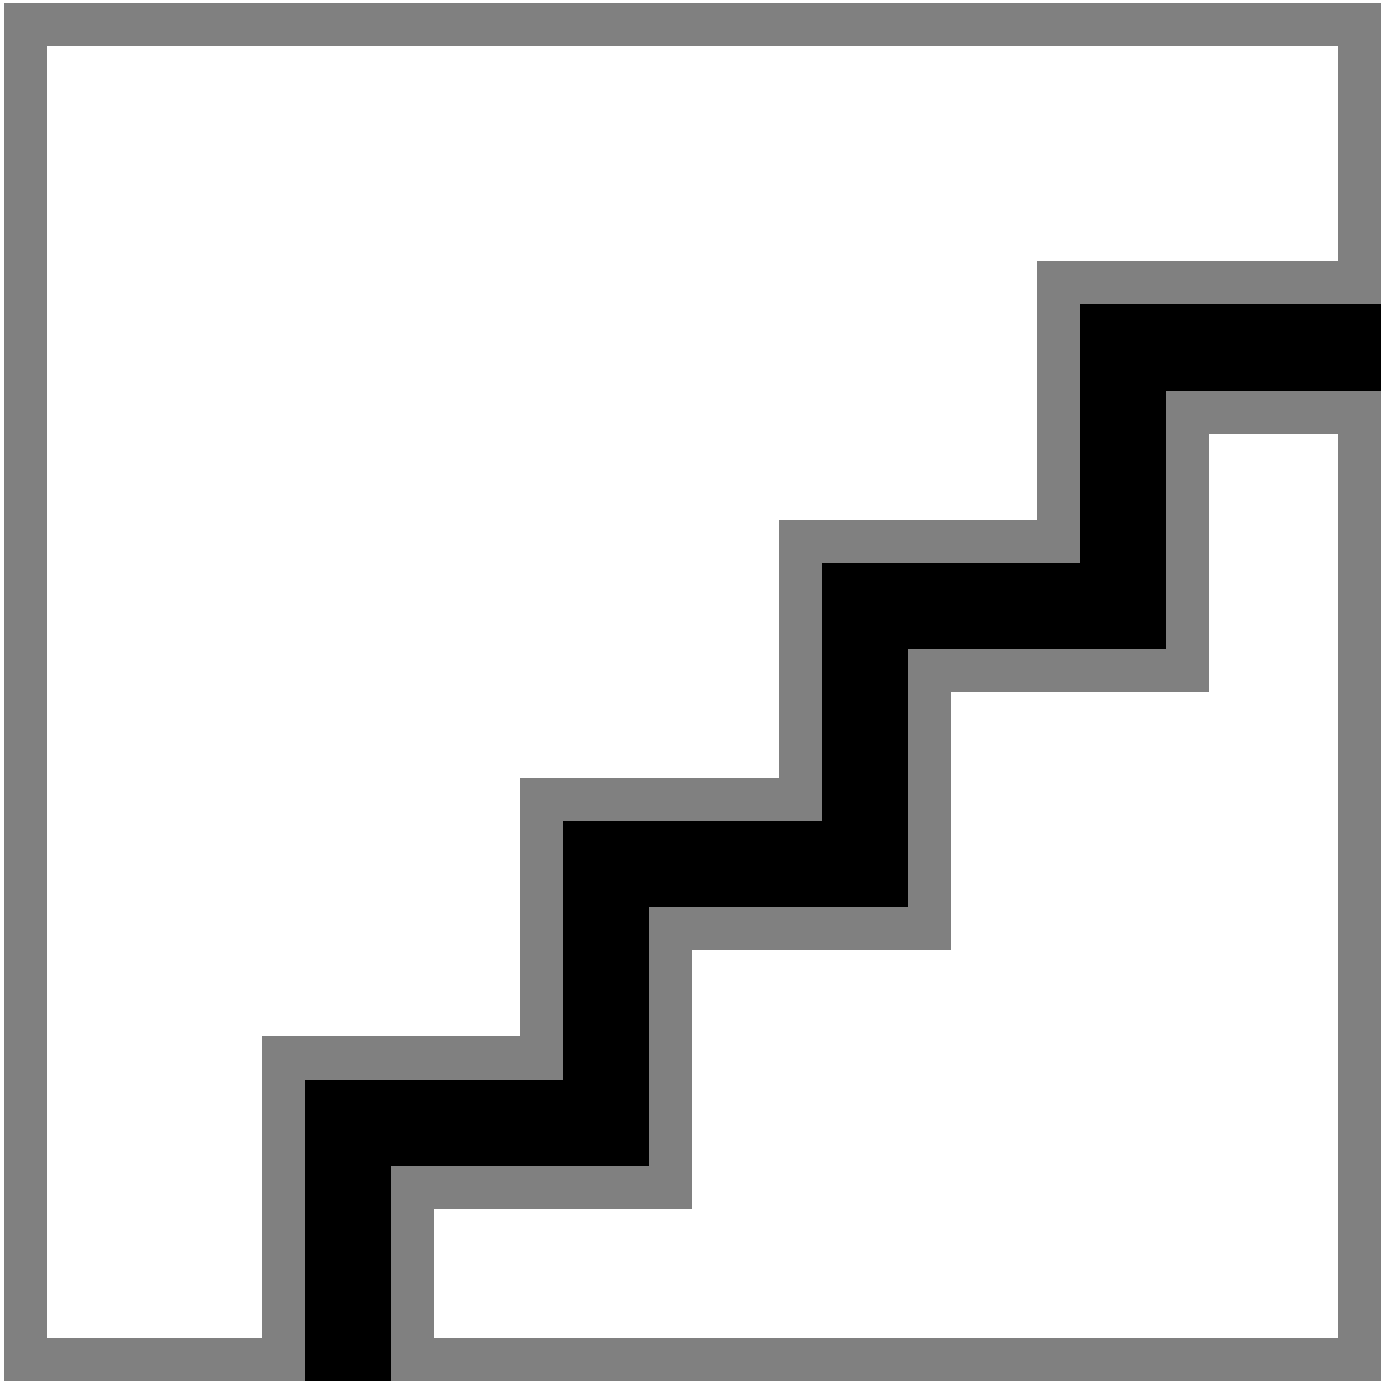

Tabel de date: Cofret aparent, 72 UH, 4 rânduri, ușă transparentă, IP40

Article number		A	B	C	D	E	Rows	MW	Radiant power loss [W]*
Door		[mm]	[mm]	[mm]	[mm]	[mm]			
Transparent	White								
BK080110	BK080160	235	143	97	127	46	1	4	-13
BK080100	BK080150	235	215	101	120	120	1	8	-18
BK080101	BK080151	235	287	112	107	180	1	12	-23
BK080104	BK080154	235	395	112	107	289	1	18	-29
BK080109	BK080159	235	502	112	107	395	1	24	-36
BK080102	BK080152	361	287	112	232	180	2	24	-32
BK080106	BK080156	361	395	112	232	289	2	36	-41
BK080103	BK080153	525	287	112	357	180	3	36	-44
BK080107	BK080157	525	395	112	357	289	3	54	-56
BK080105	BK080155	650	287	112	482	180	4	48	-54
BK080108	BK080158	654	395	112	482	289	4	72	-68

* Max. radiated power of housing calculated as a wall-mounted single fixed with $\Delta T = 35K$. Detailed information and legal notes see page 9

Tabel articole

Descriere	Cod comandă
Cofret aparent, 72 UH, 4 rânduri, ușă transparentă, IP40 Î=652 L=396 A=112mm	BK080108
Accesorii opționale	
Încuietoare cilindru metalic pentru BK08... IP40	BK080096