


Date tehnice pentru produs: BK080757--

Cofret media cu montaj pe perete pt. echip. IT, 54UH, 3r

Î=526 L=396 A=112mm, IP40, Clasa II, Material ABS, Halogen free, RAL9003, contrapanou perforat



SCHRACK-Info

- Wall-mounted Media enclosures in ABS with solid plastic doors
- Lock: push-button, a small cylinder can be installed
- includes perforated Mounting Plate
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection: IP40, Impact resistance: IK08
- RAL9003 signal white



Fișe tehnice

Lățime netă (mm)	396,00
------------------	--------

Fișe tehnice - Continuare

Înălțime (mm)	526,00
Adâncime netă (mm)	112,00
Masă netă (kg.)	2,60
COD EAN	9004840890013
disipare (W)	-56,00
Temperatura minimă a mediului ambiant (°C)	-25
Temperatura maximă a mediului ambiant (°C)	60


Tabel de date: Cofret media cu montaj pe perete pt. echip. IT, 54UH, 3r

Artikelnummer	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	Verlustleistung [W]*
BK080752	361	287	112	232	180	-32
BK080753	485	287	112	357	180	-41
BK080755	653	287	112	460	158	-54
BK080756	361	396	112	210	267	-41
BK080757	526	396	112	335	267	-56
BK080758	655	396	112	460	267	-68

* Max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandanbau und einem $\Delta T = 35K$.

Detailinformationen und Rechtshinweise siehe Seite ?

Desen dimensional: Cofret media cu montaj pe perete pt. echip. IT, 54UH, 3r

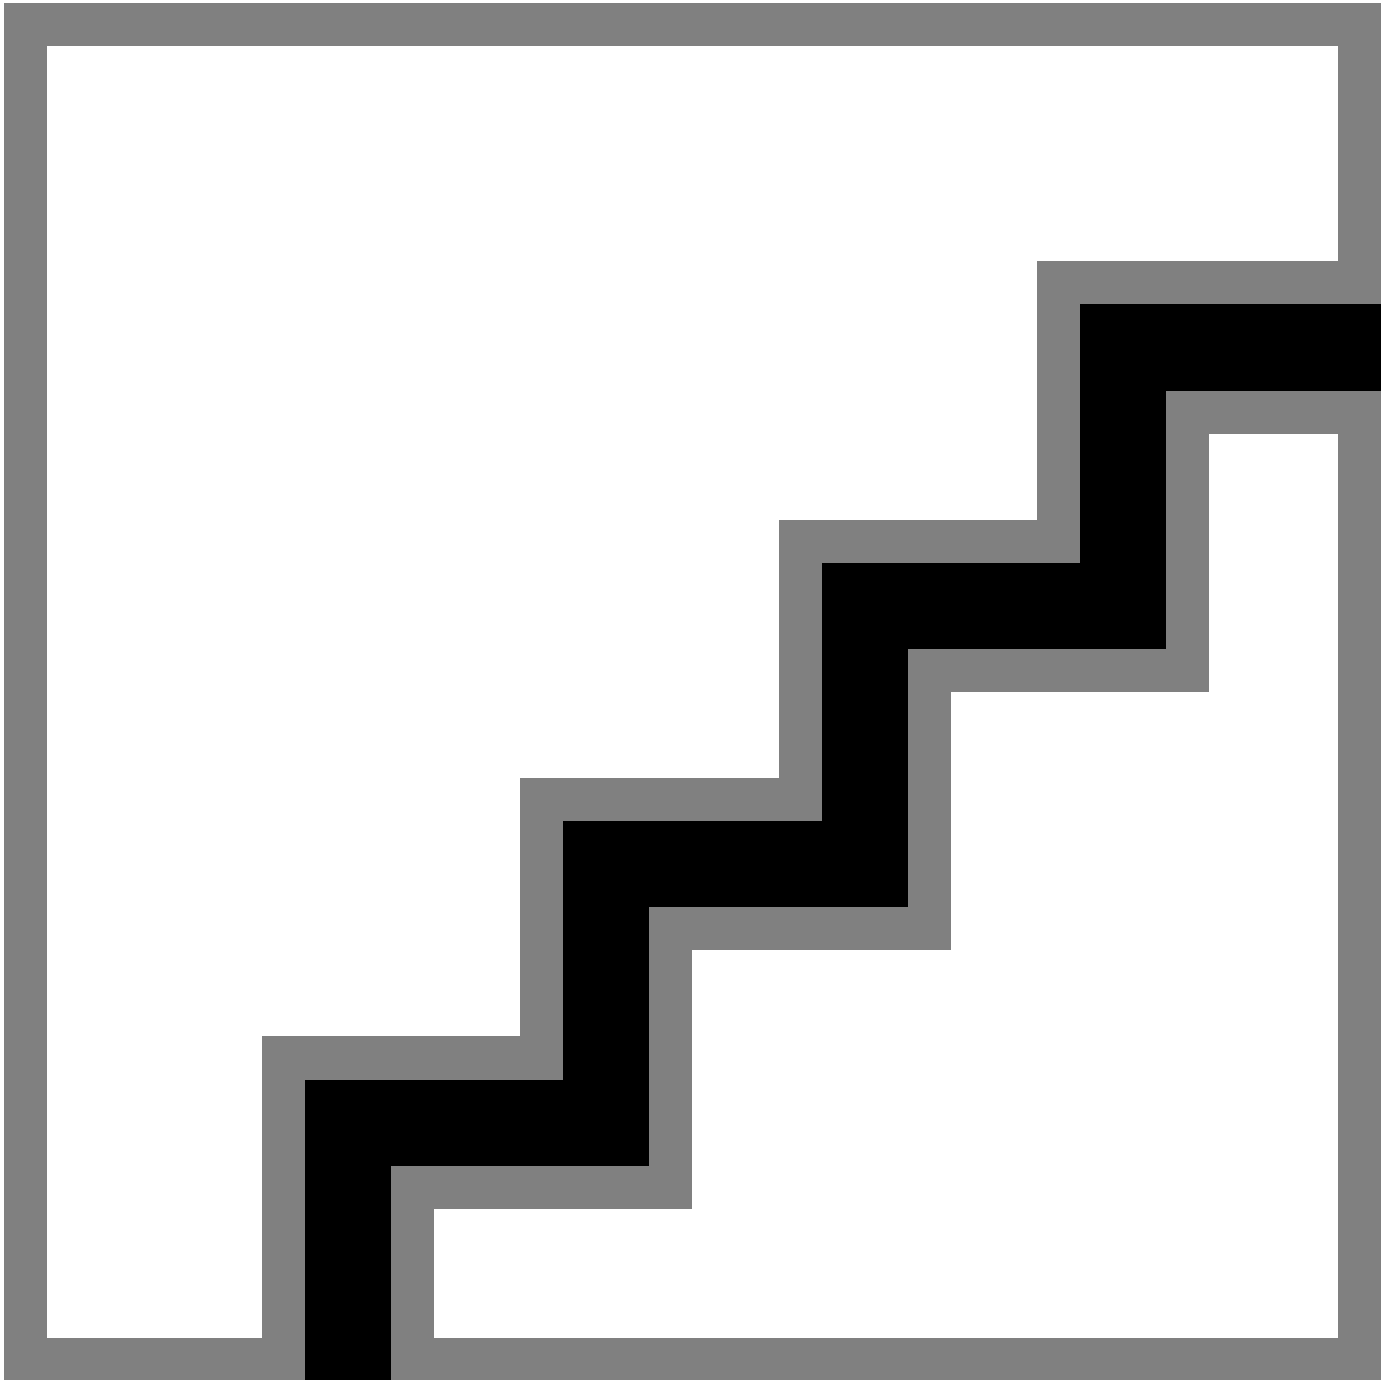

Tabel articole

Descriere	NVP (%)	Greutate cupru (kg/km)	Cod comandă
Cofret media cu montaj pe perete pt. echip. IT, 54UH, 3r Î=526 L=396 A=112mm, IP40, Clasa II, Material ABS, Halogen free, RAL9003, contrapanou perforat			BK080757
Accesorii opționale			
Suport cleme șir 2x15			BK080098
Încuietoare cilindru metalic pentru BK08... IP40			BK080096
Set prize duble 16A, 250V c.a., cu sistem de montaj pentru carcase media BK0857, carcase combinate media BK0855 (verticală) și carcase combinate media BK0856 (orizontală)			BK085050
Patchpanel TOOLLESS LINE, neechipat, 1 modul, montaj pe șină			HSERH010GS
Modul RJ45 ecranat, Cat.6a, ISO/IEC 11801 AMD2 TOOLLESS LINE			HSEMRJ6GWA
Cablu S/FTP Cat.7, 4x2xAWG23/1, 1.000Mhz,LSOH,Dca,40%,albastr ATENȚIE! Pentru diverse lungimi sau secțiuni se poate percepe taxă de debitare! În cazul unei comenzi va rugăm sa luați legătura cu inginerul de vânzări alocat.	78	28	HSEKP423HB
Suport cleme șir 2x8			BK080097