

Date tehnice pentru produs: DTWN075440

# Dulap de perete DTW, 7U H=370 x W=540 x D=400, 19"

ATENȚIE !!! - expedierea acestor produse prin curier se face doar pe răspunderea clientului, există riscul deteriorării sale în timpul transportului.



## SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof.

- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
  - Top and bottom chassis: 0.8mm
  - Rails: 1.5mm
  - Front door (glass): 4.0mm
  - Rear panel: 1.2mm
  - Side panel: 0.8mm
- **Colour:**
  - RAL7035 (light grey)
- **Heights:** 7, 9 and 12U
- **Maximum load:** with even distribution: 80kg
- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left-hinged possible. Opening angle of the door: approx. 200°.


- **Rails:** 19" rails (2 pieces) in the front of the cabinet, galvanised, depth-adjustable
- **Cable entry options:** in roof and floor
  - The floor is provided with a plastic blank cover.
  - The roof is equipped with a brush entry.
- **Cooling:**
  - Passive cooling through ventilation slots and heat exchange with the outside area.
  - Active cooling by optional DTLT fans
- **Accessories:** Numerous accessories available (shelves, PDUs, cable management, blank panels, fan units, etc.)
- **Delivery:** Enclosure is completely assembled. Mounting material optionally available (DTSRA0x0)




## Fișe tehnice

Lățime netă (mm)	540,00
Înălțime (mm)	370,00
Adâncime netă (mm)	400,00
Masă netă (kg.)	9,80
COD EAN	9004840868937
Temperatura minimă a mediului ambiant (°C)	5
Temperatura maximă a mediului ambiant (°C)	40
UV	7
Culoare	Gri deschis
grad de protecție	IP20
Încărcare maximă (kg.)	80
Serie	S-RACK


## Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=400, 19"

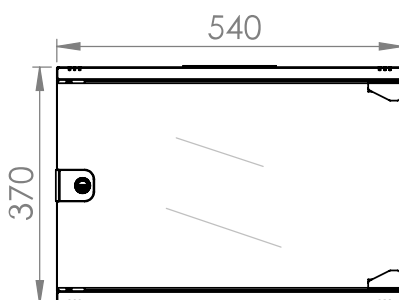

Front view

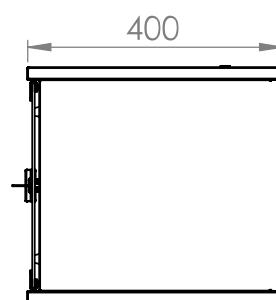


Side view

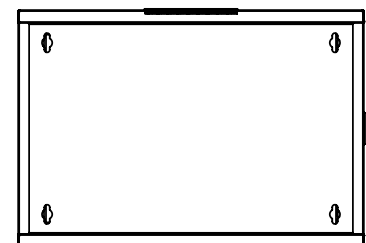


Rear view

**Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=400, 19"**

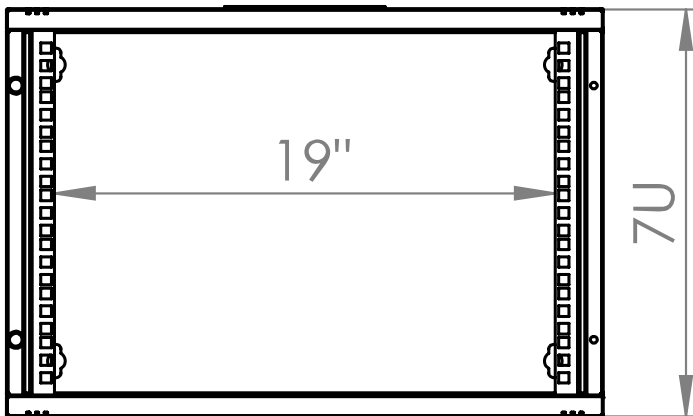


Front inside view

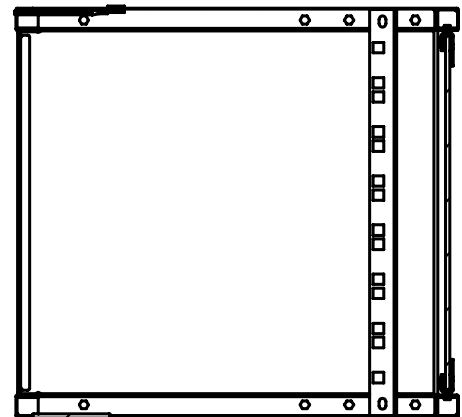


Side inside view

**Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=400, 19"**

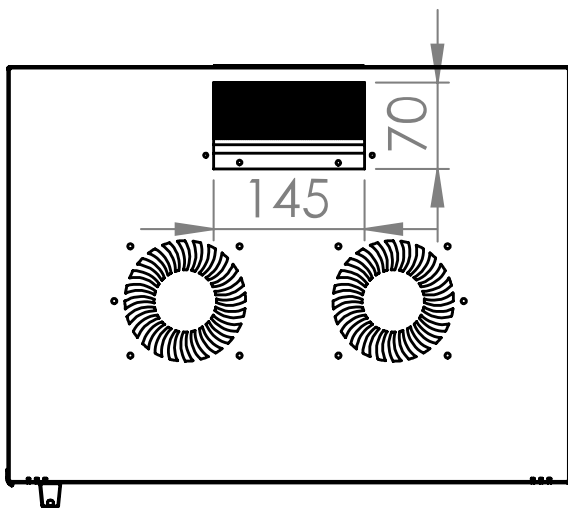


Top view

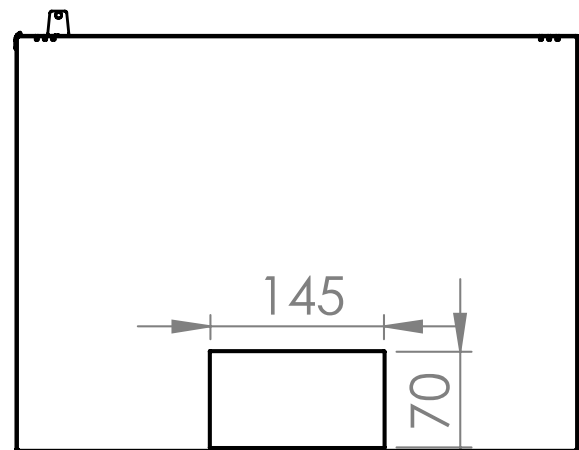


Bottom view

Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=400, 19"

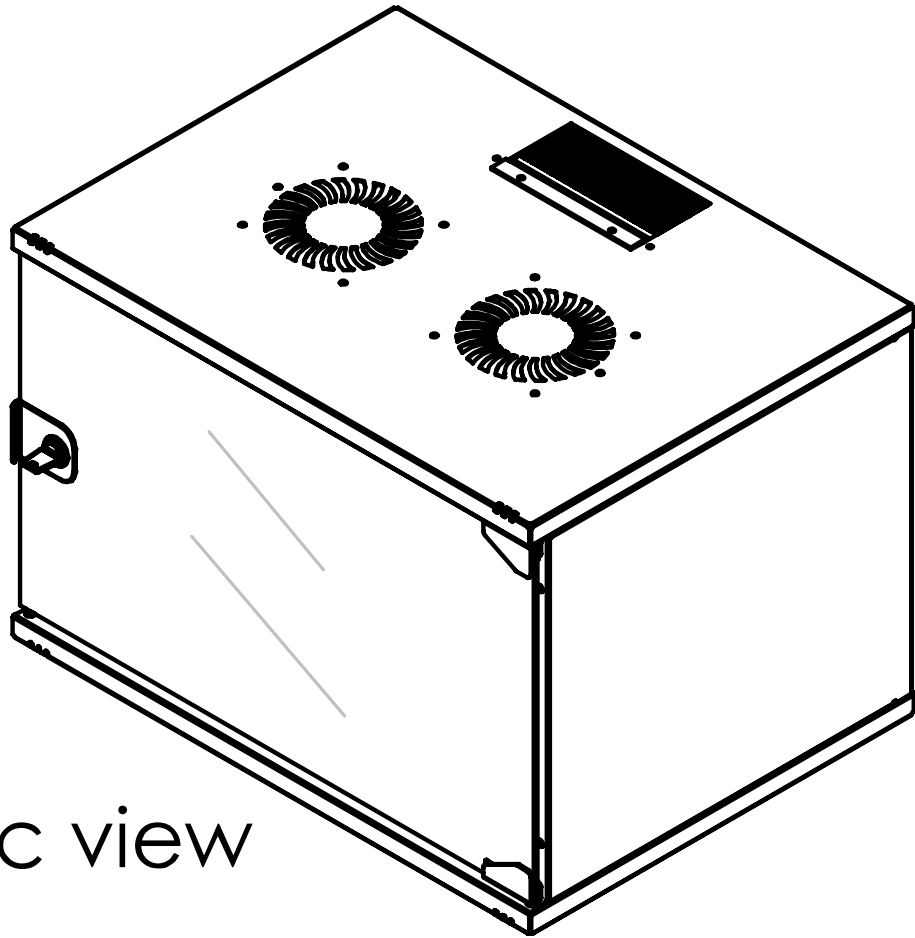

Isometric view

**Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=400, 19"**

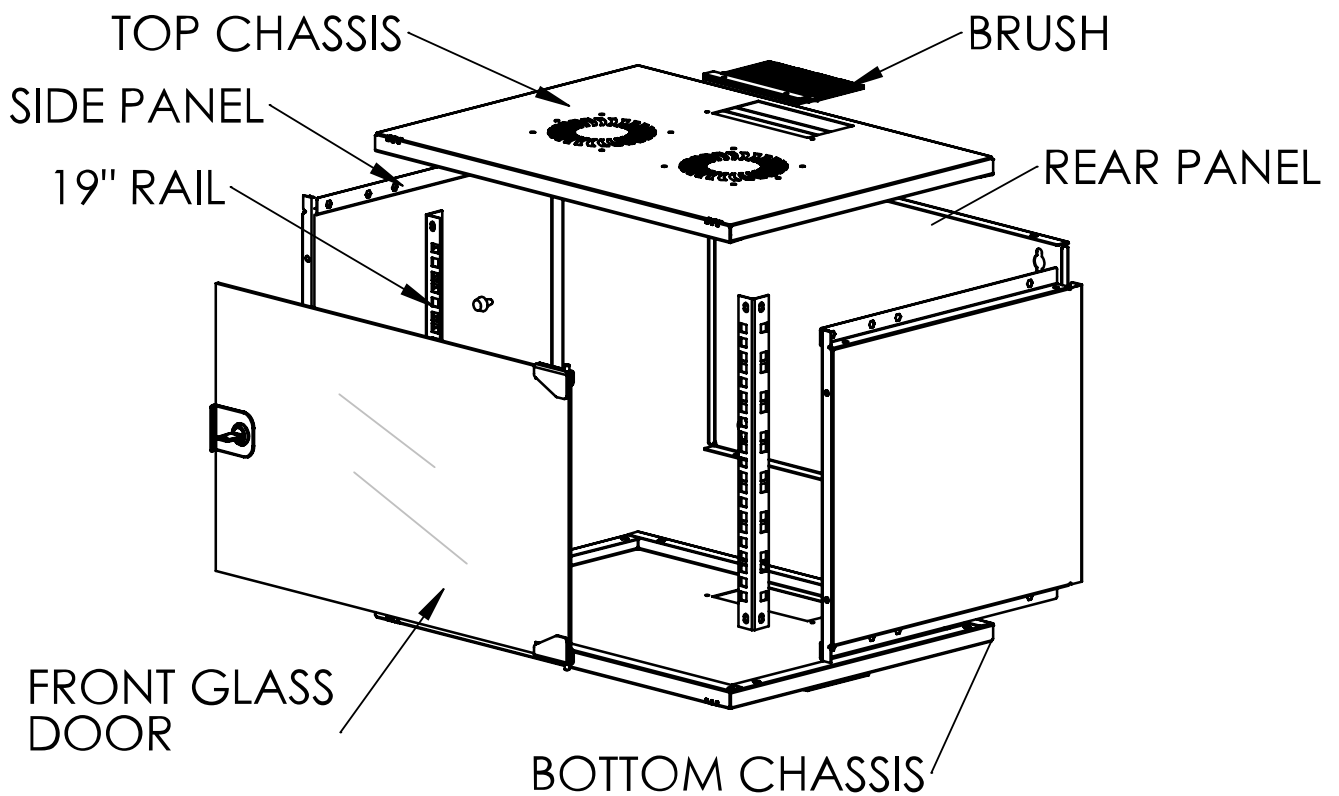

Exploded view

## Tabel articole

Descriere	Cod comandă
Dulap de perete DTW, 7U H=370 x W=540 x D=400, 19"	
ATENȚIE !!! - expedierea acestor produse prin curier se face doar pe răspunderea clientului, există riscul deteriorării sale în timpul transportului.	DTWN075440
<b>Accesorii opționale</b>	
Unitate de tavan cu 2 ventilatoare, DT/DTW, termostat analog gri deschis, instalare din exterior	DTLTR02A
Unitate de tavan cu 2 ventilatoare, DT/DTW, comutator ON/OFF gri deschis, instalare din exterior	DTLTR02S
Unitate de tavan cu 1 ventilator, DT/DTW, termostat analogic gri deschis, instalare din exterior	DTLTR01A
Unitate de tavan cu 1 ventilator, DT/DTW, comutator ON/OFF gri deschis, instalare din exterior	DTLTR01S
Tavă fixă, 1U, sarcină 30 Kg, D=300mm, fixare în 2 puncte montaj 2 puncte	DTFT1300
Patchpanel pt. 24 module TOOLLESS LINE, 1UH, 19", RAL7035	HSER0240GS
Organizator 19" 1U, 5 inele metalice, RAL7035	DTBC105R
Set fixare profil 19" (20buc. Șurub+piuliță+șaiabă)	DTSRA020
Switch 24xRJ45 10/100/1000, silențios, f.vent., alim.intern Carcasă metalică, 19"	QLGSW2457
PDU 19", 9xSchuko, profil ALU 1U, cablu conexiune 2m, RAL7035	IU070114
PDU 19", 7xSchuko+prot suprat, prof PVC 1,25U, cabl 2m, RAL7035	IU070113
PDU 9x Schuko, 19", 1U, cablu 2m, comutator on/off negru, ALU ALU Profil	Q7070114-A
PDU 19", 7xSchuko, Comutator, protecție supratensiune, 1U cablu 2m, negru	Q7070113-A