

# CEM112E.22-130V-AC/DC



## Specificatii

|                                |                          |
|--------------------------------|--------------------------|
| Cod ETI                        | 004646019                |
| Descriere                      | CEM112E.22-130V-AC/DC    |
| Denumire clasă                 | Contactorul motorului    |
| Func ie                        | Contactor pentru motoare |
| I (AC1) (A)                    | 180                      |
| I (AC3 400V) (A)               | 112                      |
| P (AC3 kW) (kW)                | 55                       |
| Număr de contacte auxiliare NC | 2                        |
| Număr de poli                  | 3                        |
| Tensiunea nominala (V AC)      | 1000                     |
| Tensiunea de control Uc (V AC) | 130                      |
| Tensiunea de control Uc (V DC) | 130                      |

Pagina de produse online [🔗](#)

## Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni

Declaratie CE



Eplan mușchi

## ETIM clasificare internationala

|   |                               |
|---|-------------------------------|
| Clasificare   | EC000066                      |
| Denumire clasă  | Power contactor, AC switching |
| Rated control supply voltage AC 50 Hz                   | 110...130V                    |
| Rated control supply voltage DC                         | 130...130V                    |
| Voltage type for actuating                              | AC/DC                         |
| Rated operation current I <sub>e</sub> at AC-1, 400 V   | 180A                          |
| Rated operation current I <sub>e</sub> at AC-3, 400 V   | 112A                          |
| Rated operation power at AC-3, 400 V                    | 55kW                          |
| Modular version   |                               |
| Number of auxiliary contacts as normally open contact   | 2                             |
| Number of auxiliary contacts as normally closed contact | 2                             |
| Type of electrical connection of main circuit           | Rail connection               |
| Number of normally open contacts as main contact        | 3                             |

# Desen cotat

CEM112(E)  
 CEM150E

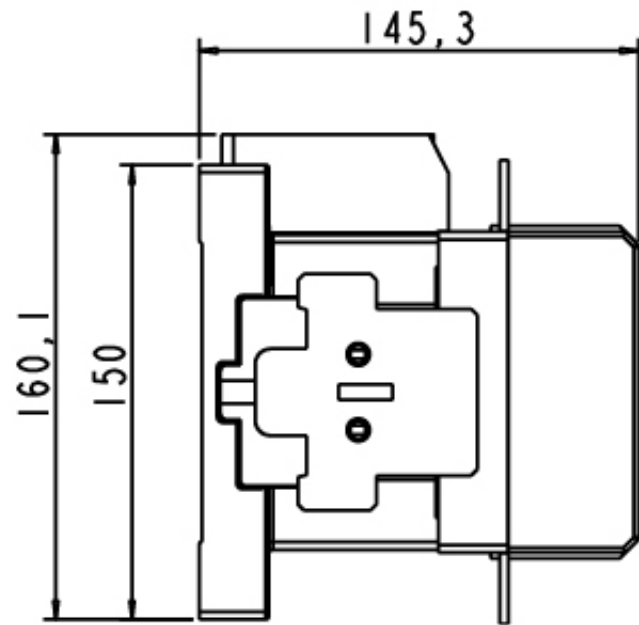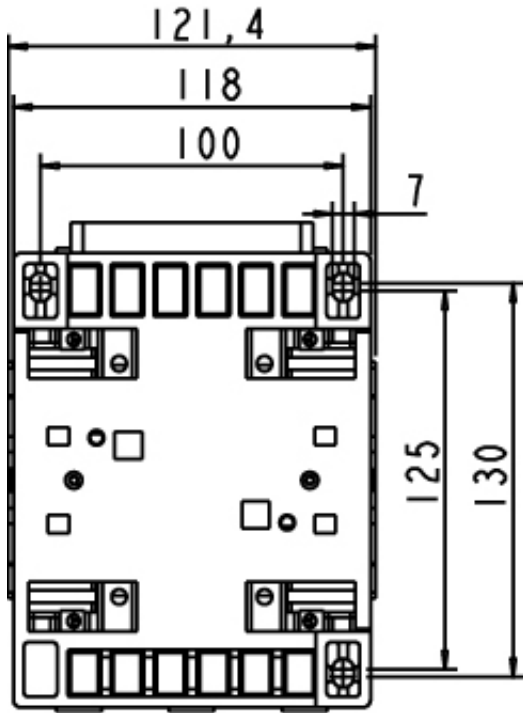

## Schema de conexiuni

