

# CEM40.00-48V-50/60Hz



## Specificatii

Cod ETI	004647101
Descriere	CEM40.00-48V-50/60Hz
Denumire clasă	Contactorul motorului
Funcție	Contactor pentru motoare
I (AC1) (A)	60
I (AC3 400V) (A)	40
P (AC3 kW) (kW)	18,5
Număr de poli	3
Număr de contacte auxiliare NO	0
Tensiunea nominală (V AC)	690
Tensiunea de control U <sub>c</sub> (V AC)	48

[Pagina de produse online](#) 

## Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)

[Declaratie CE](#)


[Eplan mușchi](#)

## ETIM clasificare internationala

Clasificare	EC000066
Denumire clasă	Power contactor, AC switching
Rated control supply voltage AC 50 Hz	48...48V
Rated control supply voltage AC 60 Hz	48...48V
Rated control supply voltage DC	48...48V
Voltage type for actuating	AC
Rated operation current I <sub>e</sub> at AC-1, 400 V	60A
Rated operation current I <sub>e</sub> at AC-3, 400 V	40A
Rated operation power at AC-3, 400 V	18,5kW
Modular version	
Type of electrical connection of main circuit	Frame clamp
Number of normally open contacts as main contact	3

## Desen cotat

	AC	DC
CEM32	A=98	A=134
CEM40	A=98	A=134

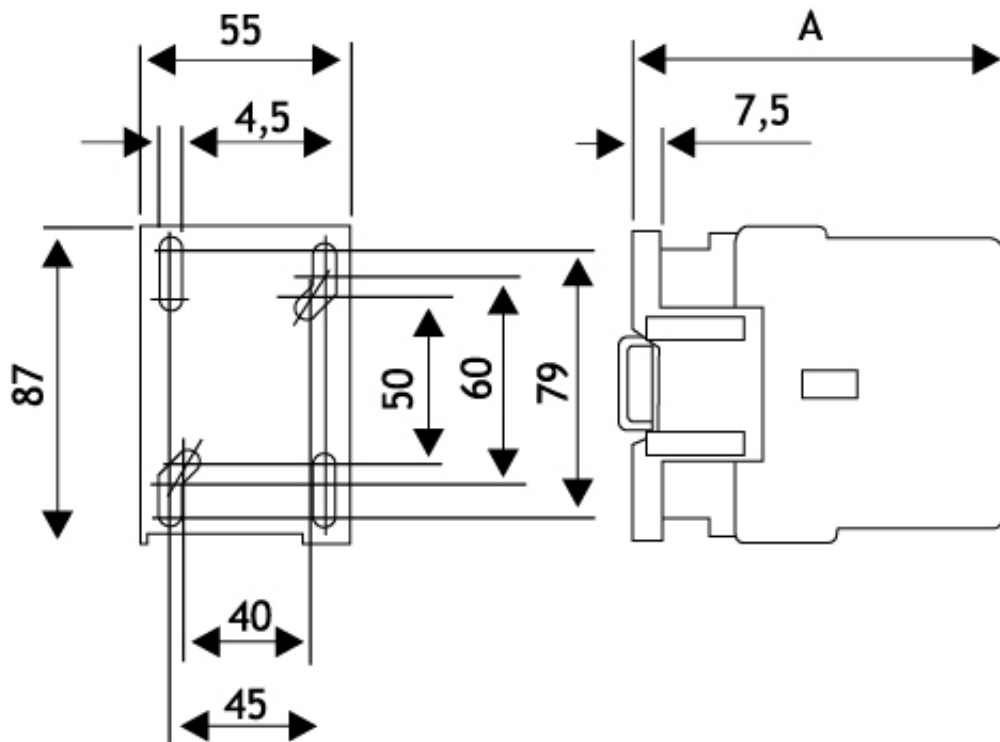

## Schema de conexiuni

