

# CEM50.00-400V-50/60Hz



## Specificatii

Cod ETI	004648104
Descriere	CEM50.00-400V-50/60Hz
Denumire clasă	Contactorul motorului
Func ie	Contactor pentru motoare
I (AC1) (A)	80
I (AC3 400V) (A)	50
P (AC3 kW) (kW)	22
Număr de poli	3
Număr de contacte auxiliare NO	0
Tensiunea nominala (V AC)	1000
Tensiunea de control Uc (V AC)	400

Pagina de produse online [🔗](#)

## Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni

Declaratie CE


Eplan mușchi

## ETIM clasificare internationala

Clasificare	EC000066
Denumire clasă	Power contactor, AC switching
Rated control supply voltage AC 50 Hz	400...400V
Rated control supply voltage AC 60 Hz	400...400V
Rated control supply voltage DC	400...400V
Voltage type for actuating	AC
Rated operation current I <sub>e</sub> at AC-1, 400 V	80A
Rated operation current I <sub>e</sub> at AC-3, 400 V	50A
Rated operation power at AC-3, 400 V	22kW
Modular version	
Type of electrical connection of main circuit	Frame clamp
Number of normally open contacts as main contact	3

## Desen cotat

	AC/DC
CEM50	A=116
CEM65	A=116
CEM80	A=116

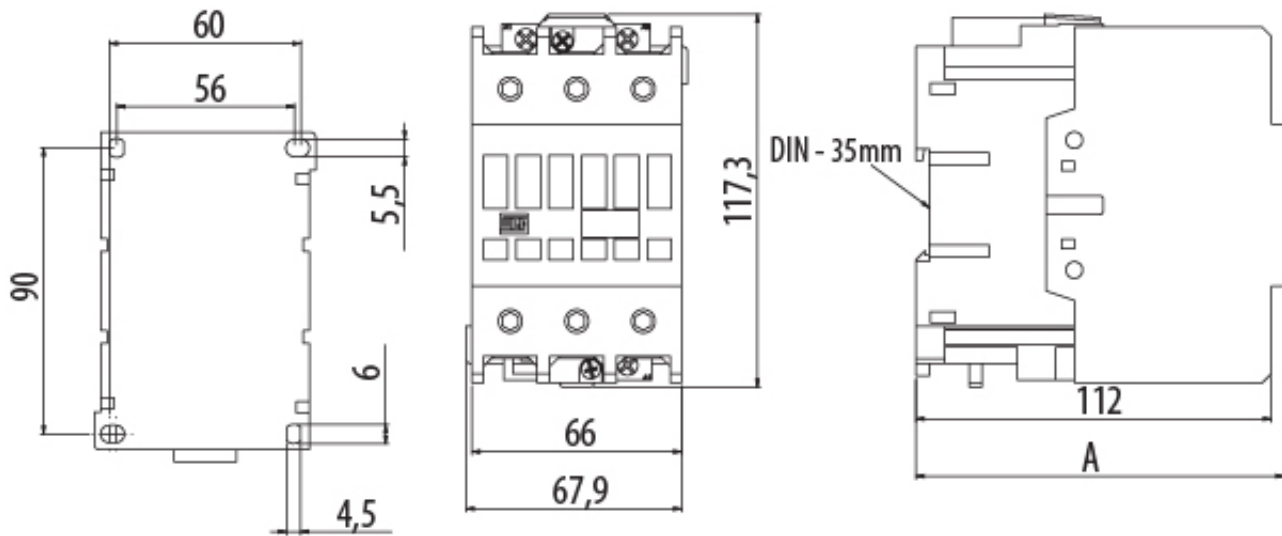

## Schema de conexiuni

