

ETIMAT P10 3p C13



Specificatii

Cod ETI	001901329
Descriere	ETIMAT P10 3p C13
Denumire clasă	Întreprător de circuit
Func ie	MCB
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	C
Curent nominal (A)	13
Tensiunea nominală(V)	415
Număr de poli	3
Frecven ă nominală (Hz)	50/60
Standarde	EN/IEC 60898
Sec iune transversală nominală	1-25
Tipul voltajului	AC
Tensiunea nominala de rezistenta Uimp (kV)	6kV

Pagina de produse online

Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni


Declaratie CE

Eplan mușchi



ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	C
Number of poles (total)	3
Number of protected poles	3
Rated current	13A
Rated voltage	415V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	10kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	10kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	3
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Caracteristicile energiei de topire

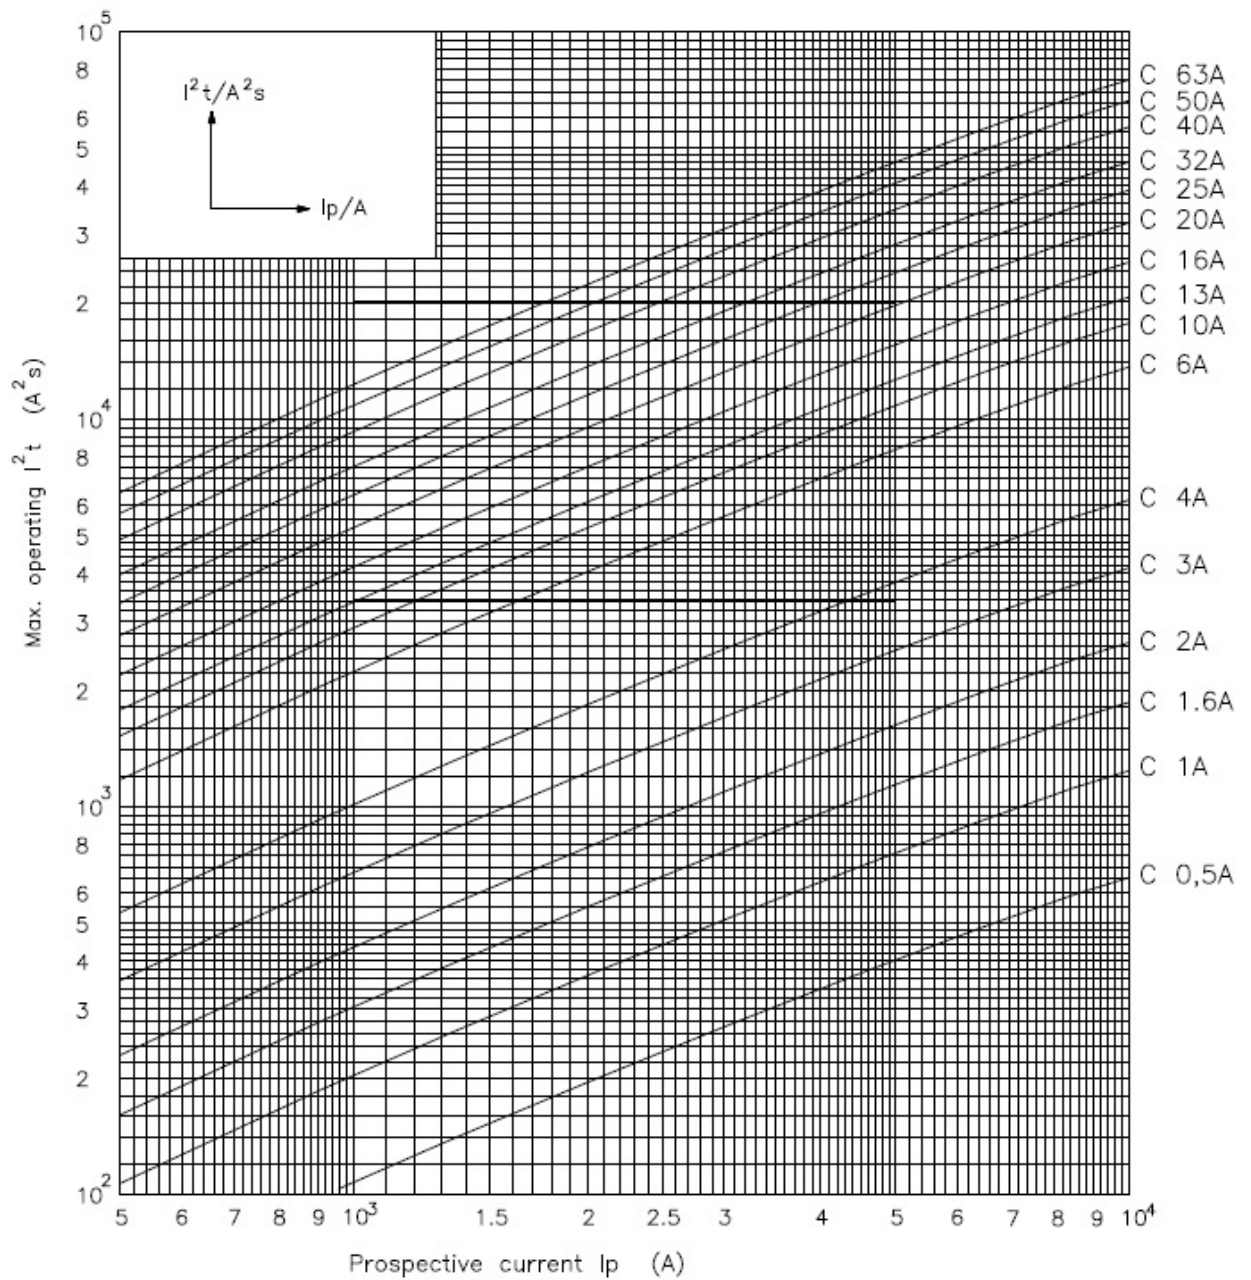

Caracteristici

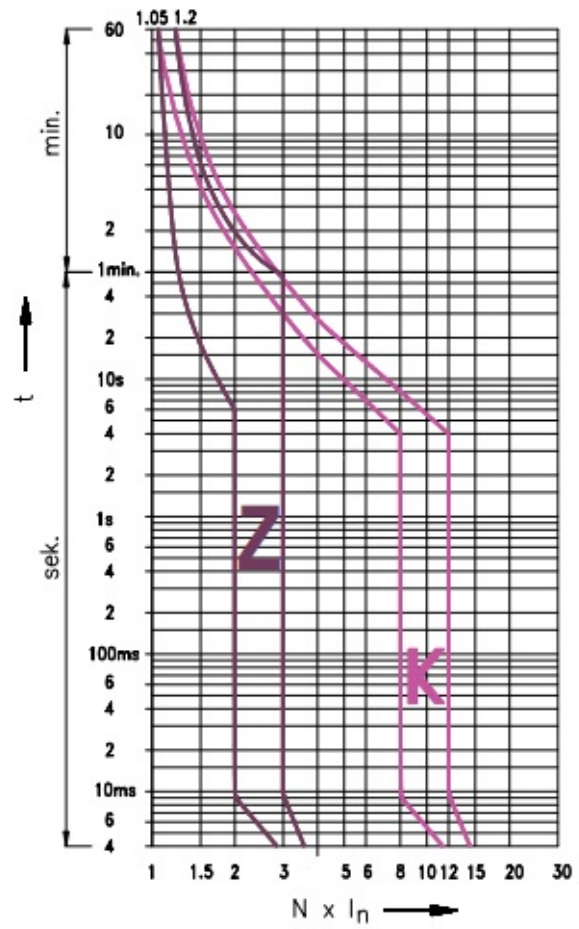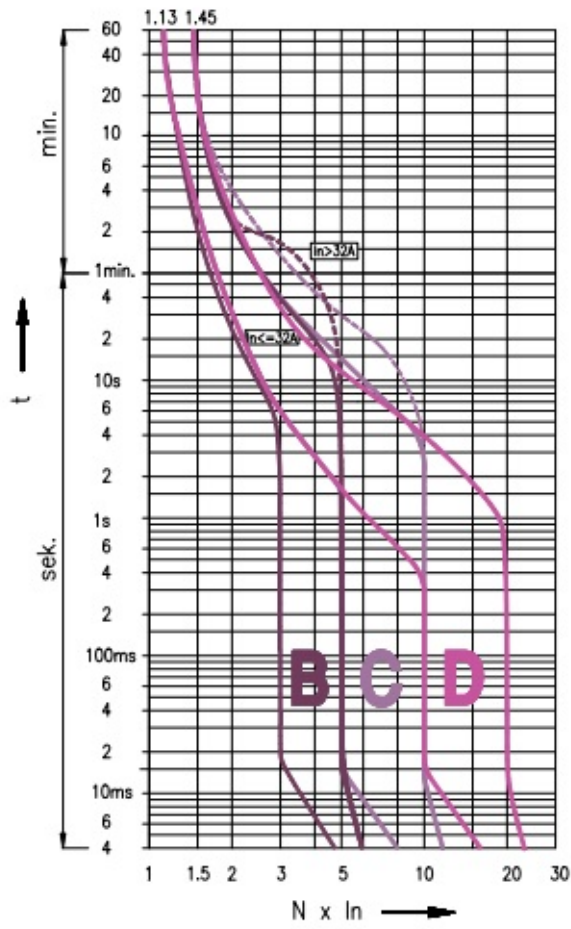

Desen cotat



Simbol/Conexiune

1p



1p+n



2p



3p



3p+n

