

ETIMAT P10 3p+N C13



Specificatii

Cod ETI	001901429
Descriere	ETIMAT P10 3p+N C13
Denumire clasă	Înterupător de circuit
Funcție	MCB
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	C
Curent nominal (A)	13
Tensiunea nominală(V)	415
Număr de poli	3+N
Frecvență nominală (Hz)	50/60
Standarde	EN/IEC 60898
Secțiune transversală nominală	1-25
Tipul voltajului	AC
Tensiunea nominală de rezistență Uimp (kV)	6kV

[Pagina de produse online](#) 

Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)


[Declaratie CE](#)

[Eplan mușchi](#)

ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	C
Number of poles (total)	4
Number of protected poles	3
Rated current	13A
Rated voltage	415V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	10kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	10kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	4
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Caracteristicile energiei de topire

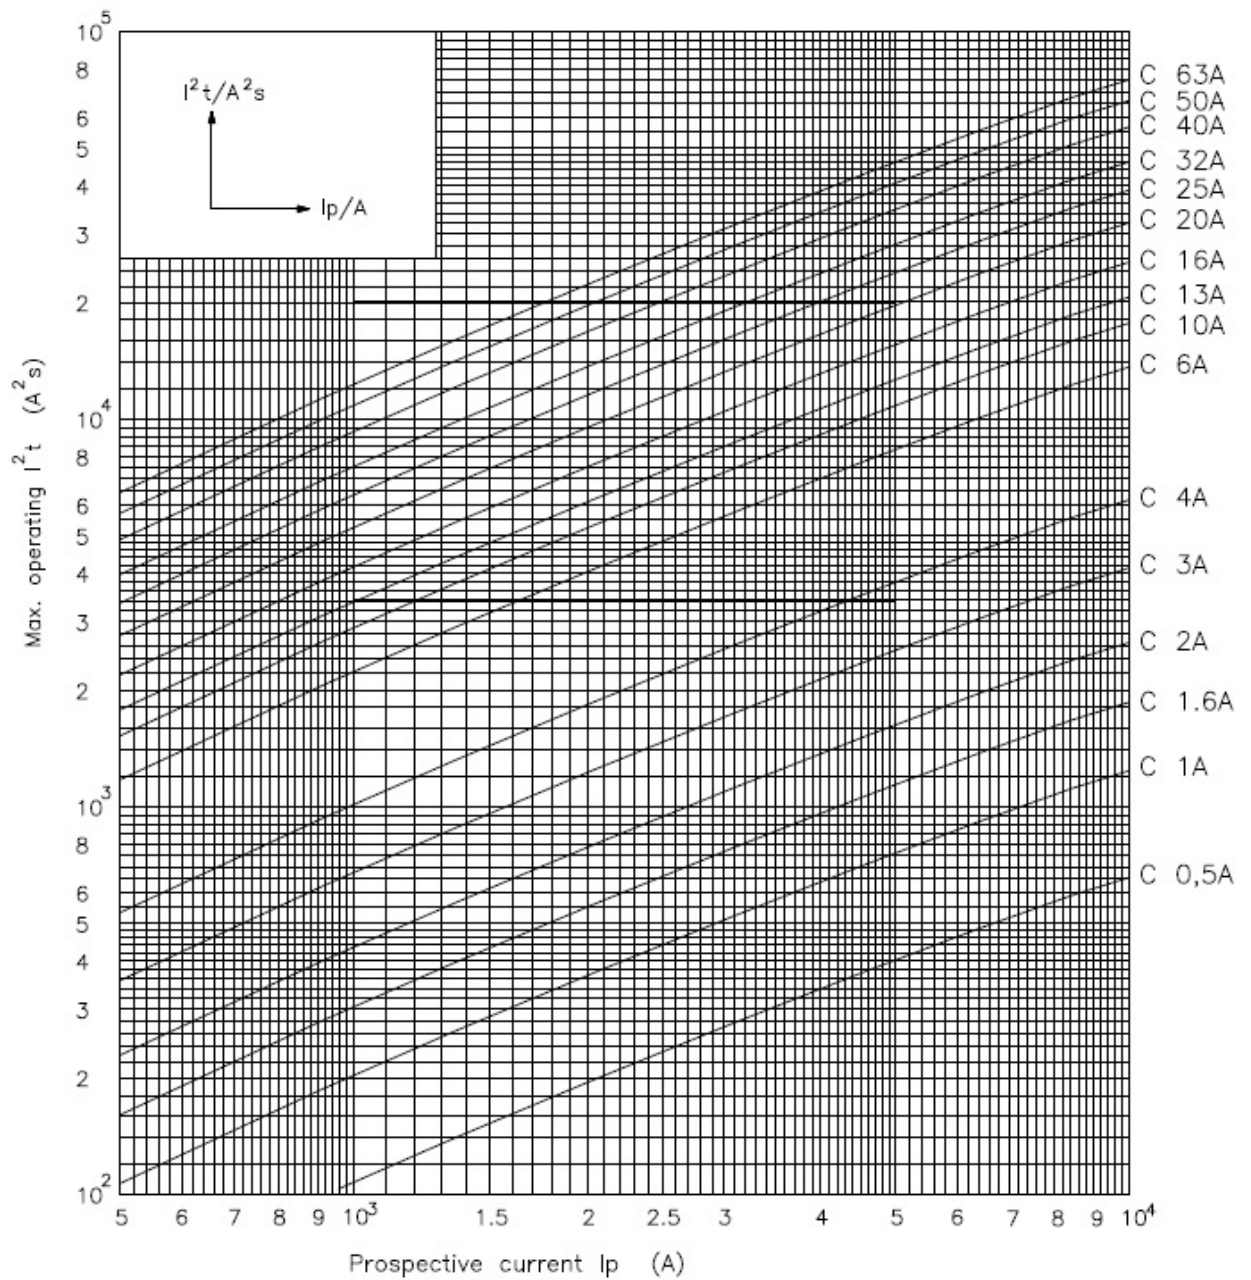

Caracteristici



Desen cotat



Simbol/Conexiune

1p



1p+n



2p



3p



3p+n

