

ETIMAT P10-DC 2p B13



Specificatii

Cod ETI	001903209
Descriere	ETIMAT P10-DC 2p B13
Denumire clasă	Înterupător de circuit
Funcție	MCB
Capacitatea de rupere (kA)	10
Caracteristică de întrerupere	B
Curent nominal (A)	13
Tensiunea nominală(V)	440
Număr de poli	2
Frecvență nominală (Hz)	1...25
Standarde	60898-2
Secțiune transversală nominală	1...25
Tipul voltajului	DC
Tensiunea nominală de rezistență Uimp (kV)	6

[Pagina de produse online](#) 

Alta documentatie





[Model 3D](#)
[Manual de instructiuni](#)
[Declaratie CE](#)
[Eplan mușchi](#)

ETIM clasificare internațională

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	2
Number of protected poles	2
Rated current	13A
Rated voltage	440V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	10kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	10kA
Voltage type	DC
Frequency	1...25Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	2
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Caracteristici

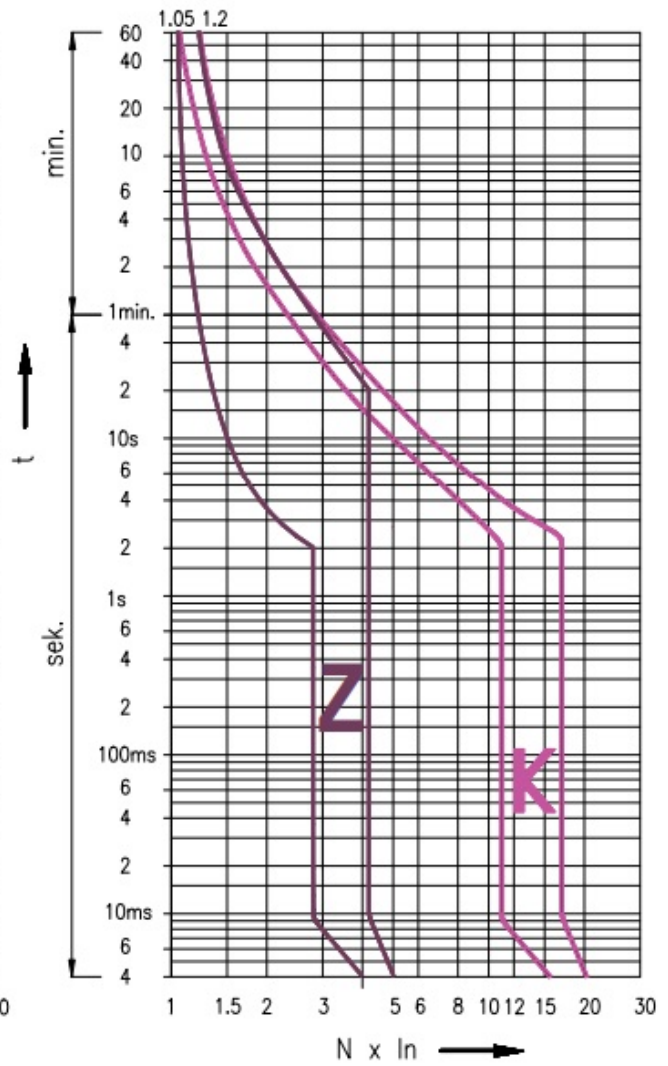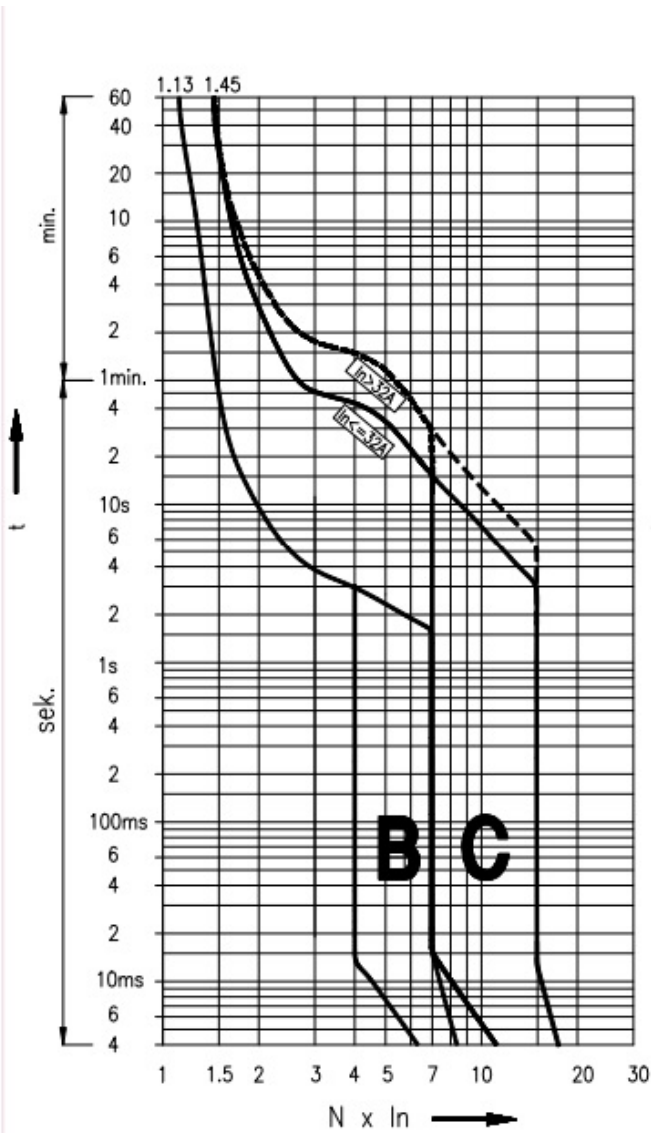

Desen cotat



Simbol/Conexiune

