

## KZS-4M 3p+N A C13/0.5



### Specificatii

Cod ETI	002174623
Descriere	KZS-4M 3p+N A C13/0.5
Denumire clasă	Diferențial RCBO
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	C
Curent nominal (A)	13
Tip	A
Curent de defect nominal (A)	0.5
Tip curent	A
Tensiunea nominală(V)	415
Număr de poli	3+N
Frecvență nominală (Hz)	50/60 Hz
Standarde	IEC/EN 61009
Secțiune transversală nominală	1-25

[Pagina de produse online](#)

### Alta documentatie



[Catalog caracteristici tehnice](#)

[CertIFICATE](#)

[Model 3D](#)

[Manual de instructiuni](#)



[Declaratie CE](#)

[Eplan mușchi](#)

## ETIM clasificare internațională

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	4
Number of protected poles	3
Rated voltage	400V
Rated current	13A
Rated fault current	0,5A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	6kA
Frequency	50/60 Hz
Release characteristic	C
Concurrently switching neutral conductor	1
Width in number of modular spacings	4
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm <sup>2</sup>
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>

## Desen cotat

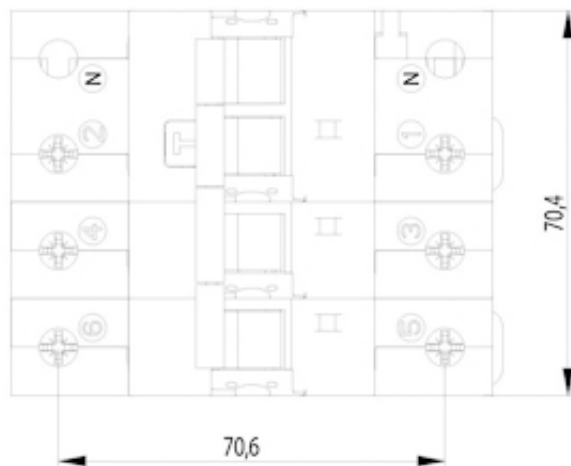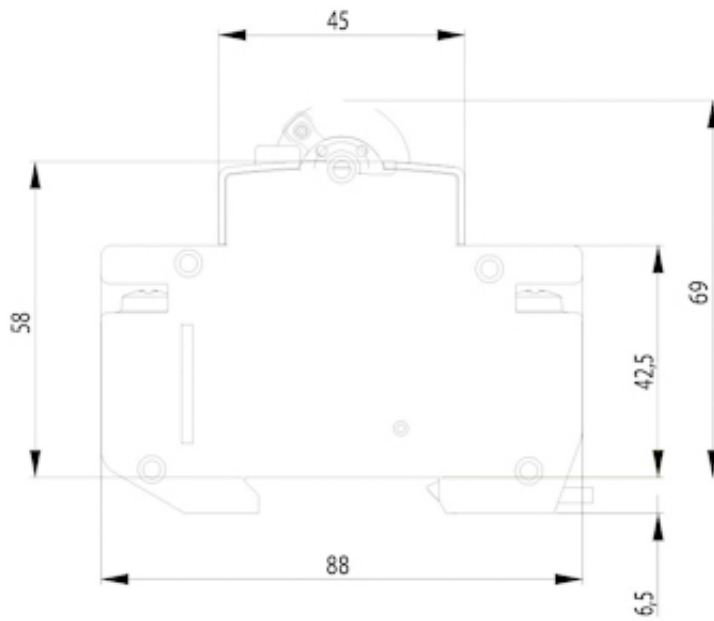

## Simbol/Conexiune

