

# KZS-1M-UNI 1p+N A B16/0.03



## Specificatii

Cod ETI	002176024
Descriere	KZS-1M-UNI 1p+N A B16/0.03
Denumire clasă	Diferențial RCBO
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	B
Curent nominal (A)	16
Tip	A
Curent de defect nominal (A)	0.03
Tip curent	A
Tensiunea nominală(V)	240
Număr de poli	1+N
Frecvență nominală (Hz)	50/60
Standarde	EN/IEC 61009-1
Seciune transversală nominală	1...10

[Pagina de produse online](#)

## Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)


[Declaratie CE](#)

[Eplan mușchi](#)


## ETIM clasificare internațională

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Rated voltage	240V
Rated insulation voltage $U_i$	250V
Rated impulse withstand voltage $U_{imp}$	4kV
Rated current	16A
Rated fault current	0,03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	6kA
Rated short-circuit breaking capacity according to IEC 60947-2	6kA
Rated short-circuit breaking capacity $I_{cn}$ according to EN 61009-1	6kA
Disconnection characteristic	Undelayed
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	B
Concurrently switching neutral conductor	1
With interlocking device	
Over voltage category	3
Pollution degree	2
Ambient temperature during operating	-35...40°C
Width in number of modular spacings	1
Built-in depth	70mm
Anti-nuisance tripping version	
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...10mm <sup>2</sup>
Connectable conductor cross section multi-wired	1...10mm <sup>2</sup>

# Caracteristici

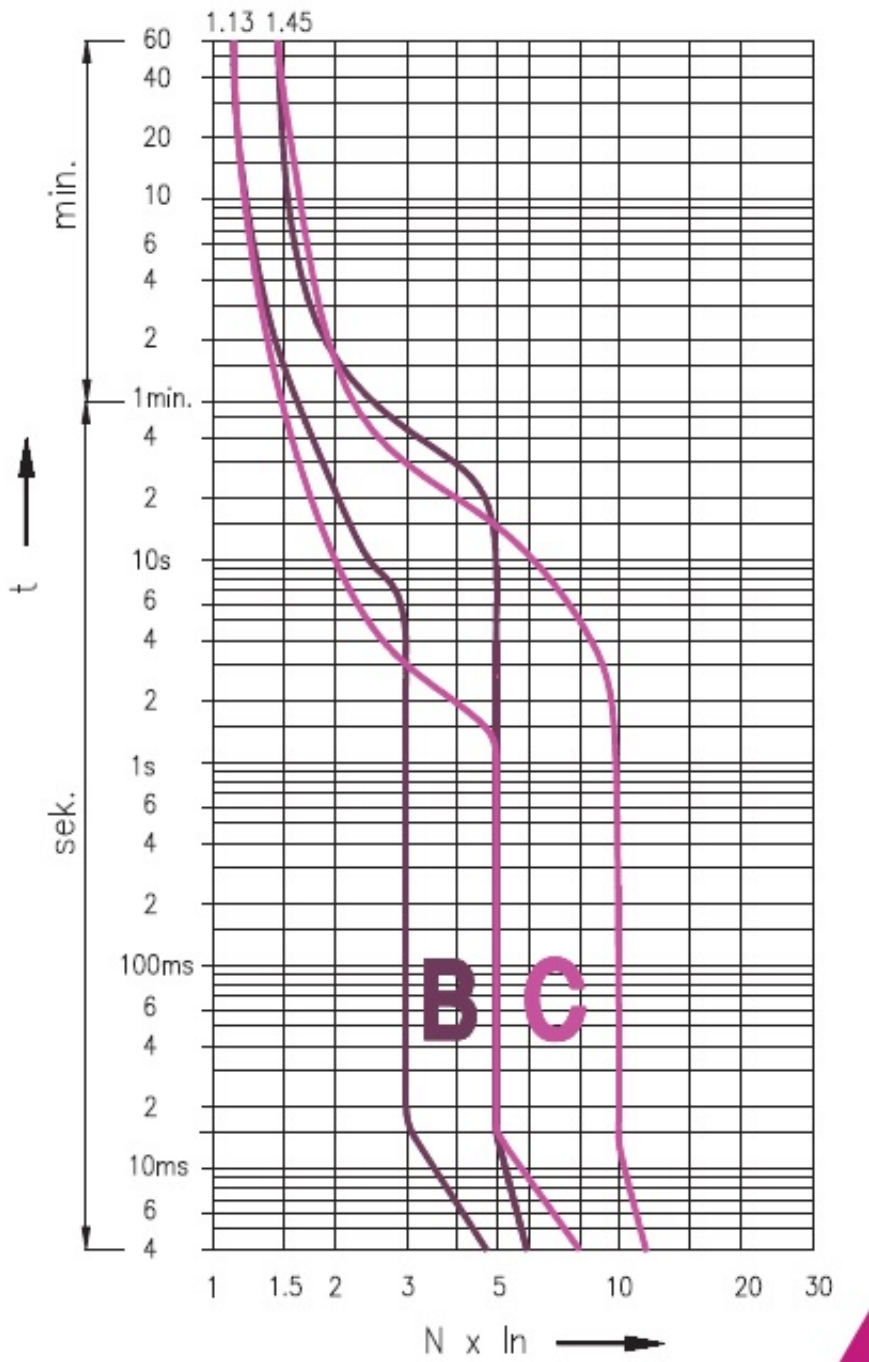

# Desen cotat

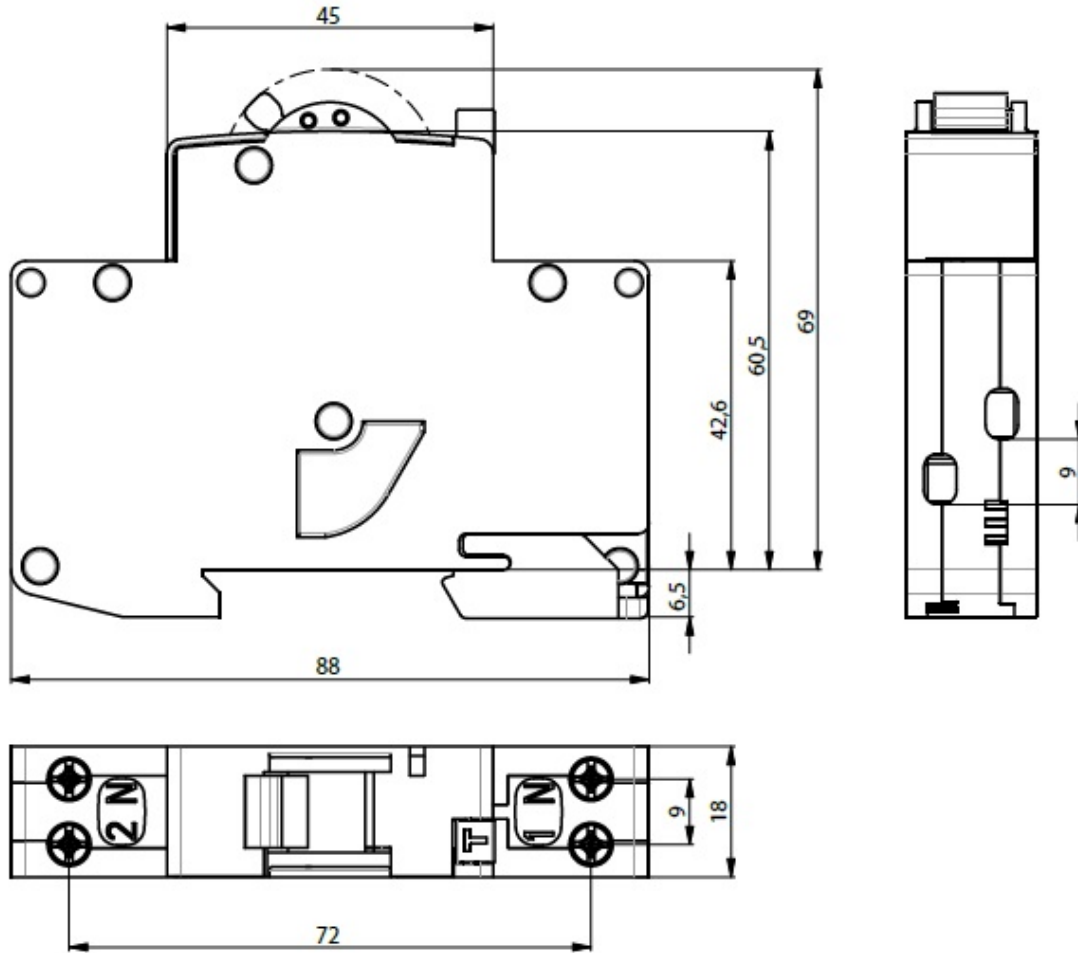

## Simbol/Conexiune

