

# ETIMAT 1N 1p+N B10 6kA



## Specificatii

Cod ETI	002191102
Descriere	ETIMAT 1N 1p+N B10 6kA
Denumire clasă	Înterupător de circuit
Funcție	MCB
Capacitatea de rupere (kA)	6
Caracteristică de întrerupere	B
Curent nominal (A)	10
Tensiunea nominală(V)	230
Număr de poli	1+N
Frecvență nominală (Hz)	50/60
Standarde	IEC/EN 60898-1
Secțiune transversală nominală	1-10
Tipul voltajului	AC
Tensiunea nominală de rezistență Uimp (kV)	4

[Pagina de produse online](#)

## Alta documentatie



[Catalog caracteristici tehnice](#)

[Certificate](#)

[Model 3D](#)

[Manual de instructiuni](#)


[Declaratie CE](#)

[Eplan mușchi](#)

## ETIM clasificare internationala

Clasificare	EC000042
Denumire clasă	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	2
Number of protected poles	1
Rated current	10A
Rated voltage	230V
Rated impulse withstand voltage Uimp	4kV
Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50...50Hz
Current limiting class	3
Concurrently switching neutral conductor	1
Width in number of modular spacings	1
Built-in depth	68mm
Degree of protection (IP)	IP20
Connectable conductor cross section multi-wired	1...10mm <sup>2</sup>
Connectable conductor cross section solid-core	1...10mm <sup>2</sup>

# Caracteristici

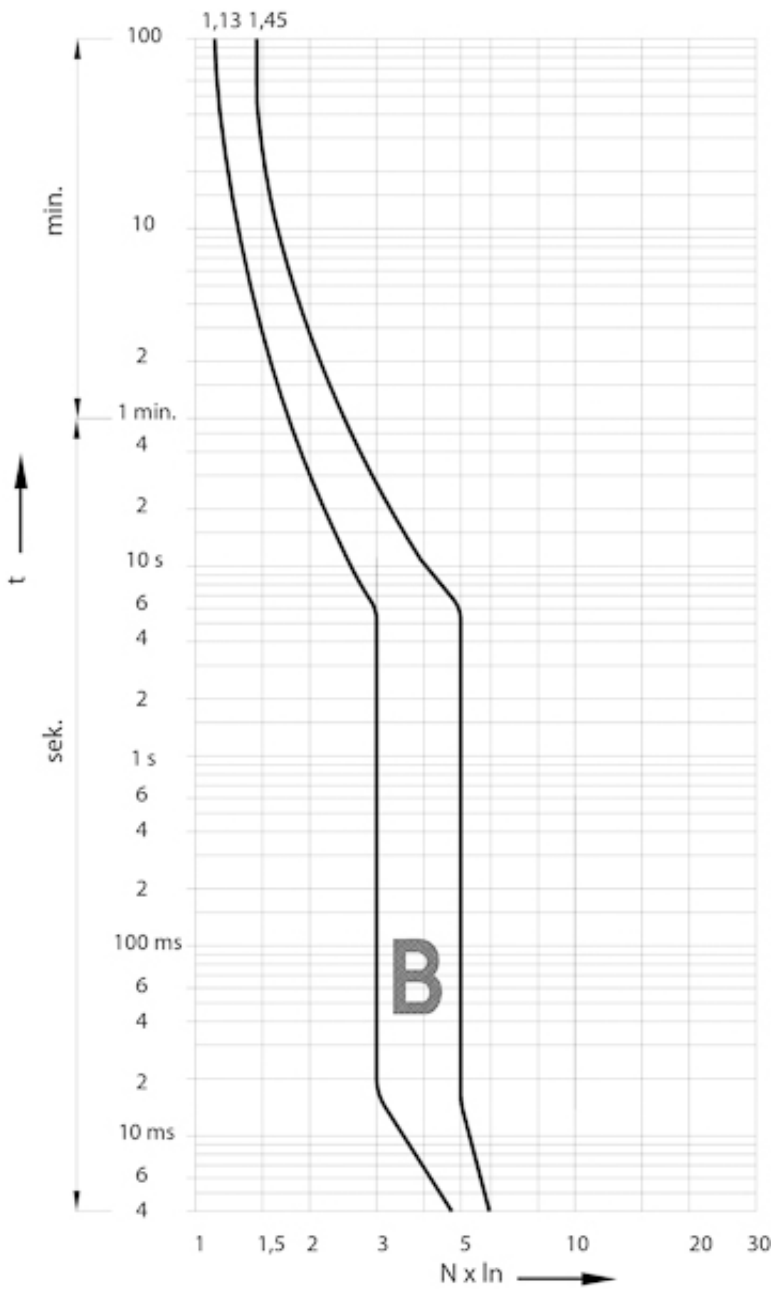

## Desen cotat

