

# ASTROCLOCK-2



## Specificatii

Cod ETI	002472051
Descriere	ASTROCLOCK-2
Denumire clasă	Releu de timp-digital
Func ie	Releu de timp
Curent nominal (A)	16
Număr contacte CO	1
Tipul voltajului	AC
Tensiunea de alimentare (V)	230
Numarul de contacte	2
Interval de timp	Rasarit, apus, timp fix: ON/OFF, REDUC.
Capacitatea maxima de incarcare AC1 (VA)	4000

[Pagina de produse online](#)

## Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)


[Declaratie CE](#)

[Eplan mușchi](#)


## ETIM clasificare internationala

Clasificare	EC002305
Denumire clasă	Digital time switch for distribution board
Mounting method	DIN rail
Number of channels	2
Supply voltage	230...230V
Voltage type (supply voltage)	AC
Frequency supply voltage	50...50Hz
Autonomy in hours	48
Accuracy per day	1s
24 h program	1
Weekly program	1
Holiday program	1
Cycle program	1
Astro program	1
Hour meter	1
Shortest switching time channel 1	0,02min
Shortest switching time channel 2	0,02min
Number of memory locations	40
Automatic switching summer-/winter time	1
Suitable for manual operation	1
Nominal switching current at 250 V AC	16A
Degree of protection (IP)	IP20
Width in number of modular spacings	2
Width	35,5mm
Height	90mm
Depth	65mm

## Desen cotat

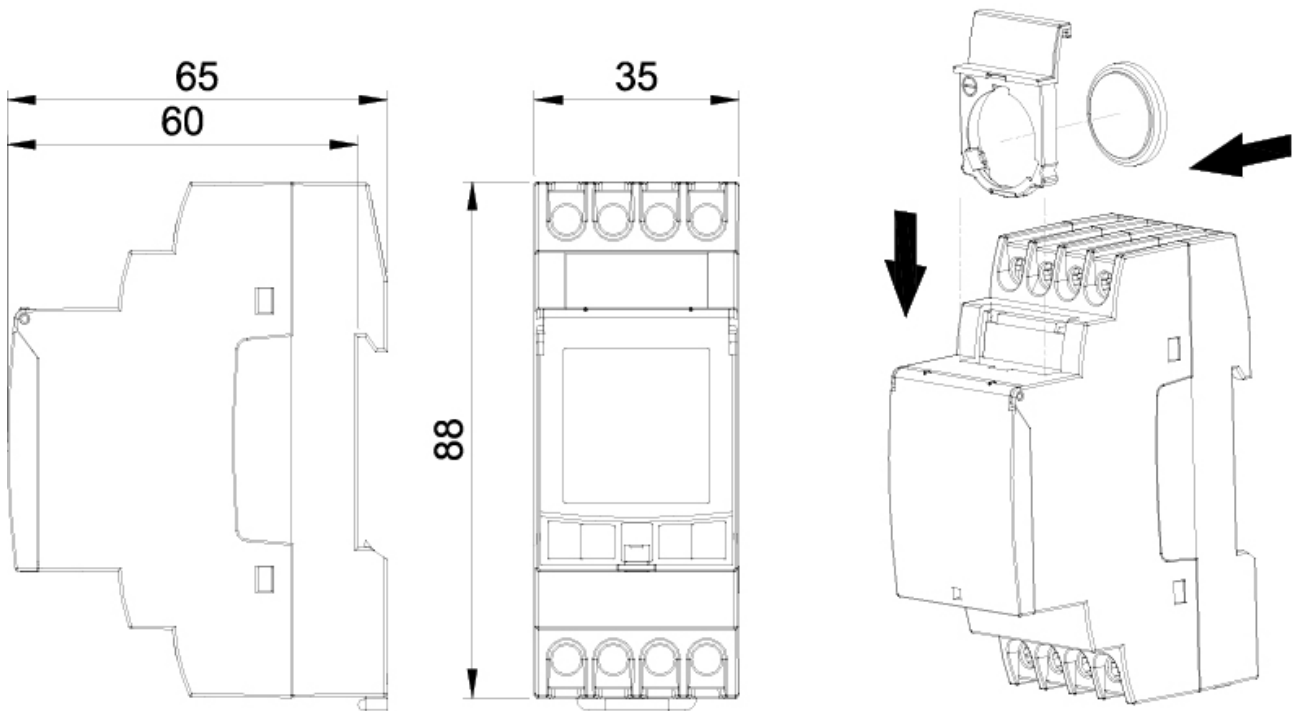

## Simbol/Conexiune



Incandescent	Fluorescent	Low voltage halogen (12 V AC)	Halogen (230 V AC)
<b>3000 W</b>	<b>1200 VA</b>	<b>2000 VA</b>	<b>3000 W</b>
Low consumption lamps	Downlights	LED	
<b>600 VA</b>	<b>400 VA</b>	<b>90 VA</b>	