

# EB2S 160/4SF 16A 4p



## Specificatii

Cod ETI	004671840
Descriere	EB2S 160/4SF 16A 4p
Denumire clasă	Înterupător de circuit în car
Funcie	MCCB
Curent nominal (A)	16
Număr de poli	4
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	25/13
Tensiune nominala de lucru (V DC)	250V
Reglare termica	fixed
Ajustare magnetica	fixed
Reglabil sau fix	Fix

Pagina de produse online

## Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni


Declaratie CE

Eplan mușchi

## ETIM clasificare internationala


Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I <sub>u</sub>	16A
Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz	25kA
Overload release current setting	16...16A
Adjustment range undelayed short-circuit release	600...600A
Integrated earth fault protection	
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	4
Type of control element	Rocker lever
Motor drive integrated	
Motor drive optional	
Degree of protection (IP)	IP20

# Caracteristici

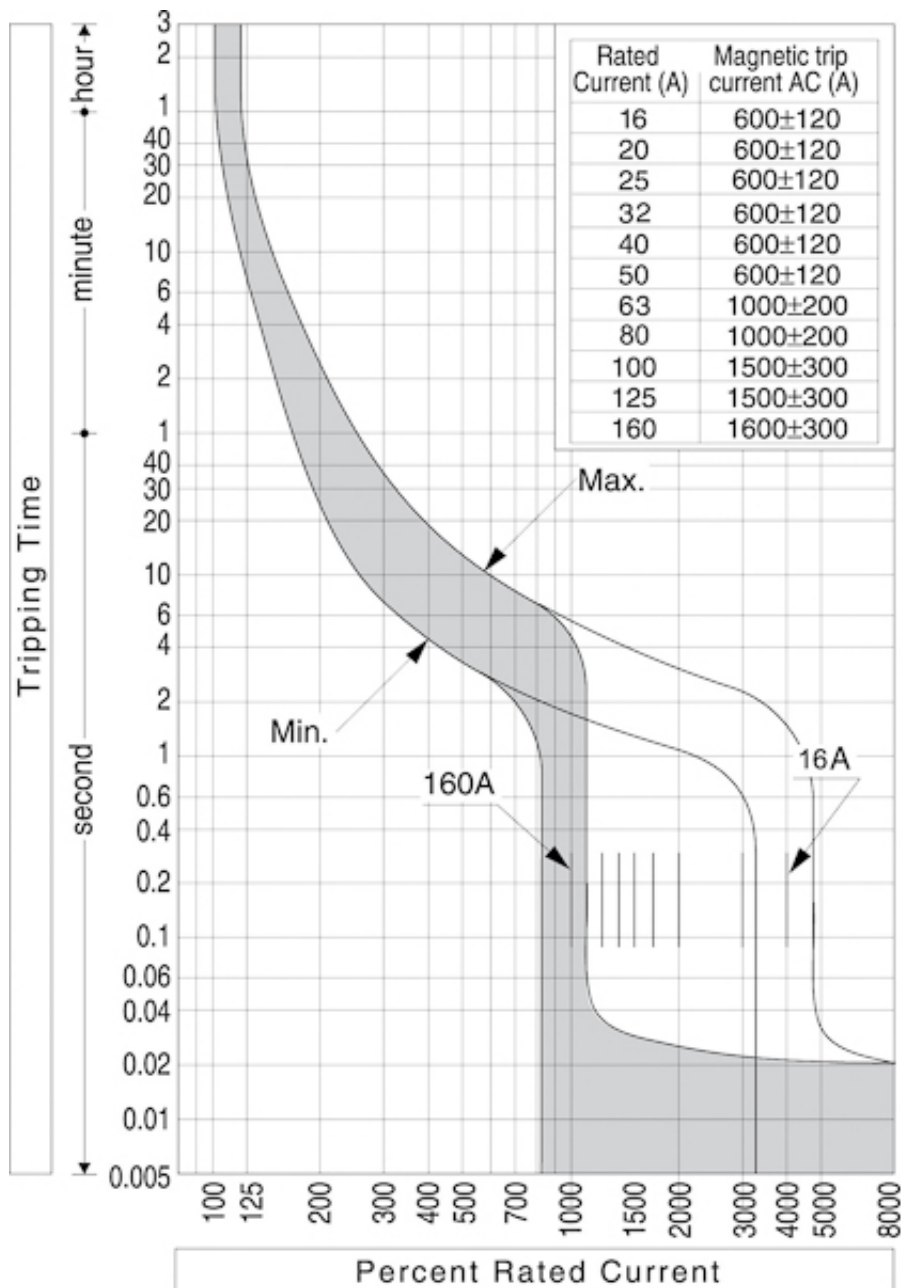

# Desen cotat

EB2S 160 F & A

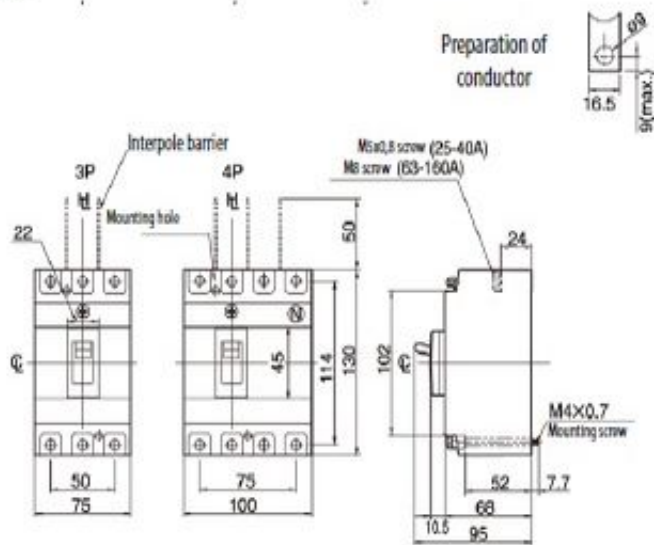

EB2S 250 F & A

